

Linear LED Lighting Systems  
2016 -2017 CATALOG



Client: À la folie • Project Manager: Atelier Moderno & Anne Sophie Gonneau Design • Category: 1000 Series

## About **LUMEN TRUSS**



We are proud to introduce the new **LUMEN TRUSS** catalogue, featuring our extensive range of profiles for architectural LED lighting. Through time, we have created many new extrusions and accessories to suit your very needs.

Our LED profiles are easily installed and are perfect for residential, commercial and industrial purposes. Made in Canada with 6063T-5 aluminum, our LED profiles can be used both indoors and outdoors, in dry or wet locations. They all meet the North-American woodwork-ing standards. Our products are custom-made and available in sections up to 20 linear feet. They are suitable for any space and can be anodized or painted with the color of your choice to match your décor. These extrusions can be installed on a surface, recessed or even installed on a multitude of suspension lights.

Simple or sophisticated, cutting edge control systems are available to control the LUMEN TRUSS products that best suit your projects. Find out about our TFT dimmable drivers on electronic low-voltage dimmers allowing you to connect to different automation systems and controls in place. The uses of the LUMEN TRUSS range are literally limitless! We work daily to expand our range of profiles and accessories to meet all your needs.

# Index



**About Us**  
Inside cover



**Legend**  
Page 2



**How to Order**  
Page 3



**Our Optics**  
Pages 4-5



0,736 in.  
18,7 mm

**1100 Profile**  
Pages 6-7



0,736 in.  
18,7 mm

**1200 Profile**  
Pages 8-9



1,031 in.  
26,2 mm

**1300 Profile**  
Pages 10-11



0,736 in.  
18,7 mm

**1400 Profile**  
Pages 12-13



1,339 in.  
34,0 mm

**1500 Profile**  
Pages 14-15



1,457 in.  
37,0 mm

**1650 Profile**  
Pages 16-17



1,574 in.  
40,0 mm

**1690 Profile**  
Pages 18-19



0,787 in.  
20,0 mm

**2000 Profile**  
Pages 20-21



0,787 in.  
20,0 mm

**2100 Profile**  
Pages 22-23



0,480 in.  
12,2 mm

**4400 Profile**  
Pages 24-25



Ø 0,630 in.  
Ø 16,0 mm

**4500 Profile**  
Pages 26-27




0,728 in.  
18,5 mm

**5200 Profile**  
Page 28



0,856 in.  
21,8 mm

**5300 Profile**  
Page 29




0,9311 in.  
23,65 mm

**5350 Profile**  
Pages 30-31




0,807 in.  
20,5 mm

**6500 Profile**  
Pages 32-33



5,748 in.  
146,0 mm

**7400 (7420) Profile**  
Pages 34-35



5,984 in.  
152,0 mm

**7400 (7450) Profile**  
Pages 36-37



Ø 3,00 in.  
Ø 76,2 mm

**7650 Profile**  
Pages 38-39



1,063 in.  
27,00 mm

**7800 Profile**  
Pages 40-41



Ø 1,299 in.  
Ø 33,0 mm

**7850 Profile**  
Pages 42-43



4,606 in.  
117,00 mm

**7900 Profile**  
Pages 44-45




6,568 in.  
166,82 mm

**8900 Profile**  
Pages 46-47




1,625 in.  
41,28 mm

**9200 Profile**  
Pages 48-49




1,625 in.  
41,28 mm

**9400 Profile**  
Pages 50-51




2,756 in.  
70,00 mm

**9500 Profile**  
Pages 52-53



2,816 in.  
71,52 mm

**9800 Profile**  
Pages 54-55



**Heat sinks and supports**  
Pages 56-57



3,250 in.  
82,55 mm

**Tiga**  
Pages 58-59



1,729 in.  
43,92 mm

**Toobyfor**  
Pages 60-61



1,750 in.  
44,45 mm

**Tao**  
Pages 62-63



2,750 in.  
69,85 mm

**Silo**  
Pages 64-65



2,368 in.  
60,15 mm

**Pike**  
Pages 66-67



0,736 in.  
18,7 mm

**SPL 1400 Ordering Sheet**  
Page 68



1,339 in.  
34,0 mm

**1500 Ordering Sheet**  
Page 69



1,625 in.  
41,28 mm

**SPL 9200 Ordering Sheet**  
Page 70



1,625 in.  
41,28 mm

**9400 Ordering Sheet**  
Page 71



2,756 in.  
70,00 mm

**LumenTruZZ Ordering Sheet**  
Page 72



2,756 in.  
70,00 mm

**RCL 9500 Ordering Sheet**  
Page 73



8,110 in.  
206 mm

**Tube Ordering Sheet**  
Page 74



2 in.  
50,8 mm

**Serzo Ordering Sheet**  
Page 75



10,629 in.  
270,00 mm

**Abora Ordering Sheet**  
Page 76



5,748 in.  
146,0 mm

**7420 Ordering Sheet**  
Page 77



5,984 in.  
152,0 mm

**7450 Ordering Sheet**  
Page 78



5 in.  
127 mm

**Rondo Ordering Sheet**  
Page 79



Ø 3,374 in.  
85,7 mm

**Partner ads**  
Pages 80-83



**Notes**  
Inside back cover

# Legend

## Symbols used and their meaning



Made in in North America (plastic and aluminum components).



Certified by UL (Underwriters Laboratories) for Canada and the United States concerning North American safety and electrical standards governing this product.



Refers to the 6063 standard of 2.68 g/cm density used for architectural applications of the product.



Components recognized by UL (Underwriters Laboratories).



For wet and dry locations.



5 year warranty.



The LED strip can be inserted into a resistant and waterproof silicone sheath, giving it an IP68 grading.



Allows multiple LED strip positions to vary the illumination angle.



Designed to give a uniform light without hot spots with an opal lens and a strip of 120 LEDs per meter or more.



Sets of endcaps and brackets are also available with screws and bolts in stainless steel.



Standard finishing (anodized aluminum).



BLACK

WHITE

CUSTOM COLOR

Choice of extra finishes available on special order (minimum quantities required, please ask one of our specialists).



OILED

Standard finishes (solid wood series).



3M™ DI-NOC™ AR film with superior abrasion and stain resistance properties (Pole Truss).



Custom made series available. Visit our website to download our custom order sheet for this product.



For each of our Lumentruss luminaire that's made with recycled wood from Quebec, a tree will be planted. Help us help the environment!



All our products meet verified carbon standards while not having travelled more than 500 kilometers in their manufacturing process, thus promoting a sustainable development.

We are committed to meet 2020 global carbon emission reduction goals while promoting renewable energy projects. We care about climate change and global warming. Investing in renewable energy is necessary for future generations. We are in it together!



## Warning


### Important electrical notice

1. Use only certified class II components not exceeding 30V DC or 15V AC for installation in wet locations, and a maximum of 60V DC or 42.4V AC for installation in a dry or humid area.
2. Do not exceed 5 amps per circuit from 12VDC or 24VDC, for compliance with Class 2 standards of the American and Canadian electrical code.

# How to order

## Example


For each of the available profiles, you will get a presentation page in this catalog. Following this page, you will find another one containing a detailed list of all compatible components. By referring to the example provided at the bottom of this page, choose the parts needed and indicate them using the quick order codes provided below the components' descriptions (most often in a 4-digit format).

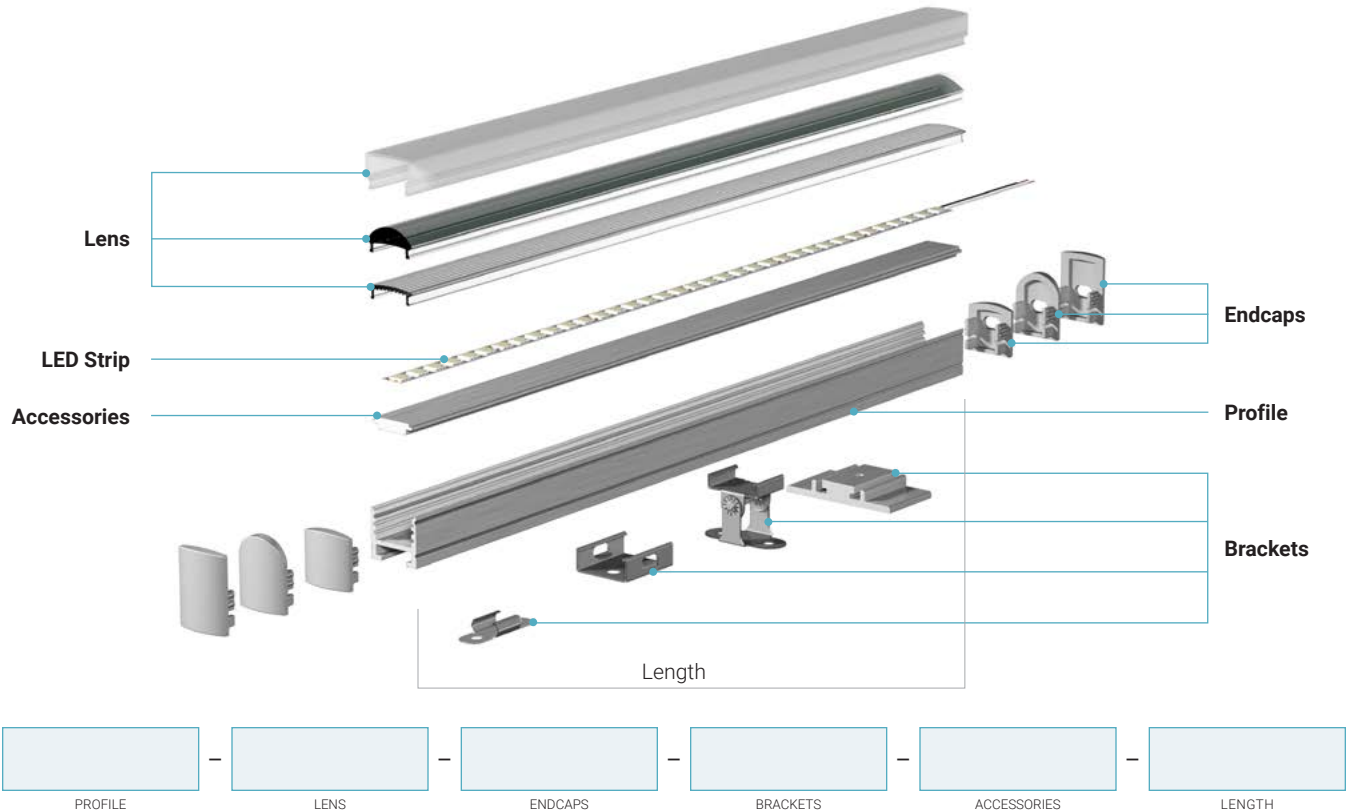

## Usage example

To order a linear lighting fixture using a single LED strip, you can choose a profile from the 1000 Series. For a swiveling floodlight with a narrow beam (featured on the right), you can choose the 1400 profile with a Focus lens and corresponding endcaps (displayed beside each other in the components page for the profile), the swivel surface mount (in brackets), as well as the insert for adjusting the beam angle (in accessories). Finally, specify the needed total length of the fixture.

By default, the length is specified in inches, in accordance with North American woodworking standards. However, should you need to specify sizes in any other imperial or metric system units, please make sure to indicate the units used in the last field (length).

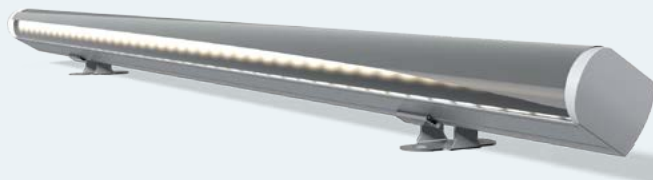

## SEND ORDER :

Email : [orders@lumentruss.com](mailto:orders@lumentruss.com)  
 Phone : 1 855 384 3384  
 Fax : 514-903-0649

## Customize your lighting with our **complete range of lenses**



### Clear

This basic lens is designed to maximize the light output.

- Addition of components to increase flexibility
- Increases CCT of 50-80 Degrees Kelvin
- UL Certification
- UV resistant
- Transmits 96.5% of the original light output from the LED source

### Optiflex




The frosted lens is developed for standard lighting, allowing an optimal light diffusion while maintaining high brightness.

- Addition of components to increase flexibility
- CCT reduction of 120-140 Degrees Kelvin
- UL Certification
- UV resistant
- Transmits 85% of the original light output from the LED source

### Opal

A lens developed for thin profiles, allowing the elimination of the hot spots of the LED light source.

- Faded effect of the light source (minimum 120 LED per meter not the see the dots)
- CCT reduction of 190-240 Degrees Kelvin
- UL Certification
- UV Resistant
- Transmits 65% of the original light output from the LED source



CCT : Correlated Color Temperature






Without lens 



## Spread

With its integrated prismatic grooves, this lens scatters the light and increases the beam angle to better light nearby objects.


- Addition of components to increase flexibility
- CCT reduction of 50-80 Degrees Kelvin
- UL Certification
- UV resistant
- Transmits 95% of the original light output from the LED source



## Focus

A converging lens that is designed to focus the light beam up to 10°, for targeted and focused lighting.

- Addition of components to increase flexibility
- CCT reduction of 50-80 Degrees Kelvin
- UL Certification
- UV resistant
- Focuses the light beam up to 10 degrees
- Transmits 85% of the original light output from the LED source



## Volumetric

Many lenses are available in various volumetric forms and in transparent, opal or Optiflex materials, thus offering a greater creative freedom in the design of unique lighting fixtures.

- Faded effect of the light source (minimum 120 LED per meter not the see the dots)
- CCT reduction of 190-240 Degrees Kelvin
- UL Certification
- UV Resistant
- Transmits 65% of the original light output from the LED source




# 1100 Profile

1200 (LM22190)



# 1000 Series

Dimensional drawing



This profile is **the thinnest of the 1000 Series** being only **6mm thick** and 18.7mm wide and is compatible with most of our LED strips. Perfect for tight spots, it will be very discreet and will stand out.

## Features

- The most compact profile of the 1000 Series, only 6mm thick.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8 inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.

## Options



## LED strip compatibility

Compatible with LED strips up to **14mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




















# 1100 Profile

Components and accessories

# 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <b>1100 Profile</b> <b>1200</b> (LM22190)	 <b>Standard, Clear</b> <b>1269</b> (LM22298)		 <b>Flat bracket</b> <b>1280</b> (LM22306)	Custom length by sections of 2 to 240 inches (6m).
	 <b>Standard, Spread</b> <b>1265</b> (LM22294)		 <b>45° bracket</b> <b>1283</b> (LM22307)	
	 <b>Standard, Optiflex</b> <b>1261</b> (LM22290)	 <b>Standard 1100</b> <b>1294</b> (LM22299-11 WITHOUT HOLE) <b>1295</b> (LM22299-15 HOLE)	 <b>Swivel Bracket 180°</b> <b>1286</b> (LM22308)	
	 <b>Standard, Opal</b> <b>1263</b> (LM22292)			
	 <b>Square 3D, Optiflex</b> <b>1262</b> (LM22290-5)	 <b>Square 3D 1100</b> <b>1188</b> (LM22299-25 WITHOUT HOLE) <b>1189</b> (LM22299-21 HOLE)		
	 <b>Square 3D, Opal</b> <b>1264</b> (LM22292-5)			
	 <b>Round 3D, Optiflex</b> <b>1252</b> (LM22290-7)	 <b>Round 3D 1100</b> <b>1190</b> (LM22299-35 WITHOUT HOLE) <b>1191</b> (LM22299-31 HOLE)		
	 <b>Round 3D, Opal</b> <b>1254</b> (LM22292-7)			




# 1200 Profile

1210 (LM22200)



# 1000 Series

Dimensional drawing



**Lighting without hot spots!** Here is a profile designed to ensure that the LED source is invisible\*, offering uniform and soft lighting for the eyes. A compact and versatile luminaire!

## Options



## LED strip compatibility

Compatible with LED strips up to **14mm** wide.

## Features

- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.













- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# 1200 Profile

Components and accessories

# 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>1200 Profile <b>1210</b> (LM22200)</p>	 <p>Standard, Clear <b>1269</b> (LM22298)</p>		 <p>Flat bracket <b>1280</b> (LM22306)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1200 Profile Black <b>1215</b> (LM22200-01)</p>	 <p>Standard, Spread <b>1265</b> (LM22294)</p>	 <p>Standard 1200 <b>1270</b> (LM22300-05 WITHOUT HOLE) <b>1273</b> (LM22300-01 HOLE)</p>	 <p>45° bracket <b>1283</b> (LM22307)</p>	
	 <p>Standard, Optiflex <b>1261</b> (LM22290)</p>		 <p>Swivel Bracket 180° <b>1286</b> (LM22308)</p>	
	 <p>Standard, Opal <b>1263</b> (LM22292)</p>			
	 <p>Standard, Focus <b>1267</b> (LM22296)</p>	 <p>Focus 1200 <b>1470</b> (LM22304-05 WITHOUT HOLE) <b>1473</b> (LM22304-01 HOLE)</p>		




# 1300 Profile

1220 (LM22210)



# 1000 Series

Dimensional drawing



Here is a **compact and recessed** profile allowing you to make the light source and the LED invisible\*. The edges on each side of this extrusion allow recessed installation giving it style with a discreet and neat appearance.

## Features

- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.


## Options



## LED strip compatibility

Compatible with LED strips up to **14mm** wide.



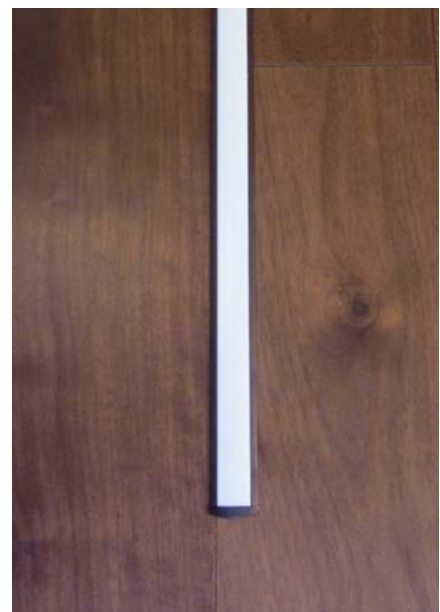






- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# 1300 Profile

Components and accessories


# 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>1300 Profile <b>1220</b> (LM22210)</p>	 <p>Standard, Clear <b>1269</b> (LM22298)</p>  <p>Standard, Spread <b>1265</b> (LM22294)</p>  <p>Standard, Optiflex <b>1261</b> (LM22290)</p>  <p>Standard, Opal <b>1263</b> (LM22292)</p>	 <p>Standard 1300 <b>1274</b> (LM22301-05 WITHOUT HOLE) <b>1277</b> (LM22301-01 HOLE)</p>	 <p>Flat bracket <b>1280</b> (LM22306)</p>  <p>45° bracket <b>1283</b> (LM22307)</p>  <p>Swivel Bracket 180° <b>1286</b> (LM22308)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
<p><b>1220</b></p> <p>PROFILE</p>	<p>LENS</p>	<p>ENDCAPS</p>	<p>BRACKETS</p>	<p>LENGTH</p>




# 1400 Profile

1230 (LM22220)

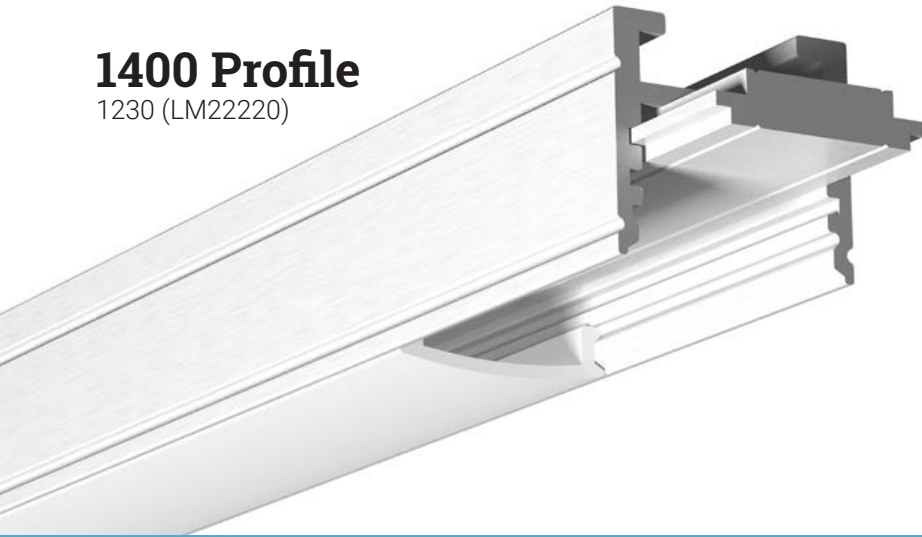

# 1000 Series

Dimensional drawing



**Say hello to versatility!** In addition to offering even lighting\*, the 1400 allows adjustment of the projection angle<sup>(1)</sup> as well as a wide choice of installation options<sup>(2)</sup>.

(1) With an adjustable aluminum rail. (2) More than 500 configurations are possible!

## Features

- Possible aluminum insert of 19.05mm (3/4-inch) wide of 2 different heights for the strip, offering a total of 5 position options for the LED light source, which allows defining the angle of lighting.
- The support rail offers the largest range of installation and assembly.
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (over 40 options).

## Options



## LED strip compatibility

Compatible with LED strips up to **14mm** wide.





































- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




# 1400 Profile

Components and accessories


# 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>1400 Profile <b>1230</b> (LM22220)</p>	 <p>Standard, Clear <b>1269</b> (LM22298)</p>		 <p>Flat bracket <b>1280</b> (LM22306)</p>	 <p>Rail Insert 3/4 in. <b>1235</b> (LM22221-1)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1400 Profile Black <b>1232</b> (LM22220-3)</p>	 <p>Standard, Spread <b>1265</b> (LM22294)</p>	 <p>Standard 1400 <b>1476</b> (LM22304-45 WITHOUT HOLE) <b>1441</b> (LM22304-41 HOLE)</p>	 <p>45° bracket <b>1283</b> (LM22307)</p>	 <p>Horz joiner straight <b>1325</b> (LM22335-01)</p>	
	 <p>Standard, Optiflex <b>1261</b> (LM22290)</p>	 <p>Standard 1400, Black <b>1479</b> (LM22304-85 WITHOUT HOLE) <b>1451</b> (LM22304-81 HOLE)</p>	 <p>Swivel Bracket 180° <b>1286</b> (LM22308)</p>	 <p>Horz joiner 45° corner <b>1328</b> (LM22335-07)</p>	
	 <p>Standard, Opal <b>1263</b> (LM22292)</p>		 <p>Phantom <b>1290</b> (LM22310)</p>	 <p>Horz joiner 90° corner <b>1326</b> (LM22335-03)</p>	
	 <p>Standard, Focus <b>1267</b> (LM22296)</p>	 <p>Focus 1400 <b>1480</b> (LM22305-15 WITHOUT HOLE) <b>1461</b> (LM22305-11 HOLE)</p>	 <p>2 magnet kit <b>1316</b> (LM22330)</p>	 <p>Vert joiner 90° corner <b>1327</b> (LM22335-05)</p>	
		 <p>Focus 1400, Black <b>1486</b> (LM22305-65 WITHOUT HOLE) <b>1444</b> (LM22305 HOLE)</p>	 <p>Susp. Kwik-Gripper 1/4"-20NC <b>1497</b> (LM22335-31)</p>	 <p>Threaded tube M10 X 1.0 <b>1511</b> (LM22335-40)</p>	
	 <p>Square 3D, Optiflex <b>1262</b> (LM22290-5)</p>	 <p>Square 3D 1400 <b>1488</b> (LM22305-71 WITHOUT HOLE) <b>1447</b> (LM22305-70 HOLE)</p>	 <p>Susp. Kwik-Gripper M10 X 1.0 <b>1493</b> (LM22335-11)</p>	 <p>Threaded tube 3/8"-16NC <b>1512</b> (LM22335-41)</p>	
	 <p>Square 3D, Opal <b>1264</b> (LM22292-5)</p>	 <p>Square 3D 1400, Black <b>1489</b> (LM22305-73 WITHOUT HOLE) <b>1448</b> (LM22305-72 HOLE)</p>	 <p>Insert bracket M10 X 1.0 <b>1494</b> (LM22335-15)</p>	 <p>Threaded tube 1/4"-20NC <b>1513</b> (LM22335-42)</p>	
			 <p>Insert bracket 3/8"-16NC <b>1495</b> (LM22335-21)</p>		
			 <p>Insert bracket 1/4"-20NC <b>1496</b> (LM22335-25)</p>		
			 <p>Wall support bracket silver <b>1318</b> (LM22325-01)</p>		
			 <p>Wall support bracket black <b>1319</b> (LM22325-05)</p>		
			 <p>Spring bracket <b>1570</b> (LM22336)</p>		




## 1500 Profile

1500 (LM22230-01)

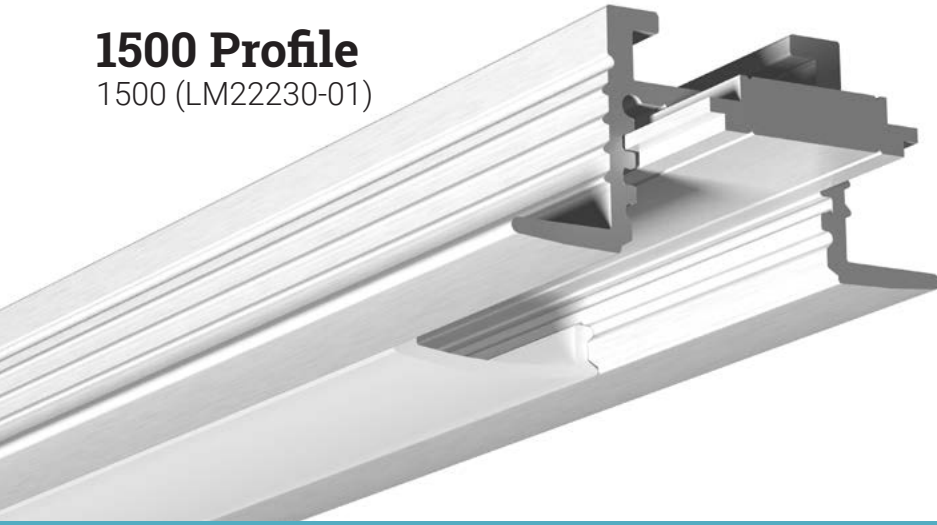

## 1000 Series

Dimensional drawing



**Recessed profile with adjustable angle!** The edge design of the 1500 profile harmonizes your décor and allows a very solid recessed installation. In addition, it offers the possibility of adjusting the projection angle<sup>(1)</sup> and provides lighting without hotspots\*.

(1) With an adjustable aluminum rail.

### Features

- Possible aluminum insert of 19.05mm (3/4-inch) wide of 2 different heights for the strip, offering a total of 5 position options for the LED light source, which allows defining the angle of lighting.
- The support rail offers the largest range of installation and assembly.
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (over 40 options).

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.




























- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




# 1500 Profile

Components and accessories

# 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>1500 Profile 1500 (LM22230-01)</p>	 <p>Standard, Clear 1269 (LM22298)</p>  <p>Standard, Spread 1265 (LM22294)</p>  <p>Standard, Optiflex 1261 (LM22290)</p>  <p>Standard, Opal 1263 (LM22292)</p>	 <p>Standard 1500 Alu 1571 (LM22305-85)</p>	 <p>Flat bracket 1280 (LM22306)</p>  <p>45° bracket 1283 (LM22307)</p>  <p>Swivel Bracket 180° 1286 (LM22308)</p>  <p>Phantom 1290 (LM22310)</p>  <p>2 magnet kit 1316 (LM22330)</p>  <p>Susp. Kwik-Gripper 1/4"-20NC 1497 (LM22335-31)</p>  <p>Susp. Kwik-Gripper M10 X 1.0 1493 (LM22335-11)</p>  <p>Insert bracket M10 X 1.0 1494 (LM22335-15)</p>  <p>Insert bracket 3/8"-16NC 1495 (LM22335-21)</p>  <p>Insert bracket 1/4"-20NC 1496 (LM22335-25)</p>  <p>Wall support bracket silver 1318 (LM22325-01)</p>  <p>Wall support bracket black 1319 (LM22325-05)</p>  <p>Spring bracket 1570 (LM22336)</p>	 <p>Rail Insert 3/4 in. 1235 (LM22221-1)</p>  <p>Horz joiner straight 1325 (LM22335-01)</p>  <p>Horz joiner 45° corner 1328 (LM22335-07)</p>  <p>Horz joiner 90° corner 1326 (LM22335-03)</p>  <p>Vert joiner 90° corner 1327 (LM22335-05)</p>  <p>Threaded tube M10 X 1.0 1511 (LM22335-40)</p>  <p>Threaded tube 3/8"-16NC 1512 (LM22335-41)</p>  <p>Threaded tube 1/4"-20NC 1513 (LM22335-42)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>






## 1650 Profile

1650 (LM22240)



## 1000 Series

Dimensional drawing



**Practical and aesthetic**, the 1650 is **the sleekest profile for POP displays**. Offering a 30° angle, it has a very aesthetic look with its curved appearance. Optimize the lighting of the items on your shelves and racks with this versatile profile, in addition to providing lighting without hot spots\*. The 1650 allows diffusion at an excellent range with its angle of projection of 30°. Use our clear lens with this profile to maximize the light output.

### Features

- Profile designed to light articles in displays and shelves.
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.
- Designed to meet North-American woodworking standards.

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)
















# 1650 Profile

Components and accessories


## 1000 Series

PROFILE	LENSES	ENDCAPS	LENGTH
 <p>1650 Profile <b>1650</b> (LM22240) <i>Includes 3M mounting tape</i></p>	 <p>Standard, Clear <b>1269</b> (LM22298)</p>	 <p>1650 left endcap <b>1671</b> (LM22305-92 WITHOUT HOLE)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1650 Profile Black <b>1651</b> (LM22240-01) <i>Includes 3M mounting tape</i></p>	 <p>Standard, Spread <b>1265</b> (LM22294)</p>	 <p>1650 right endcap <b>1673</b> (LM22305-94 WITHOUT HOLE)</p>	
	 <p>Standard, Optiflex <b>1261</b> (LM22290)</p>	 <p>1650 left endcap, black <b>1674</b> (LM22305-95 WITHOUT HOLE)</p>	
	 <p>Standard, Opal <b>1263</b> (LM22292)</p>	 <p>1650 right endcap <b>1676</b> (LM22305-96 WITHOUT HOLE)</p>	



# 1690 Profile


1690 (LM22250)

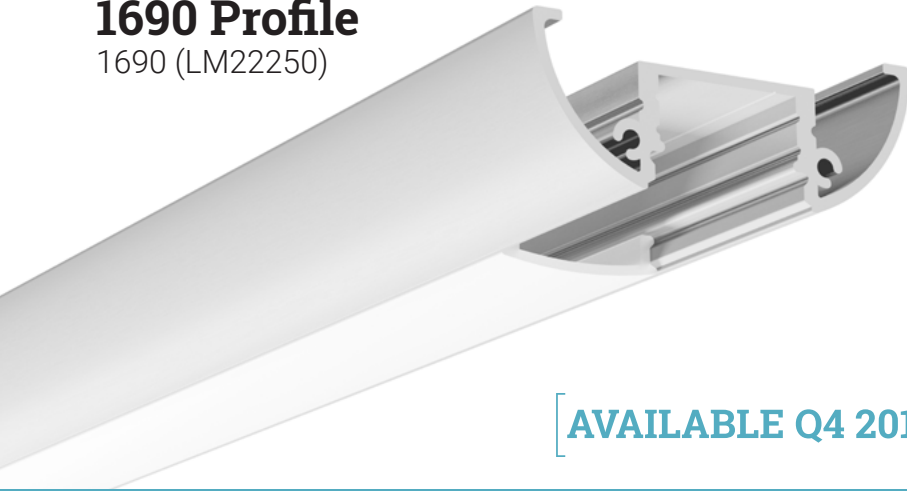

[AVAILABLE Q4 2016]

# 1000 Series

Dimensional drawing



A sleek rounded profile especially **designed to conceal brackets and wires**. The 1690 is mostly used under cabinets. It can also serve many other purposes, such as mural fixtures.

## Options



## Features

- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.

## LED strip compatibility

Compatible with LED strips up to **14mm** wide.










- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




# 1690 Profile

Components and accessories


## 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>1690 Profile <b>1690</b> (LM22250)</p>	 <p>Standard, Clear <b>1269</b> (LM22298)</p>	 <p>1690 endcap, Alu <b>1695</b> (LM22250-05 WITHOUT HOLE) <b>1691</b> (LM22250-01 HOLE)</p>	 <p>Flat bracket <b>1280</b> (LM22306)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1690 Profile, black <b>1691</b> (LM22250-01)</p>	 <p>Standard, Spread <b>1265</b> (LM22294)</p>	 <p>1690 endcap, black <b>1696</b> (LM22250-06 WITHOUT HOLE) <b>1698</b> (LM22250-08)</p>		
	 <p>Standard, Optiflex <b>1261</b> (LM22290)</p>			
	 <p>Standard, Opal <b>1263</b> (LM22292)</p>			




# 2000 Profile

2010 (LM22350)

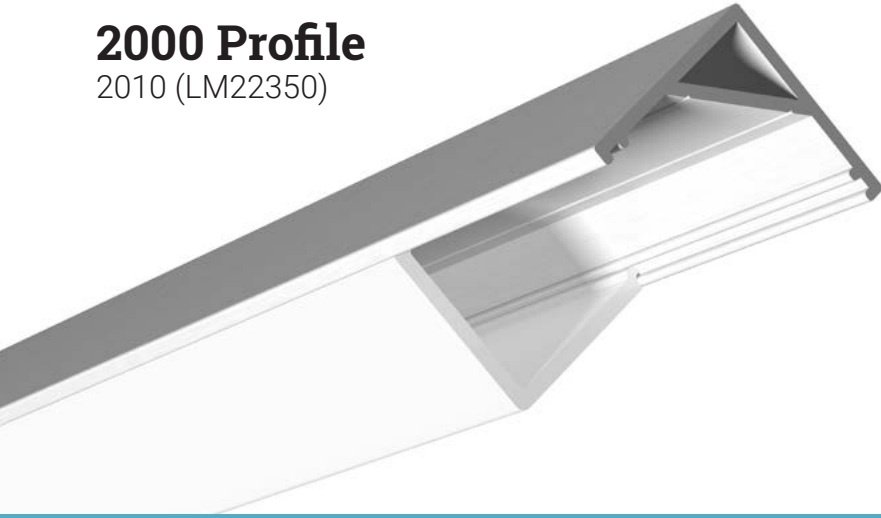

## 2000 Series

Dimensional drawing



**Well focused on the task!** Offering lighting at **45°** without hot spots\*, the 2000 Series excels in lighting products in sales stands, keeping a minimalist style.

### Features

- Offers 45° oriented lighting
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# 2000 Profile

Components and accessories


# 2000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <ul style="list-style-type: none"> <li>2000 Profile Round <b>2010</b> (LM22350)</li> <li>2000 Profile Square <b>2020</b> (LM22352)</li> </ul>	 <ul style="list-style-type: none"> <li>2000 Round, Clear <b>2037</b> (LM22368)</li> </ul>	 <ul style="list-style-type: none"> <li>Round 2000-2100 Right <b>2171</b> (LM22392-03 WITHOUT HOLE) <b>2170</b> (LM22392-01 HOLE)</li> </ul>	 <ul style="list-style-type: none"> <li>Bracket, 2000 Series <b>2060</b> (LM22390)</li> </ul>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <ul style="list-style-type: none"> <li>2000 Round, Optiflex <b>2034</b> (LM22364)</li> </ul>	 <ul style="list-style-type: none"> <li>Round 2000-2100 Left <b>2173</b> (LM22392-07 WITHOUT HOLE) <b>2172</b> (LM22392-05 HOLE)</li> </ul>		
	 <ul style="list-style-type: none"> <li>2000 Round, Opal <b>2030</b> (LM22360)</li> </ul>			
	 <ul style="list-style-type: none"> <li>2000 Square, Optiflex <b>2035</b> (LM22366)</li> </ul>	 <ul style="list-style-type: none"> <li>Square 2000 <b>2050</b> (LM22380-05 WITHOUT HOLE) <b>2053</b> (LM22380-01 HOLE)</li> </ul>		
	 <ul style="list-style-type: none"> <li>2000 Square, Opal <b>2031</b> (LM22362)</li> </ul>			
<b>2020</b>				
PROFILE	LENS	ENDCAPS	BRACKETS	LENGTH




## 2100 Profile

2100 (LM22354-01)

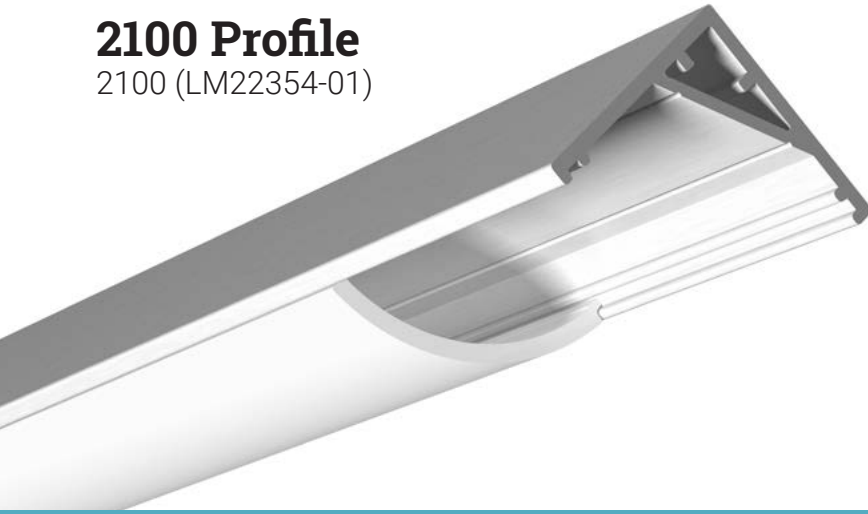

## 2000 Series

Dimensional drawing



The 2100 is **designed to allow more specific angles**. The base for LED strip of the 2100 can be directed to project at **30°** or **60°**, offering two projection angles to control the lighting of the subject in the finest details and without hot spots\*.

### Features

- Lighting oriented at 30° or 60° without any special hardware.
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.








- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# 2100 Profile

Components and accessories

# 2000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>2100 Profile <b>2100</b> (LM22354-01)</p>	 <p>2000 Round, Clear <b>2037</b> (LM22368)</p>	 <p>Round 2000-2100 Right <b>2171</b> (LM22392-03 WITHOUT HOLE) <b>2170</b> (LM22392-01 HOLE)</p>	 <p>Bracket, 2000 Series <b>2060</b> (LM22390)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>2000 Round, Optiflex <b>2034</b> (LM22364)</p>	 <p>Round 2000-2100 Left <b>2173</b> (LM22392-07 WITHOUT HOLE) <b>2172</b> (LM22392-05 HOLE)</p>		
	 <p>2000 Round, Opal <b>2030</b> (LM22360)</p>			




# 4400 Profile

4024 (LM22483-5)



# 4000 Series

Dimensional drawing



## One of the smallest on the market, guaranteed to be discreet!

The 4400 profile is reduced to a minimum with its size of less than a half-inch, while accepting a standard LED strip\*.

\* Accepts LED strips up to 8mm wide.

### Features

- Ultra-compact aluminum profile of 12.2mm wide by 12.2mm high.
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.
- Designed to meet North-American woodworking standards.

### Options



### LED strip compatibility

Compatible with LED strips up to **8mm** wide.










- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)



# 4400 Profile

Components and accessories

# 4000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>4400 Profile <b>4024</b> (LM22483-5)</p>	 <p>4000 Clear <b>4032</b> (LM22484-3)</p>	 <p>4400 Square <b>4052</b> (LM22499-05 WITHOUT HOLE) <b>4053</b> (LM22499-01 HOLE)</p>	 <p>Bracket 4400 <b>4064</b> (LM22490-3)</p>	 <p>Horz joiner straight <b>4037</b> (LM22486-3)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>4000 Optiflex <b>4034</b> (LM22484-5)</p>			 <p>Horz joiner 45° corner <b>4036</b> (LM22486-1)</p>	
	 <p>4000 Opal <b>4030</b> (LM22484-1)</p>			 <p>Horz joiner 90° corner <b>4038</b> (LM22486-5)</p>	
<div style="border: 1px solid black; padding: 5px; text-align: center;"><b>4024</b></div> <p>PROFILE</p>	<div style="border: 1px solid black; width: 100px; height: 15px;"></div> <p>LENS</p>	<div style="border: 1px solid black; width: 100px; height: 15px;"></div> <p>ENDCAPS</p>	<div style="border: 1px solid black; width: 100px; height: 15px;"></div> <p>BRACKETS</p>	<div style="border: 1px solid black; width: 100px; height: 15px;"></div> <p>ACCESSORIES</p>	<div style="border: 1px solid black; width: 100px; height: 15px;"></div> <p>LENGTH</p>


# 4500 Profile

4022 (LM22482-3)



# 4000 Series

Dimensional drawing



The time has come to unveil one of our secrets. Here is our magic wand! The 4500 is the most versatile display solution. **With its ultra-compact size** and its **exceptional range of angles**, accepting most LED strips<sup>(1)</sup>, you will find a thousand ways to install it with its wide variety of accessories.

(1) Accepts LED strips ranging up to 10mm wide.

## Features

- Ultra-compact size with a diameter of only 16mm.
- Easy-to-install brackets to adjust the projection angle as desired.
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (over 40 options).


## Options



## LED strip compatibility

Compatible with LED strips up to **10mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)

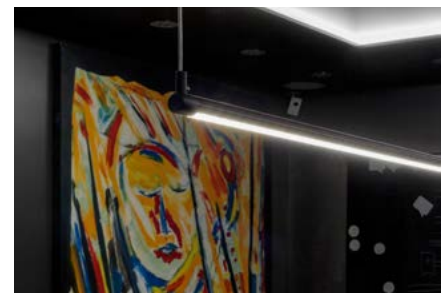















# 4500 Profile

Components and accessories

# 4000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>4500 Profile <b>4022</b> (LM22482-3)</p>	 <p>4000 Clear <b>4032</b> (LM22484-3)</p>	 <p>4500 round alu <b>4050</b> (LM22497-11 WITHOUT HOLE) <b>4055</b> (LM22497-15 HOLE)</p>	 <p>Surface 4500 round <b>4062</b> (LM22490-1)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>4500 Profile Black <b>4021</b> (LM22482-5)</p>	 <p>4000 Optiflex <b>4034</b> (LM22484-5)</p>	 <p>4500 round alu black <b>4051</b> (LM22497-35 WITHOUT HOLE) <b>4056</b> (LM22497-31 HOLE)</p>	 <p>"U" bracket alu <b>4065</b> (LM22501-1)</p>	
	 <p>4000 Opal <b>4030</b> (LM22484-1)</p>		 <p>"P" bracket alu <b>4067</b> (LM22501-5)</p>	
			 <p>Arm Kit Vert Surface <b>4090</b> (LM22495-1)</p>	
			 <p>Arm Kit Vert Insert <b>4092</b> (LM22495-3)</p>	
			 <p>Arm Kit Horz Surface <b>4070</b> (LM22492-1)</p>	
			 <p>Arm Kit Horz Insert <b>4072</b> (LM22492-3)</p>	



# 5200 Profile


5020 (LM22510-5)



This profile is made of **flexible acrylic with a strip support tab made of aluminum** for better heat dissipation. This outstanding extrusion is recessed and has a tubular appearance. The 5200 profile consists of a curved half-moon-shaped lens and a support for the LED strip giving a cabinet, storage or wall lamp. It is economical and without hot spots\*.


## Features

- Designed to give a uniform light without hot spots with an opal lens and a strip of 120 LEDs per meter or more.
- The recessed lamp has a height of 8mm (0.31 inch) from the wall.
- The support tab for the LED strip is made of aluminum for better heat dissipation.
- The minimal depth of the hole is 8.5mm (1/3 inch) and the width is of 17mm (2/3 inch)
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.

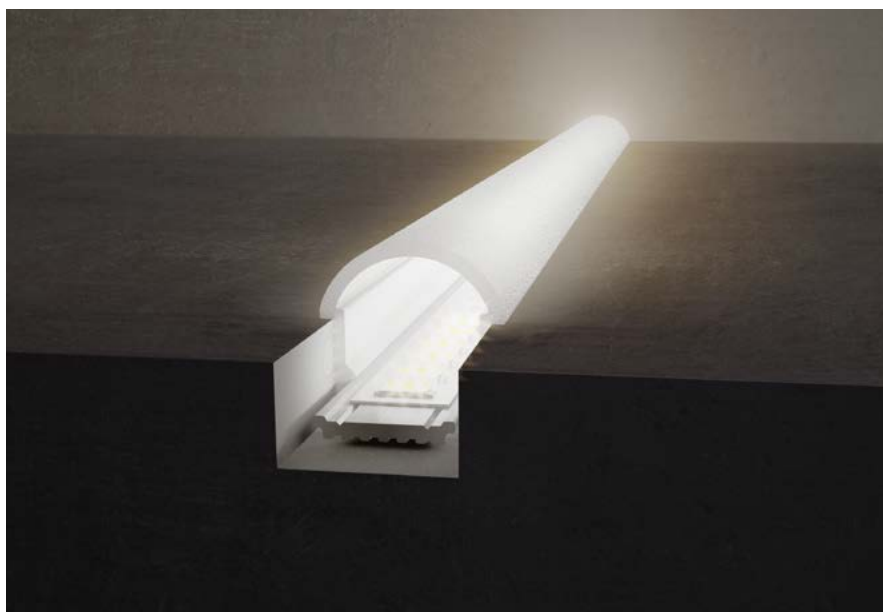

# 5000 Series

Dimensional drawing



## Options



## LED strip compatibility

Compatible with LED strips up to **10mm** wide

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)

# 5200 Profile

Components and accessories

PROFILE

LENGTH



Custom length by sections of 96 inches (2.44m).

5200 Round  
5020 (LM22510-5)  
Included Support

5020

PROFILE

LENGTH


# 5300 Profile

5010 (LM22510-1)



# 5000 Series

Dimensional drawing



This **profile is made of flexible acrylic with a strip support tab made of aluminum** for better heat dissipation. This outstanding extrusion is recessed with a slight edge on each side. The 5300 profile consists of a built-in lens with edges and a support for the LED strip giving a cabinet, storage or wall lamp.

## Features

- The recessed lamp has a height of 8mm (0.31 inch) from the wall.
- The support tab for the LED strip is made of aluminum.
- The minimal depth of the hole is 8.5mm (1/3 inch) and the width is 17mm (2/3 inch).
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.


## Options



## LED strip compatibility

Compatible with LED strips up to **10mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)

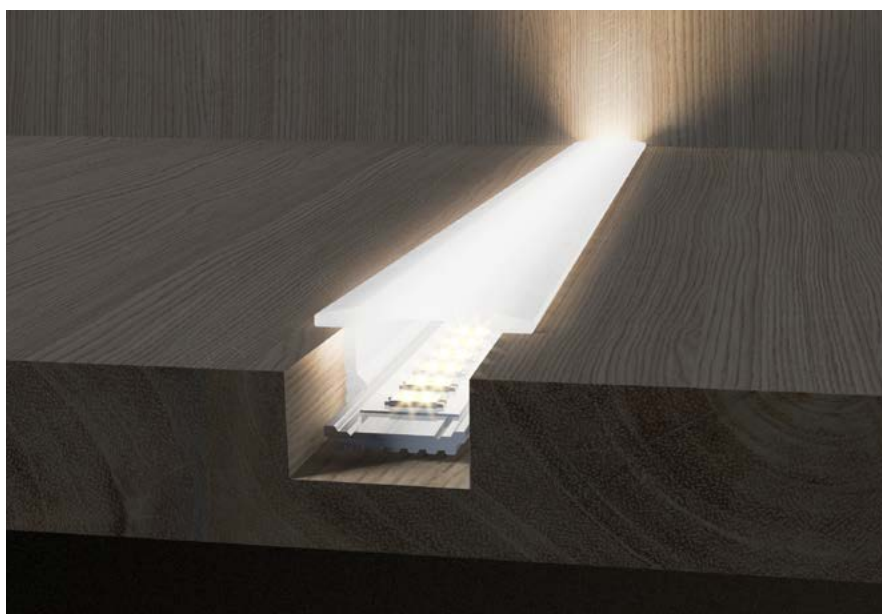

# 5300 Profile

Components and accessories

PROFILE

LENGTH



Custom length by sections of 96 inches (2.44m).

5300 Flush  
5010 (LM22510-1)  
Included Support

5010

PROFILE

LENGTH


# 5350 Profile

5350 (LM22520)



# 5000 Series

Dimensional drawing



Here is a **compact and recessed** profile allowing you to make the light source and the LED invisible\*. The edges on each side of this extrusion allow recessed installation giving it style with a discreet and neat appearance.

## Features

- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.

## Options



## LED strip compatibility

Compatible with LED strips up to **10mm** wide.




- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




# 5350 Profile

Components and accessories

## 5000 Series

PROFILE	LENSES	ENDCAPS	LENGTH
 5350 Profile 5350 (LM22520)	 5350 Opal 5040 (LM22520-40)	 Standard 5350 Alu 5005 (LM22520-05 WITHOUT HOLE) 5001 (LM22520-01 HOLE)	Custom length by sections of 2 to 96 inches (2.44m).





## 6500 Profile


6500 (LM22800-01)



[AVAILABLE Q4 2016]

## 6000 Series

Dimensional drawing




**Style and elegance in a compact format!** The 6500 model is designed to accommodate a single lens in a very distinguished manner. It is designed to provide a thin tubular suspended lamp with a wide lighting angle.

### Features

- Designed to give a uniform light without hot spots with an opal lens and a strip of 120 LEDs per meter or more.
- Compact aluminum profile of 20.5mm in diameter (with lens).
- Ideal for suspended lights.
- Custom length by sections of 2 to 240 inches (6m).
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.

### Options



### LED strip compatibility

Compatible with LED strips up to **12mm** wide.























- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




# 6500 Profile

Components and accessories


# 6000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>6500 Profile <b>6500</b> (LM22800-01)</p>	 <p>6500 Clear <b>6261</b> (LM22810-01)</p>	 <p>6500 endcap, Alu <b>6270</b> (LM22810-11 WITHOUT HOLE)</p>	 <p>Phantom <b>1290</b> (LM22310)</p>	 <p>Horz joiner straight <b>1325</b> (LM22335-01)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>6500 Profile Black <b>6501</b> (LM22800-02)</p>	 <p>6500 Optiflex <b>6262</b> (LM22810-03)</p>	 <p>6500 endcap, black <b>6271</b> (LM22810-15 WITHOUT HOLE)</p>	 <p>2 magnet kit <b>1316</b> (LM22330)</p>	 <p>Horz joiner 45° corner <b>1328</b> (LM22335-07)</p>	
 <p>6500 Opal <b>6263</b> (LM22810-05)</p>	 <p>Susp. Kwik-Gripper 1/4"-20NC <b>1497</b> (LM22335-31)</p>	 <p>Susp. Kwik-Gripper M10 X 1.0 <b>1493</b> (LM22335-11)</p>	 <p>Horz joiner 90° corner <b>1326</b> (LM22335-03)</p>		
			 <p>Insert bracket M10 X 1.0 <b>1494</b> (LM22335-15)</p>	 <p>Vert joiner 90° corner <b>1327</b> (LM22335-05)</p>	
			 <p>Insert bracket 3/8"-16NC <b>1495</b> (LM22335-21)</p>	 <p>Threaded tube M10 X 1.0 <b>1511</b> (LM22335-40)</p>	
			 <p>Insert bracket 1/4"-20NC <b>1496</b> (LM22335-25)</p>	 <p>Threaded tube 3/8"-16NC <b>1512</b> (LM22335-41)</p>	
			 <p>Spring bracket <b>1570</b> (LM22336)</p>	 <p>Threaded tube 1/4"-20NC <b>1513</b> (LM22335-42)</p>	




# 7400 (7420) Profile

7400 (LM22820-01)

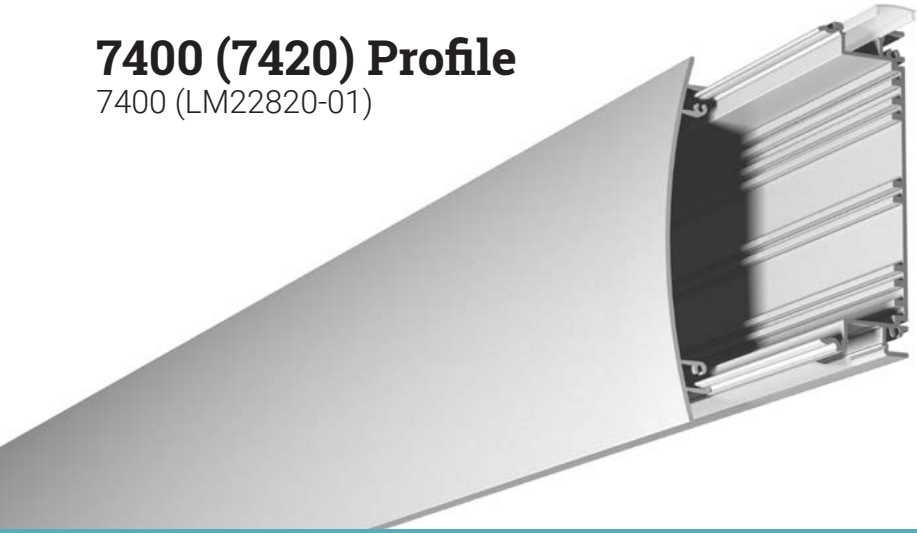

## 7000 Series

Dimensional drawing



Make **custom slightly rounded wall luminaires** with our 7420 faceplate for profile 7400. Profile 7400 offers several possibilities of lighting and accepts most LED strips and lenses of the 1000 Series. The bright strips pointing up and down allow you to vary the intensity of lighting, color or even create different desired effects. You can design both horizontal and vertical 20 foot long luminaires that can be connected to a conventional electrical junction box.

### Features

- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less in top and bottom insert.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.


### Options



### LED strip compatibility

The top and bottom inserts are compatible with LED strips up to **14mm** wide.



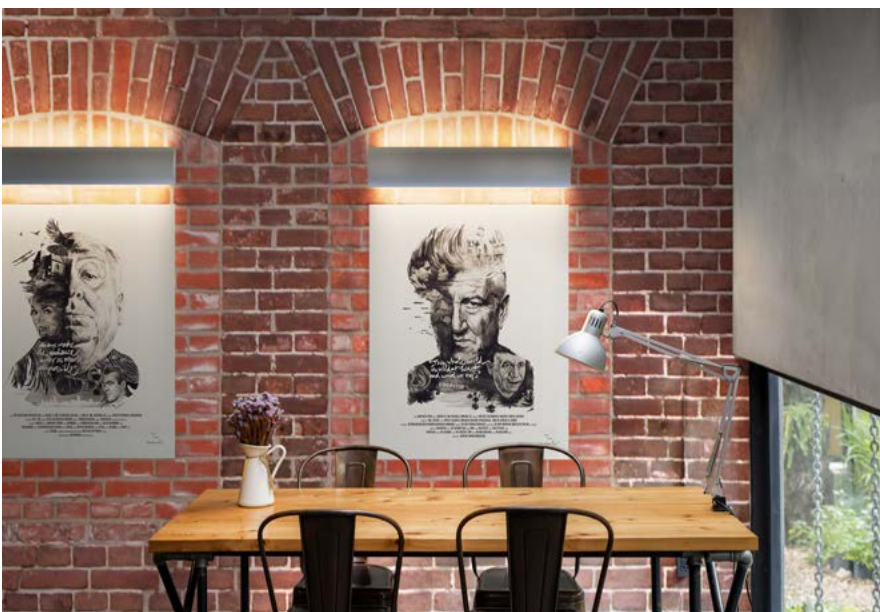




- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)




# 7400 Profile

Components and accessories


# 7000 Series

PROFILE	FINISH	LENSES	ENDCAPS	LENGTH
 <p>7400 Profile <b>7400</b> (LM22820-01)</p>	 <p>Round cover alu 7420 <b>7420</b> (LM22820-11)</p>	 <p>Standard, Transparente <b>1269</b> (LM22298)</p>  <p>Standard, Spread <b>1265</b> (LM22294)</p>  <p>Standard, Optiflex <b>1261</b> (LM22290)</p>  <p>Standard, Opal <b>1263</b> (LM22292)</p>	 <p>Endcap alu 7420 <b>7470</b> (LM22820-51)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>




# 7400 (7450) Profile

7400 (LM22820-01)

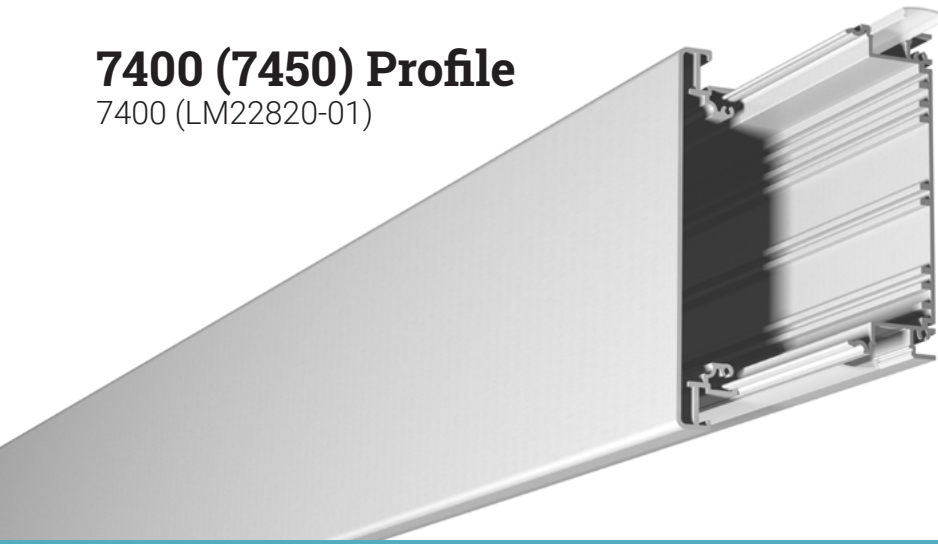

## 7000 Series

Dimensional drawing



Make **flat wall fixtures to create beautiful customized nameplates** with our 7450 finish for 7400 profile. It accepts most LED strips and lenses of the 1000 Series. The bright strips pointing up and down allow you to vary the intensity of lighting, color or even create different desired effects. You can design both horizontal and vertical 20 foot long luminaires that can be connected to a conventional electrical junction box.

\* See some illustrated examples.

### Features

- Designed to create custom nameplates of all kinds.
- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less in top and bottom insert.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.

### Options



### LED strip compatibility

The top and bottom inserts are compatible with LED strips up to **14mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)













# 7450 Profile

Components and accessories

# 7000 Series

PROFILE	FINISH	LENSES	ENDCAPS	LENGTH
 <p>7400 Profile <b>7400</b> (LM22820-01)</p>	 <p>Flat cover alu 7450 <b>7450</b> (LM22820-15)</p>	 <p>Standard, Transparente <b>1269</b> (LM22298)</p>  <p>Standard, Spread <b>1265</b> (LM22294)</p>  <p>Standard, Optiflex <b>1261</b> (LM22290)</p>  <p>Standard, Opal <b>1263</b> (LM22292)</p>	 <p>Endcap alu 7450 <b>7471</b> (LM22820-55)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>



## 7650 Profile

7630 (LM22840-21)



## 7000 Series

Dimensional drawing



Create beautiful mural or suspended light fixtures using our acrylic tubes, to a maximum length of 12 feet. The 7650 profile offers several possibilities of lighting and accepts most LED strips **that can be applied to one of the 3 surfaces of the 1900 profile** created for that purpose, allowing you to vary the intensity and color of the lighting. Whether horizontal or vertical, the mural luminaires can be installed onto a conventional electrical junction box. It has a unique mounting canopy that can accommodate the required transformer. Due to the large diameter of the opal acrylic tube, the LED hot spots are invisible\*.

### Features

- Can be installed in 12 foot lengths.
- Custom length by sections of 6 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED strip or less on 3 sides.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Designed to give a uniform light without hot spots\* with a strip of 120 LEDs per meter or more.


### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide\* on the central surface and up to **10mm\*** on the side surfaces.




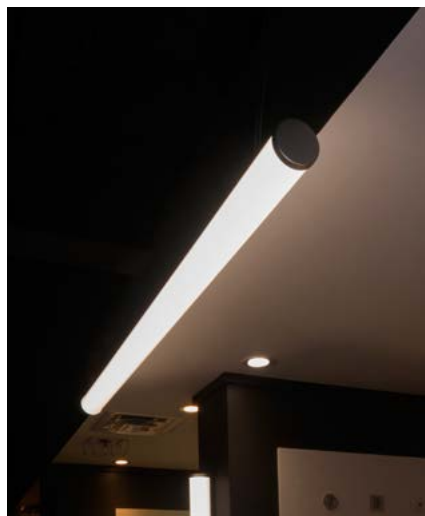










- (\* and \*) B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- (\* and \*) B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- (\* and \*) B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- (\*) B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)




# 7650 Profile

Components and accessories

# 7000 Series

PROFILE / LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>7650 Profile <b>7630</b> (LM22840-21)</p>	 <p>7650 Aluminum endcaps <b>7670</b> (LM22840-51)</p>	 <p>Aluminum canopy <b>7620</b> (LM22840-11)</p>	<p>Custom length by sections of 6 to 144 inches (3.6 m).</p>
	 <p>7650 Brushed nickel endcaps <b>7671</b> (LM22840-52)</p>	 <p>Brushed nickel canopy <b>7621</b> (LM22840-12)</p>	
		 <p>2 magnet kit <b>1316</b> (LM22330)</p>	
		 <p>Susp. Kwik-Gripper 1/4"-20NC <b>1497</b> (LM22335-31)</p>	
		 <p>Susp. Kwik-Gripper M10 X 1.0 <b>1493</b> (LM22335-11)</p>	
		 <p>Insert bracket M10 X 1.0 <b>1494</b> (LM22335-15)</p>	
		 <p>Insert bracket 3/8"-16NC <b>1495</b> (LM22335-21)</p>	
		 <p>Insert bracket 1/4"-20NC <b>1496</b> (LM22335-25)</p>	
		 <p>Threaded tube M10 X 1.0 <b>1511</b> (LM22335-40)</p>	
		 <p>Threaded tube 3/8"-16NC <b>1512</b> (LM22335-41)</p>	
		 <p>Threaded tube 1/4"-20NC <b>1513</b> (LM22335-42)</p>	




# 7800 Profile (POLETRUSS)

7800 (LM22850-01)



# 7000 Series

Dimensional drawing



Illuminate the inside of your closet to see your clothes and accessories! The 7800 profile is our most robust closet pole and offers **3 possibilities for lighting your clothes** and your entire wardrobe. This rod accepts most LED strips and the 1000 and 4000 series lenses. You can even add a touch of woodwork in order to give it a classy appearance\*.

\* See examples below.

## Features

- Standard diameter for wardrobe rods (requires our specific installation parts).
- Compatible with the 1000 and the 4000 series lenses.
- Can be installed in length of 10 feet without additional support.
- Custom length by sections of up to 96 inches (2.44m).
- Application guide for 10mm (3/8-inch) LED strip or less in the bottom insert.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Compatible with several installation accessories.
- Designed to meet North-American woodworking standards.

## Options





## LED strip compatibility

The bottom insert is compatible with LED strips up to 14mm wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)

Front and rear inserts are compatible with LED strips up to 8mm wide and our wooden inserts.



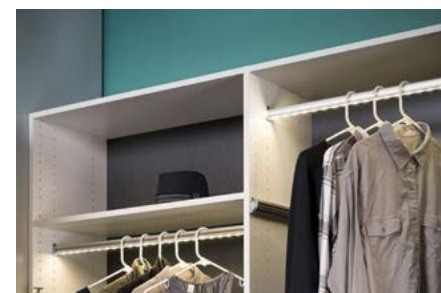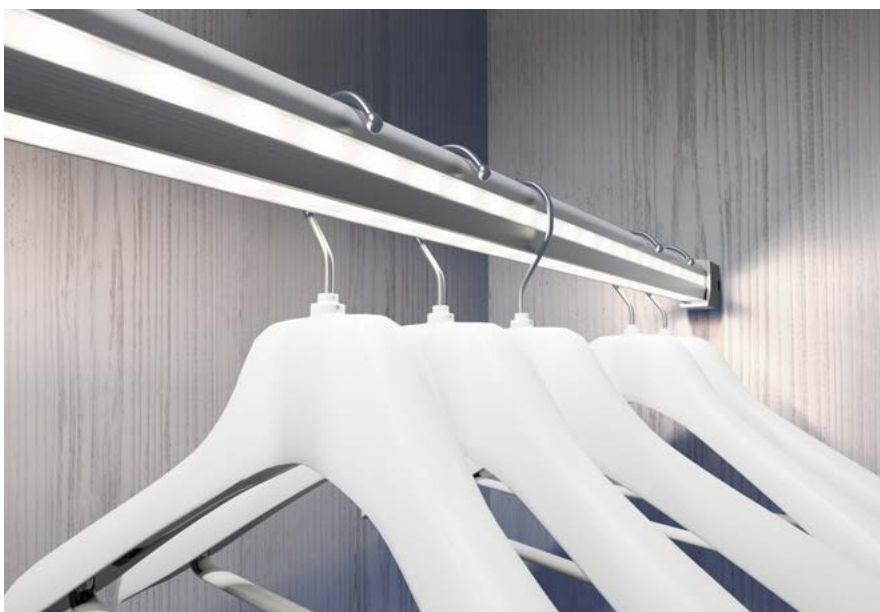







- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- SIDE WOOD YELLOW BIRCH
- SIDE WOOD OAK




# 7800 Profile

Components and accessories

# 7000 Series

PROFILE	BOTTOM LENSES	SIDE LENSES	ENDCAPS / BRACKETS	LENGTH
 <p>7800 Profile 7800 (LM22850-01)</p>	 <p>Standard, Clear (bottom) 1269 (LM22298)</p>	 <p>4000 Clear (side) 4032 (LM22484-3)</p>	 <p>Ens. support / endcaps 7800 7840 (LM22850-11)</p>	<p>Custom length by sections of 6 to 96 inches (2.44m).</p>
	 <p>Standard, Optiflex (bottom) 1261 (LM22290)</p>	 <p>4000 Optiflex (side) 4034 (LM22484-5)</p>		
	 <p>Standard, Opal (bottom) 1263 (LM22292)</p>	 <p>4000 Opal (side) 4030 (LM22484-1)</p>		
		 <p>Side wood yellow birch 9887 (LM22960-87)</p>		
		 <p>Side wood oak 9889 (LM22960-89)</p>		






## 7850 Profile

7850 (LM22850-20)



## 7000 Series

Dimensional drawing



Illuminate the inside of your closet to see your clothes and accessories! Profile number 7850 is a sturdy rod for wardrobes, **offering lighting directed onto your clothes and on the hangers.** This series accepts most LED strips as well as the 1000 Series lenses.

### Features

- Standard diameter for wardrobe rods (requires our specific installation parts).
- Compatible with the 1000 Series lenses.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Compatible with several installation accessories.

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.







- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# 7850 Profile

Components and accessories

# 7000 Series

PROFILE	LENSES	ENDCAPS/ BRACKETS	LENGTH
 <p>7850 Profile 7850 (LM22850-20)</p>	 <p>Standard, Clear 1269 (LM22298)</p>  <p>Standard, Spread 1265 (LM22294)</p>  <p>Standard, Optiflex 1261 (LM22290)</p>  <p>Standard, Opal 1263 (LM22292)</p>	 <p>Ens. supp. tringle standard 7855 (LM22850-30)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
<p><b>7850</b></p> <p>PROFILE</p>	<p>LENS</p>	<p>ENDCAPS / BRACKETS</p>	<p>LENGTH</p>


# 7900 (7920) Profile

7900 (LM22260)



## 7000 Series

Dimensional drawing




Here is **the most versatile light canopy** on the market! The 7900 suits your needs. You can select the desired length (up to 20 linear feet ) as well as the drilling position of the junction box.

### Options




### Features

- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Conceived to create various custom canopies.

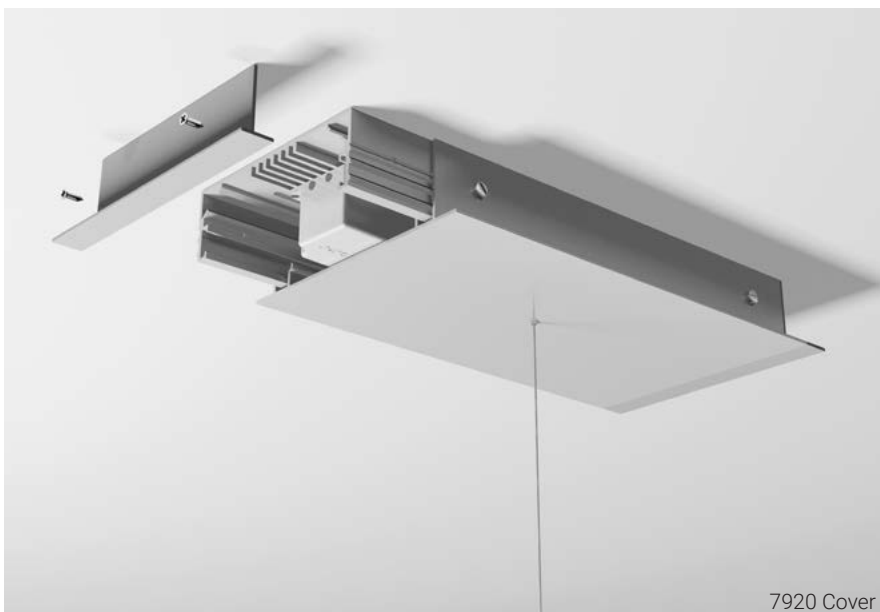

7920 Cover

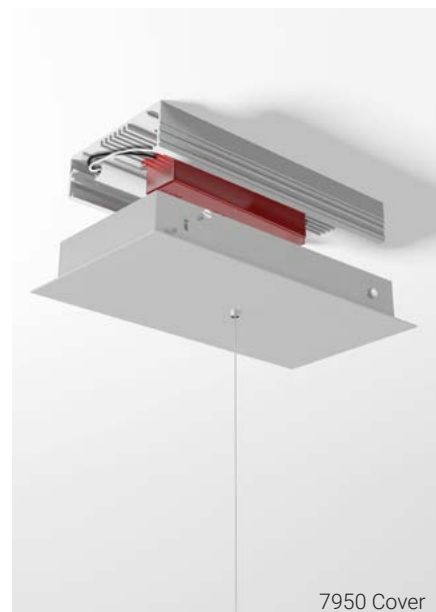

7950 Cover

# 7900 Profile

Components and accessories

## 7000 Series

### PROFILE



7900 Profile  
**7900** (LM22260)

### COVER



Face Plate (Custom)  
**7920** (LM22260-20)


### ENDCAPS



Standard 7900 Alu  
**7905** (LM22260-25)

### LENGTH

Custom length by sections of 2 to 240 inches (6m).




OR



Ceiling canopy  
**7950** (LM22840-50)


# 8900 Profile (KNIFE EDGE)

8900 (LM22990-02)

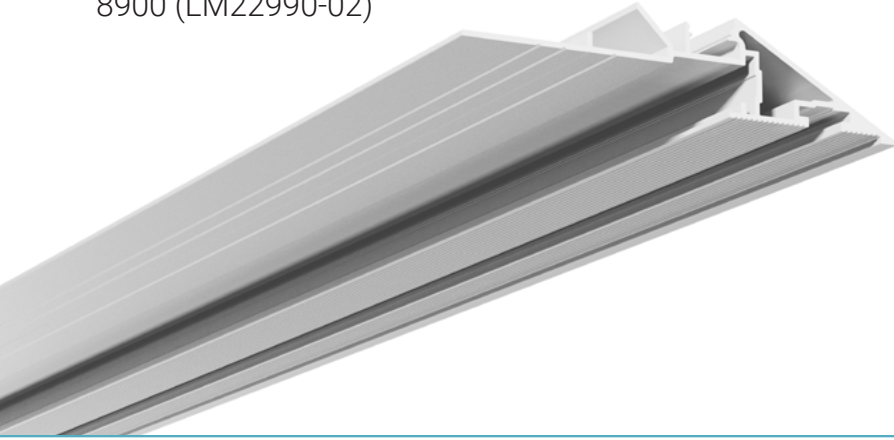

## 8000 Series

Dimensional drawing

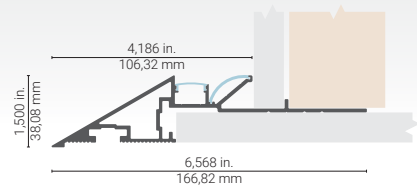

An architectural **"Knife Edge"** profile, **ideal for creating cove and drop ceilings!** The 8900 is a simple and innovative profile for ceiling design without requiring bulky and hard-to-build wooden structures. In a seamless and easy installation, the profile is a direct fit for standard 5/8-inch drywall plasterboard, and will also accommodate 1/2-inch boards with 1/8" shims installed onsite. Its compact and sleek finish will create the Wow you're looking for. The profile can be used with or without lighting. Two channels under different angles allow you to incorporate the LED strips of your choice, to wash the wall and ceiling above, project light toward the center of the room, or both. The channels accept most 1000 and 2000 Series lenses, allowing you to fine tune lighting effects to perfection.

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)











# 8900 Profile (KNIFE EDGE)

Components and accessories

## 8000 Series

PROFILE	UP LENSES	AREA LIGHT LENSES	ACCESSORIES	LENGTH
 <p>8900 Profile <b>8900</b> (LM22990-02)</p>	 <p>1000 Standard, Clear <b>1269</b> (LM22298)</p>	 <p>2000 Round, Clear <b>2037</b> (LM22368)</p>	 <p>8900 Horiz. joiner straight (1324) <b>1324</b> (LM22335-02)</p>	<p>Custom length by sections of 6 to 120 inches (3m).</p>
 <p>1000 Standard, Optiflex <b>1261</b> (LM22290)</p>	 <p>2000 Round, Optiflex <b>2034</b> (LM22364)</p>	 <p>8900 Horiz. joiner 45° corner <b>1329</b> (LM22335-08)</p>		
 <p>1000 Standard, Opal <b>1263</b> (LM22292)</p>	 <p>2000 Round, Opal <b>2030</b> (LM22360)</p>	 <p>Horiz. joiner 90° corner <b>1337</b> (LM22335-04)</p>		
		 <p>Vert. joiner 90° corner <b>1338</b> (LM22335-09)</p>		




# 9200 Profile (LUXSTRUT)

9200 (LM22950-10)



# 9000 Series

Dimensional drawing




This LED profile is easy to install and ideal for **residential, commercial and industrial projects**. Built in 6063 T-5 aluminum, our DEL extrusion can be installed in **dry or humid locations**. It can also be painted to match your decor. Available in lengths of 20 feet, you can create the desired effect, even in larger spaces and heights. **This profile can be surface mounted.**

## Features

- Designed to give a uniform light without hot spots with an opal lens and a strip of 72 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- 3 application guides for 10mm (3/8-inch) or narrower LED strips.
- Possibility to install 2 strips of 14mm for even more power.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.
- Suitable for outdoor installation.
- Has 3 position slots for the LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

## Options



## LED strip compatibility

Compatible with LED strips up to **33mm** wide.










- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips



# 9200 Profile (LUXSTRUT)

Components and accessories

## 9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9200 Profile <b>9200</b> (LM22950-10)</p>	 <p>9000 Clear <b>9547</b> (LM22960-7)</p>	 <p>9200-9400 Alu <b>9270</b> (LM22970-11)</p>	 <p>Surface 9000 <b>9571</b> (LM22980-1)</p>	 <p>Rail Insert 1,4 in. (37mm) <b>9000</b> (LM22954-99)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>9200 Profile Black <b>9512</b> (LM22950-2)</p>	 <p>9000 Optiflex <b>9541</b> (LM22960-1)</p>	 <p>9200-9400 Alu, Black <b>9272</b> (LM22970-15)</p>			
	 <p>9000 Opal <b>9543</b> (LM22960-3)</p>				




## 9400 Profile

9400 (LM22950-30)



## 9000 Series

Dimensional drawing



This LED profile is easy to install and ideal for **residential, commercial and industrial projects**. Great in open or high spaces, this profile can be installed on surfaces or suspended. It is a profile designed to ensure that the points of the LED source are not visible\*, offering linear lighting that's soft and uniform. All in one! A great design and versatility combined!

### Features

- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- 3 application guides for 10mm (3/8-inch) or narrower LED strips.
- Possibility to install 2 IP22 strips of 14mm for even more power.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation. Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (over 40 options).
- Suitable for outdoor installation.
- Has 3 position slots for the LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

### Options



### LED strip compatibility

Compatible with LED strips up to **33mm** wide.



























- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips




# 9400 Profile

Components and accessories

# 9000 Series


PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9400 Profile <b>9400</b> (LM22950-30)</p>	 <p>9000 Clear <b>9547</b> (LM22960-7)</p>	 <p>9200-9400 Alu <b>9270</b> (LM22970-11)</p>	 <p>Surface 9000 <b>9571</b> (LM22980-1)</p>	 <p>Rail Insert 1.4 in. (37mm) <b>9000</b> (LM22954-99)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>9400 Profile Black <b>9410</b> (LM22950-35)</p>	 <p>9000 Optiflex <b>9541</b> (LM22960-1)</p>	 <p>9200-9400 Alu, Black <b>9272</b> (LM22970-15)</p>	 <p>Wall bracket <b>9486</b> (LM22980-41)</p>	 <p>Horz joiner straight <b>1325</b> (LM22335-01)</p>	
 <p>9000 Opal <b>9543</b> (LM22960-3)</p>	 <p>9000 Focus <b>9545</b> (LM22960-5)</p>		 <p>Signage swivel bracket <b>9492</b> (LM22980-61)</p>	 <p>Horz joiner 45° corner <b>1328</b> (LM22335-07)</p>	
			 <p>Swivel sign arm small 6 in. <b>9491</b> (LM22980-55)</p>	 <p>Horz joiner 90° corner <b>1326</b> (LM22335-03)</p>	
			 <p>Swivel sign arm large 18 in. <b>9490</b> (LM22980-51)</p>	 <p>Vert joiner 90° corner <b>1327</b> (LM22335-05)</p>	
			 <p>Susp. Kwik-Gripper 1/4"-20NC <b>1497</b> (LM22335-31)</p>		
			 <p>Susp. Kwik-Gripper M10 X 1.0 <b>1493</b> (LM22335-11)</p>		
			 <p>Insert bracket M10 X 1.0 <b>9999</b> (LM23000-01)</p>		
			 <p>Insert bracket 3/8"-16NC <b>9998</b> (LM23000-03)</p>		
			 <p>Insert bracket 1/4"-20NC <b>9997</b> (LM23000-05)</p>		
			 <p>Threaded tube M10 X 1.0 <b>1511</b> (LM22335-40)</p>		
			 <p>Threaded tube 3/8"-16NC <b>1512</b> (LM22335-41)</p>		
			 <p>Threaded tube 1/4"-20NC <b>1513</b> (LM22335-42)</p>		






## 9500 Profile

9500 (LM22950-40)

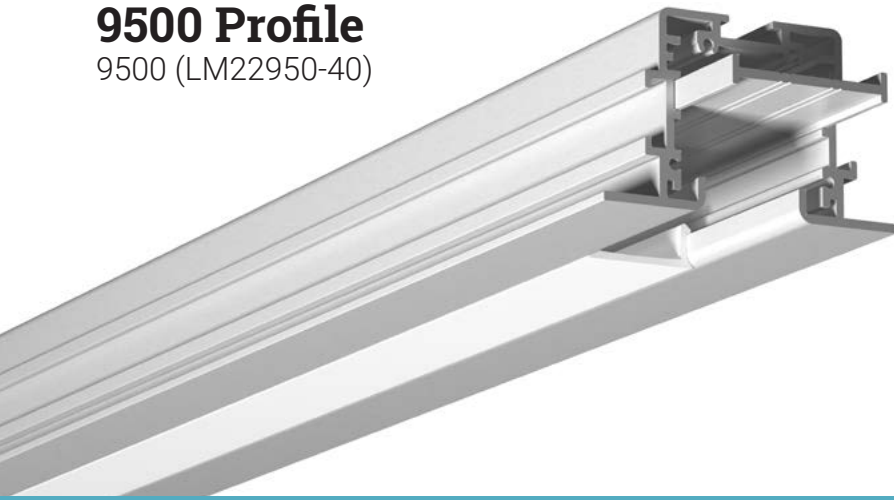

## 9000 Series

Dimensional drawing



This LED profile is easy to install and is **ideal for residential, commercial and industrial projects**. It can be installed in dry or humid locations. It can also be painted to match your décor. Available in lengths of 20 feet, you can create the desired effect, even in larger spaces and heights. This profile can be installed in **suspended or plasterboard ceilings and walls**.

### Features

- Designed to give a uniform light without hot spots with an opal lens and a strip of 72 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- 3 Application guide for 10mm (3/8-inch) LED strip or less.
- Possibility to install 2 strips of 14mm for even more power.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.
- Suitable for outdoor installation.
- Has 3 position slots for the LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

### Options



### LED strip compatibility

Compatible with LED strips up to **33mm** wide.



















- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips



# 9500 Profile


Components and accessories

# 9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9500 Profile <b>9500</b> (LM22950-40)</p>	 <p>Flat Clear <b>9557</b> (LM22960-71)</p>	 <p>Standard 9500 Alu <b>9570</b> (LM22970-41)</p>	 <p>Supp. susp. T-bar <b>9574</b> (LM22970-51)</p>	 <p>Rail Insert 1.4 in. (37mm) <b>9000</b> (LM22954-99)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>Flat Optiflex <b>9551</b> (LM22960-72)</p>	 <p>T-bar 9500 Alu <b>9572</b> (LM22970-47)</p>	 <p>Susp. Kwik-Gripper 1/4"-20NC <b>1497</b> (LM22335-31)</p>	 <p>Horz joiner straight <b>1325</b> (LM22335-01)</p>		
 <p>Flat Opal <b>9553</b> (LM22960-73)</p>	 <p>Susp. Kwik-Gripper M10 X 1.0 <b>1493</b> (LM22335-11)</p>	 <p>Horz joiner 45° corner <b>1328</b> (LM22335-07)</p>	 <p>Insert bracket M10 X 1.0 <b>1494</b> (LM22335-15)</p>		
 <p>Asymmetric <b>9549</b> (LM22960-9)</p>	 <p>Insert bracket 3/8"-16NC <b>1495</b> (LM22335-21)</p>	 <p>Horz joiner 90° corner <b>1326</b> (LM22335-03)</p>	 <p>Insert bracket 1/4"-20NC <b>1496</b> (LM22335-25)</p>		
			 <p>Vert joiner 90° corner <b>1327</b> (LM22335-05)</p>		
<p><b>9500</b></p> <p>PROFILE</p>	<p>LENS</p>	<p>ENDCAPS</p>	<p>BRACKETS</p>	<p>ACCESSORIES</p>	<p>LENGTH</p>


## 9800 Profile

9800 (LM22950-70)

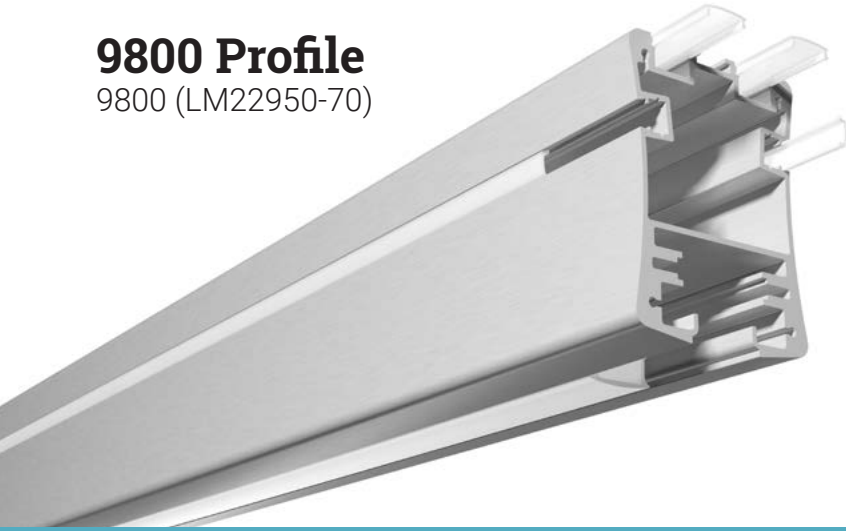

## 9000 Series

Dimensional drawing



This profile is **easy to install** and is ideal for residential, commercial and industrial projects. Its interior space allows it to **accommodate the required transformer** (TFT “Value Series”). It can be installed in dry or humid locations. It can also be painted to match your décor. Available in lengths of 20 feet, you can create the desired effect, even in larger spaces and heights. This profile is designed to be suspended and **offers lighting from all 4 sides**. The down lighting insert has a surface area of 33mm and 2 levels, allowing the use of one or more LED strips, and 9000 Series lenses. The two top inserts can each accommodate a 14mm or narrower LED strip, with 1000 Series lenses. The two lateral channels accept 10mm or narrower LED strips, as well as lenses from the 4000 series. You can also replace the side lighting with wood panel inserts, for a more “designer” look.

### Features

- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
  - Lighting down: With an opal or frosted lens and a strip of 72 LEDs or more per meter using the farthest insert slot.
  - Lighting from the top: with an opal lens and strip of 120 LEDs per meter or more.
  - Side lighting: With an opal lens and a strip of 180 LEDs per meter.
- Custom length by sections of 6 to 240 inches (6m).
- 3 Application guides for 10mm (3/8-inch) LED strip or less for the bottom channel.
- 1 application guide for 10mm (3/8 inch) LED strip or less for the top channels.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation. Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (more than 40 choices).
- Suitable for outdoor installation.
- Has 2 position slots for the bottom LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

### Options



### LED strip compatibility

(1) The bottom channel is compatible with LED strips up to **33mm** wide.

- (1) B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
- (1) B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
- (1) B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
- (1) B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
- (1) B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
- (1) B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
- (1) B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips

(2) The top channels are compatible with LED strips up to **14mm** wide.

(3) The side channels are compatible with LED strips up to **10mm** wide.





























- (2-3) B3528-xxV-60-8mm-4.8W (95 lm/ft)
- (2-3) B3528-xxV-120-8mm-9.6W (220 lm/ft)
- (2-3) B3528-xxV-120H-5MM-9.6W (220 lm/ft)
- (2-3) B3528-24V-180H-5MM-14.4W (288 lm/ft)
- (2) B3528-xxV-240-14mm-19.5W (410 lm/ft)
- (2-3) B5050-xxV-60-10mm-14.4W (407 lm/ft)
- (2-3) B5050-xxV-72-10mm-17.8W (488 lm/ft)
- (3) SIDE WOOD YELLOW BIRCH
- (3) SIDE WOOD OAK



# 9800 Profile

Components and accessories

# 9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH	
 <p>9800 Profile Alu <b>9800</b> (LM22950-70)</p>	 <p>9800 Clear (bottom) <b>9547</b> (LM22960-7)</p>	 <p>9800 Alu <b>9871</b> (LM22970-71)</p>	 <p>Susp. Kwik-Gripper 1/4"-20NC <b>1497</b> (LM22335-31)</p>	 <p>Rail Insert 1.4 in. (37mm) <b>9000</b> (LM22954-99)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>	
 <p>9800 Profile Black <b>9810</b> (LM22950-75)</p>	 <p>9800 Optiflex (bottom) <b>9541</b> (LM22960-1)</p>	 <p>9800 Black <b>9875</b> (LM22970-75)</p>	 <p>Susp. Kwik-Gripper M10 X 1.0 <b>1493</b> (LM22335-11)</p>	 <p>Insert bracket M10 X 1.0 <b>1494</b> (LM22335-15)</p>		
	 <p>9800 Opal (bottom) <b>9543</b> (LM22960-3)</p>		 <p>Insert bracket 3/8"-16NC <b>1495</b> (LM22335-21)</p>	 <p>Horz joiner straight <b>1325</b> (LM22335-01)</p>		
	 <p>Standard, Clear (top) <b>1269</b> (LM22298)</p>		 <p>Insert bracket 1/4"-20NC <b>1496</b> (LM22335-25)</p>	 <p>Horz joiner 45° corner <b>1328</b> (LM22335-07)</p>		
	 <p>Standard, Optiflex (top) <b>1261</b> (LM22290)</p>		 <p>Threaded tube M10 X 1.0 <b>1511</b> (LM22335-40)</p>	 <p>Horz joiner 90° corner <b>1326</b> (LM22335-03)</p>		
	 <p>Standard, Opal (top) <b>1263</b> (LM22292)</p>		 <p>Threaded tube 3/8"-16NC <b>1512</b> (LM22335-41)</p>	 <p>Vert joiner 90° corner <b>1327</b> (LM22335-05)</p>		
	 <p>4000 Clear (side) <b>4032</b> (LM22484-3)</p>		 <p>Threaded tube 1/4"-20NC <b>1513</b> (LM22335-42)</p>			
	 <p>4000 Optiflex (side) <b>4034</b> (LM22484-5)</p>					
	 <p>4000 Opal (side) <b>4030</b> (LM22484-1)</p>					
	 <p>Yellow birch wood panel (side) <b>9887</b> (LM22960-87)</p>					
	 <p>Oak wood panel (side) <b>9889</b> (LM22960-89)</p>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES		LENGTH

## Heat sinks and supports


Our heat sinks will increase the lifespan of LED strips in your installations up to 60% more. You can also use some of our heat sinks as brackets to fix LED strips and give them the orientation of your choice. They can even be suspended with our suspension gear.

## Heat Sinks



### Insert 1400-1500 Profile

1235 (LM22221-1)

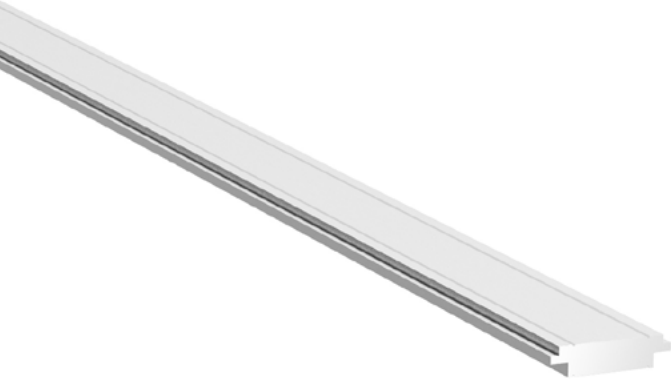


### Insert 5000 Profile

5000 (LM22221-2)



### Insert 9000 Profile

9000 (LM22990-01)

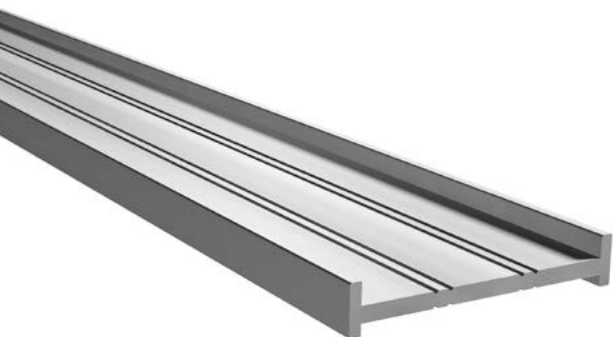

### Insert 9800 Profile

9899 (LM22990-99)

[AVAILABLE Q4 2016]


















# 1900 Profile

1900 (LM22280)







Components and accessories

## BRACKETS

-  Flat bracket  
**1280** (LM22306)
-  45° bracket  
**1283** (LM22307)
-  Swivel Bracket 180°  
**1286** (LM22308)
-  Phantom  
**1290** (LM22310)
-  2 magnet kit  
**1316** (LM22330)
-  Susp. Kwik-Gripper 1/4"-20NC  
**1497** (LM22335-31)
-  Insert bracket M10 X 1.0  
**1494** (LM22335-15)
-  Threaded tube M10 X 1.0  
**1511** (LM22335-40)
-  Susp. Kwik-Gripper M10 X 1.0  
**1493** (LM22335-11)
-  Insert bracket 3/8"-16NC  
**1495** (LM22335-21)
-  Threaded tube 3/8"-16NC  
**1512** (LM22335-41)
-  Insert bracket 1/4"-20NC  
**1496** (LM22335-25)
-  Threaded tube 1/4"-20NC  
**1513** (LM22335-42)

## ACCESSORIES

-  Horz joiner straight  
**1325** (LM22335-01)
  -  Horz joiner 45° corner  
**1328** (LM22335-07)
  -  Horz joiner 90° corner  
**1326** (LM22335-03)
  -  Vert joiner 90° corner  
**1327** (LM22335-05)
- 1900**

BRACKETS

ACCESSORIES

LENGTH
- PROFILE
BRACKETS
ACCESSORIES
LENGTH
















# 9499 Profile

0499 (LM40499)







Components and accessories

## BRACKETS

-  Flat bracket  
**1280** (LM22306)
-  45° bracket  
**1283** (LM22307)
-  Swivel Bracket 180°  
**1286** (LM22308)
-  2 magnet kit  
**1316** (LM22330)
-  Spring bracket  
**1570** (LM22336)
-  Wall support bracket silver  
**1318** (LM22325-01)
-  Wall support bracket black  
**1319** (LM22325-05)
-  Susp. Kwik-Gripper 1/4"-20NC  
**1497** (LM22335-31)
-  Insert bracket M10 X 1.0  
**1494** (LM22335-15)
-  Threaded tube M10 X 1.0  
**1511** (LM22335-40)
-  Susp. Kwik-Gripper M10 X 1.0  
**1493** (LM22335-11)
-  Insert bracket 3/8"-16NC  
**1495** (LM22335-21)
-  Threaded tube 3/8"-16NC  
**1512** (LM22335-41)
-  Insert bracket 1/4"-20NC  
**1496** (LM22335-25)
-  Threaded tube 1/4"-20NC  
**1513** (LM22335-42)

## ACCESSORIES

-  Horz joiner straight  
**1325** (LM22335-01)
  -  Horz joiner 45° corner  
**1328** (LM22335-07)
  -  Horz joiner 90° corner  
**1326** (LM22335-03)
  -  Vert joiner 90° corner  
**1327** (LM22335-05)
- 0499**

BRACKETS

ACCESSORIES

LENGTH
- PROFILE
BRACKETS
ACCESSORIES
LENGTH




# TIGA

0400 (LM40000)



## Wood Series

Dimensional drawing



Go for the warmth of the natural essence of wood. Liven up your spaces with our ecological lighting fixtures made of recycled wood from Quebec. Choose the **TIGA** and use the ceiling canopy of our 7900 series to give it style.

### Options



### Features

- Designed to give a uniform light without hot spots\* with an optiflex lens and a strip or PCB of 120 LEDs per meter or more.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- The insert is made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Available in natural or oiled finishes or with custom shades and types of wood.

### LED strip compatibility

Compatible with LED strips up to **14mm** wide.








- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# TIGA

## Components and accessories

# Wood Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>TIGA wood enclosure <b>0400</b> (LM40000)</p>	 <p>9000 Clear <b>9547</b> (LM22960-7)</p>	 <p>TIGA, Stainless Steel <b>0410</b> (LM40410)</p>	 <p>Wood Suspension 2-Kit <b>9009</b> (LM49009)</p>	 <p>Heatsink Insert, Alu <b>0499</b> (LM40499)</p>	<p>Custom length by sections of 2 to 144 inches (3.6m).</p>
	 <p>9000 Optiflex <b>9541</b> (LM22960-1)</p>				
	 <p>9000 Opal <b>9543</b> (LM22960-3)</p>				
<b>0400</b>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH


# TOOBYFOR

0401 (LM40100)



## Wood Series

Dimensional drawing



Go for the warmth of the natural essence of wood. Liven up your spaces with our ecological lighting fixtures made of recycled wood from Quebec. Choose the **TOOBYFOR** and use the ceiling canopy of our 7900 series to give it style.

### Options




### LED strip compatibility

Compatible with LED strips up to **14mm** wide.

### Features

- Designed to give a uniform light without hot spots\* with an optiflex lens and a strip or PCB of 120 LEDs per meter or more.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- The insert is made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Available in natural or oiled finishes or with custom shades and types of wood.



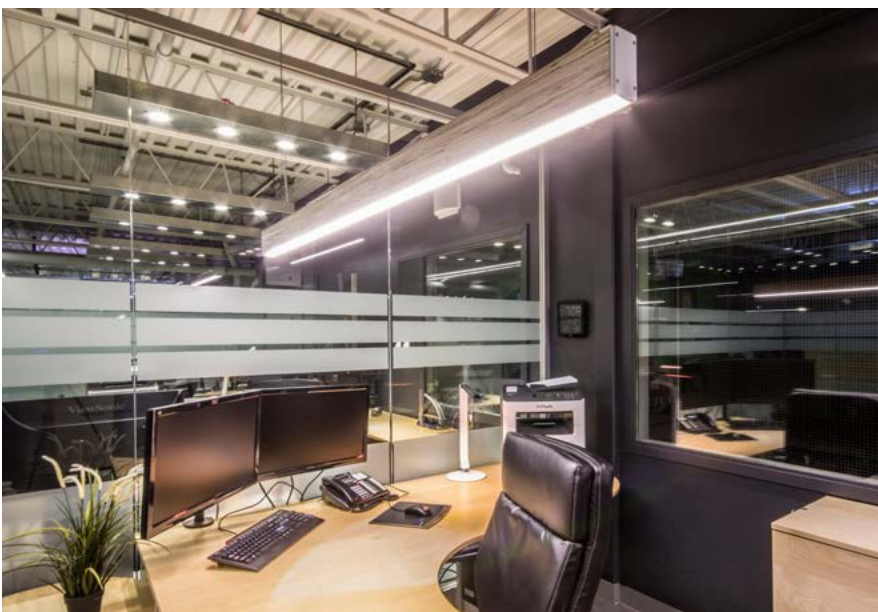




- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# TOOBYFOR

Components and accessories

## Wood Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>TOOBYFOR wood enclosure <b>0401</b> (LM40100)</p>	 <p>9000 Clear <b>9547</b> (LM22960-7)</p>	 <p>TOOBYFOR, Stainless Steel <b>0411</b> (LM40411)</p>	 <p>Wood Suspension 2-Kit <b>9009</b> (LM49009)</p>	 <p>Heatsink Insert, Alu <b>0499</b> (LM40499)</p>	<p>Custom length by sections of 2 to 144 inches (3.6m).</p>
	 <p>9000 Optiflex <b>9541</b> (LM22960-1)</p>				
	 <p>9000 Opal <b>9543</b> (LM22960-3)</p>				
<b>0401</b>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH




# TAO

0402 (LM40200)



## Wood Series

Dimensional drawing



Go for the warmth of the natural essence of wood. Liven up your spaces with our ecological lighting fixtures made of recycled wood from Quebec. Choose the **TAO** and use the ceiling canopy of our 7900 series to give it style.

### Options



### Features

- Designed to give a uniform light without hot spots\* with an optiflex lens and a strip or PCB of 120 LEDs per meter or more.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- The insert is made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Available in natural or oiled finishes or with custom shades and types of wood.

### LED strip compatibility

Compatible with LED strips up to **14mm** wide.








- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# TAO

## Components and accessories

# Wood Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>TAO wood enclosure <b>0402</b> (LM40200)</p>	 <p>9000 Clear <b>9547</b> (LM22960-7)</p>	 <p>TAO, Stainless Steel <b>0412</b> (LM40412)</p>	 <p>Wood Suspension 2-Kit <b>9009</b> (LM49009)</p>	 <p>Heatsink Insert, Alu <b>0499</b> (LM40499)</p>	<p>Custom length by sections of 2 to 144 inches (3.6m).</p>
	 <p>9000 Optiflex <b>9541</b> (LM22960-1)</p>				
	 <p>9000 Opal <b>9543</b> (LM22960-3)</p>				
<b>0402</b>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH


# SILO

0403 (LM40300)



## Wood Series

Dimensional drawing



Go for the warmth of the natural essence of wood. Liven up your spaces with our ecological lighting fixtures made of recycled wood from Quebec. Choose the **SILO** and use the ceiling canopy of our 7900 series to give it style.

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.

### Features

- Designed to give a uniform light without hot spots\* with an optiflex lens and a strip or PCB of 120 LEDs per meter or more.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- The insert is made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Available in natural or oiled finishes or with custom shades and types of wood.








- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# SILO

Components and accessories

## Wood Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>SILO wood enclosure <b>0403</b> (LM40300)</p>	 <p>9000 Clear <b>9547</b> (LM22960-7)</p>	 <p>SILO, Stainless Steel <b>0413</b> (LM40413)</p>	 <p>Wood Suspension 2-Kit <b>9009</b> (LM49009)</p>	 <p>Heatsink Insert, Alu <b>0499</b> (LM40499)</p>	<p>Custom length by sections of 2 to 144 inches (3.6m).</p>
	 <p>9000 Optiflex <b>9541</b> (LM22960-1)</p>				
	 <p>9000 Opal <b>9543</b> (LM22960-3)</p>				
<b>0403</b>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH


# PIKE

0404 (LM40400)



## Wood Series

Dimensional drawing



Go for the warmth of the natural essence of wood. Liven up your spaces with our ecological lighting fixtures made of recycled wood from Quebec. Choose the **PIKE** and use the ceiling canopy of our 7900 series to give it style.

### Options



### Features

- Designed to give a uniform light without hot spots\* with an optiflex lens and a strip or PCB of 120 LEDs per meter or more.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- The insert is made of ALCOA aluminum alloy 6063 T-5 increasing heat dissipation.
- Available in natural or oiled finishes or with custom shades and types of wood.

### LED strip compatibility

Compatible with LED strips up to **14mm** wide.








- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# PIKE

## Components and accessories

# Wood Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p><b>PIKE wood enclosure</b> <b>0404</b> (LM40400)</p>	 <p><b>9000 Clear</b> <b>9547</b> (LM22960-7)</p>	 <p><b>PIKE, Stainless Steel</b> <b>0414</b> (LM40414)</p>	 <p><b>Wood Suspension 2-Kit</b> <b>9009</b> (LM49009)</p>	 <p><b>Heatsink Insert, Alu</b> <b>0499</b> (LM40499)</p>	<p>Custom length by sections of 2 to 144 inches (3.6m).</p>
	 <p><b>9000 Optiflex</b> <b>9541</b> (LM22960-1)</p>				
	 <p><b>9000 Opal</b> <b>9543</b> (LM22960-3)</p>				
<b>0404</b>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH



# How to order SPL 1400

## Suspension Lighting

Client :	Project :		
Order # :	Qty :	Date :	

### HOW TO ORDER

Example of use **SPL1400** - **3** - **36** - **30K** - **OPAL** - **SUSP/C** - **120** - **BW**

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	VOLTAGE	ELECTRICAL WIRE
<b>SPL1400</b>	3 = ALU 5 = BLACK 0 = OTHER	12 = 12 INCH (5W) 20 = 20 INCH (8W) 24 = 24 INCH (10W) 36 = 36 INCH (16W) 48 = 48 INCH (20W) 0 = OTHER	30K = 3000K 41K = 4100K	OPTIFLEX OPAL SX = Square 3D Optiflex SL = Square 3D Opal RX = Round 3D Optiflex RL = Round 3D Opal	SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR


### Certifications




### Finishes



### Suspension




Rectangle 10 in  
Rectangle 14 in




\* Round  
\* Can be positioned at different locations

### Electrical Wire

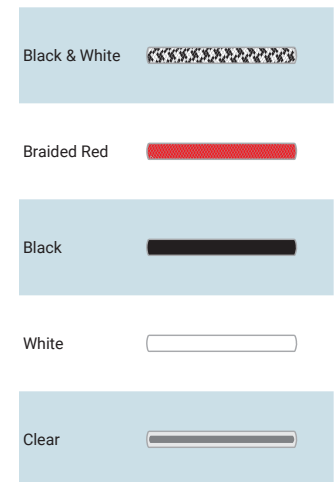

### Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Lenses



# How to order RCL 1500

## Recessed Lighting

Client :

Project :

Order # :

Qty :

Date :

### HOW TO ORDER

Example of use **RCL1500** - **3** - **36** - **30K** - **OPAL** - **120**

MODEL	FINISH	LENGTH	CCT	LENS	VOLTAGE
<b>RCL1500</b>	3 = ALU 5 = BLACK 0 = OTHER	12 = 12 inch (5W) 20 = 20 inch (8W) 24 = 24 inch (10W) 36 = 36 inch (16W) 48 = 48 inch (20W) 0 = OTHER	30K = 3000K 41K = 4100K	SPREAD CLEAR OPTIFLEX OPAL	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V

### Certifications




### Finishes




### Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Lenses

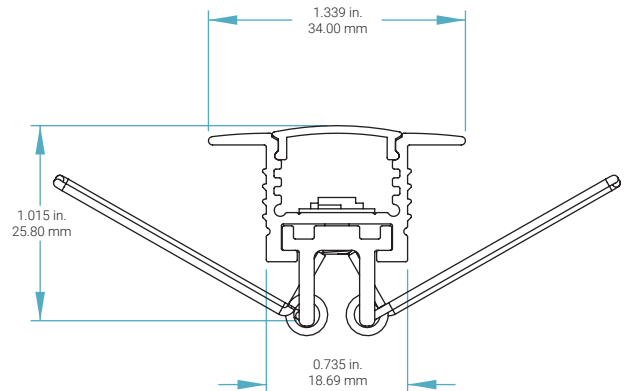

# How to order SPL 9200

## Suspension Lighting

Client : \_\_\_\_\_ Project : \_\_\_\_\_

Order # : \_\_\_\_\_ Qty : \_\_\_\_\_ Date : \_\_\_\_\_

### HOW TO ORDER

Example of use **MODEL** SPL9200 - **FINISH** 3 - **LENGTH** 36 - **CCT** 30K - **LENS** OPAL - **MOUNT** SUSP/C - **VOLTAGE** 120 - **ELECTRICAL WIRE** BW

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	VOLTAGE	ELECTRICAL WIRE
SPL9200	3 = ALU 5 = BLACK 0 = OTHER	12 = 12 INCH (5W) 20 = 20 INCH (8W) 24 = 24 INCH (10W) 36 = 36 INCH (16W) 48 = 48 INCH (20W) 0 = OTHER	30K = 3000K 41K = 4100K	OPTIFLEX OPAL	SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR


### Certifications




### Finishes



### Suspension

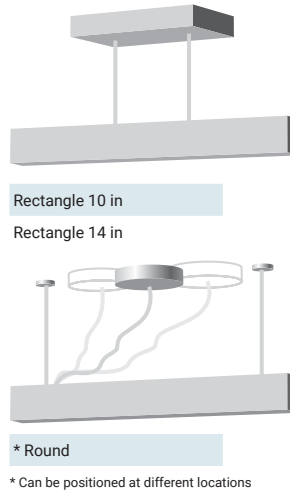


### Electrical Wire

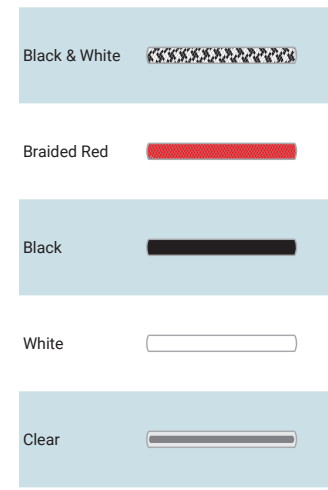

### Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Lenses



# How to order 9400

## Suspension & Wall-mounted Lighting

Client :	Project :
Order # :	Qty :
	Date :

### HOW TO ORDER

Example of use **9400** - **3** - **36** - **30K** - **OPAL** - **SG18** - **OUT** - **120**

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	USE	VOLTAGE
<b>9400</b>	3 = ALU 5 = BLACK 0 = OTHER	12 = 12 INCH (5W) 20 = 20 INCH (8W) 24 = 24 INCH (10W) 36 = 36 INCH (16W) 48 = 48 INCH (20W) 0 = OTHER	30K = 3000K 41K = 4100K	OPTIFLEX OPAL	SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy WS=Wall support SW=Swivel wall support SG6=Sign 6 in. SG18=Sign 18 in.	IN=INDOOR OUT=OUTDOOR	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V

### Certifications



### Finishes




### Suspension




### Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Lenses

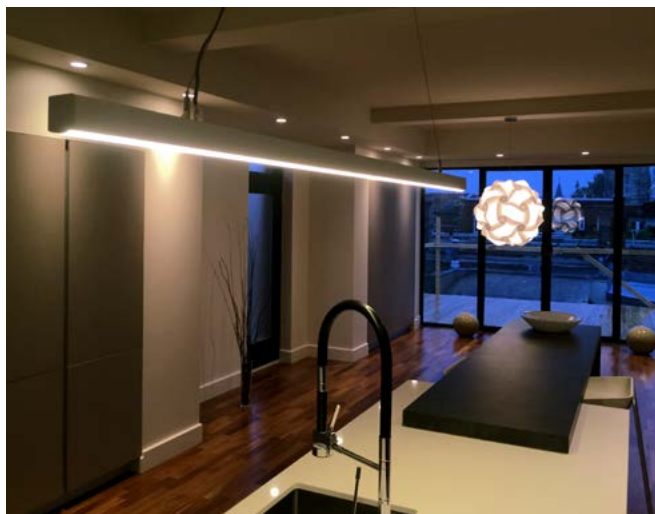

# How to order TruZZ

## Suspension Lighting

Client : \_\_\_\_\_ Project : \_\_\_\_\_

Order # : \_\_\_\_\_ Qty : \_\_\_\_\_ Date : \_\_\_\_\_

### HOW TO ORDER

Example of use **TRUZZ** - **3** - **30K** - **OPAL** - **SUSP/C** - **120** - **C**

MODEL	FINISH	CCT	LENS	MOUNT	VOLTAGE	ELECTRICAL WIRE
<b>TRUZZ</b>	3 = ALU 5 = BLACK 0 = OTHER	30K = 3000K 41K = 4100K	OPTIFLEX OPAL	SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR


### Certifications




### Finishes



### Suspension




### Electrical Wire

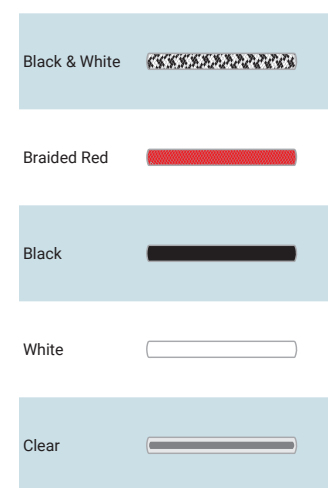


### Features

- Made in North America
- Anodized ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- View angle 90°
- Dimmable (with remote driver only - use Lutron CTCL-153P-Skylark or Diva)
- Suspension wire up to : 15' / 4.5 m



### Lenses





# How to order RCL 9500

## Recessed Lighting

Client :

Project :

Order # :

Qty :

Date :

### HOW TO ORDER

Example of use 


MODEL	FINISH	LENGTH	CCT	LENS	VOLTAGE
9500SC	3	36	30K	OPAL	120

MODEL	FINISH	LENGTH	CCT	LENS	VOLTAGE
9500SC = SUSPENDED CEILING	3 = ALU	12 = 12 INCH (5W)	30K = 3000K	OPTIFLEX	120 = 120VAC non-dimm.
9500RE = RECESSED (6-240 INCH)	5 = BLACK	20 = 20 INCH (8W)	41K = 4100K	OPAL	120D = 120VAC dimm.
	0 = OTHER	24 = 24 INCH (10W)			240 = 240VAC non-dimm.
		36 = 36 INCH (16W)			CV = Constant voltage, 12V or 24V
		48 = 48 INCH (20W)			
		0 = OTHER			

### Certifications




### Finishes

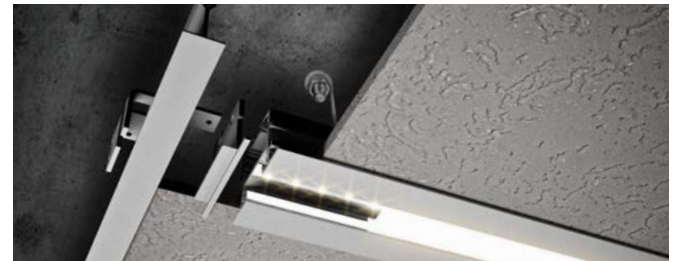


### Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Installation kit for suspended ceiling (using T-bars) and anti-seismic bracket with aircraft-grade cable
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Lenses

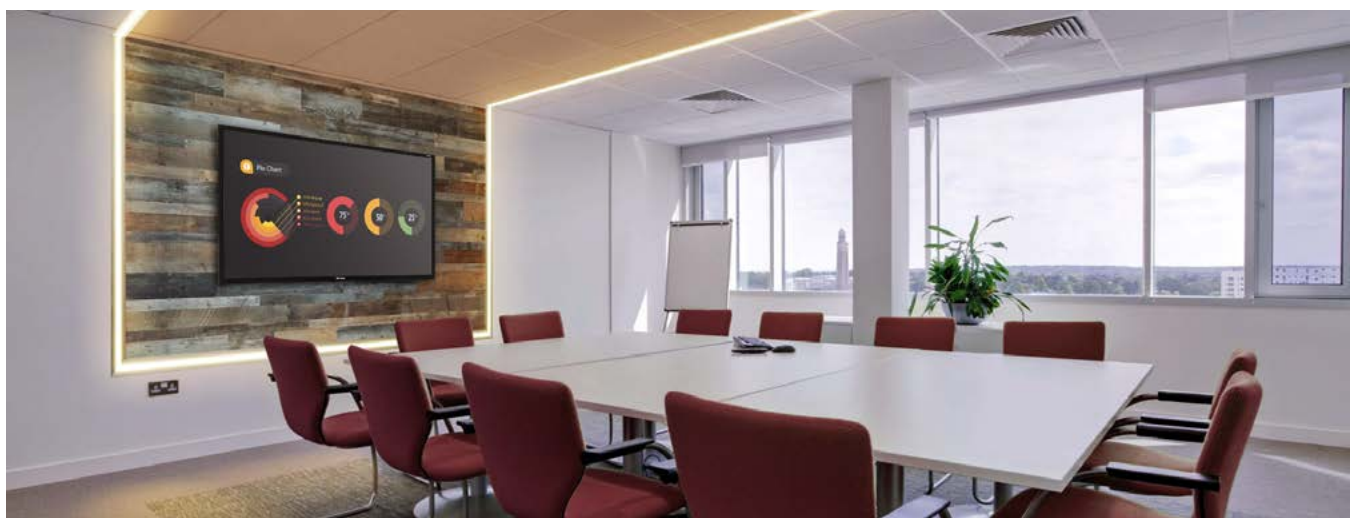



# How to order TUBE

## Suspended & Wall-Mounted Lighting

Client :	Project :	
Order # :	Qty :	Date :

### HOW TO ORDER

Example of use 

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	ENDCAP	VOLTAGE
SPL9200	3	36	30K	OPAL	SUSP/C	BN	120

MODEL	LENGTH	CCT	LENS	MOUNT	ENDCAP	VOLTAGE
<b>TUBE</b>			<b>OPAL</b>			
	12 = 12 INCH (5W) 20 = 20 INCH (8W) 24 = 24 INCH (10W) 36 = 36 INCH (16W) 48 = 48 INCH (20W) 0 = OTHER	30K = 3000K 41K = 4100K		SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy SUSP/V = Vertical susp. kit WL* = Low canopy WC* = Center canopy WH* = Higher canopy	ALU = Aluminum BN = Brushed nickel 0 = OTHER	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V

\*12-36 inch

### Certifications



### Endcaps




Aluminum


Stainless

### Features


- Made in North America
- Durable construction: Alcoa 6063T-5 aluminum, stainless steel, opal acrylic diffuser
- 600 lumens per foot (1960 lm/m)
- Easy installation
- Custom length available up to 12 feet long, with remote driver
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Mount

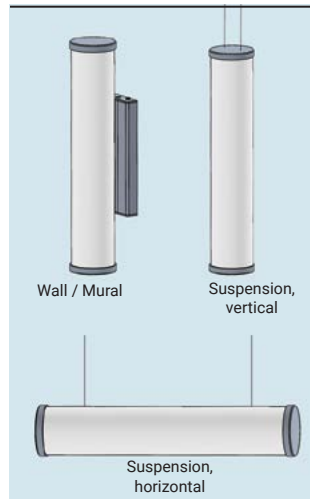

### Wall Options

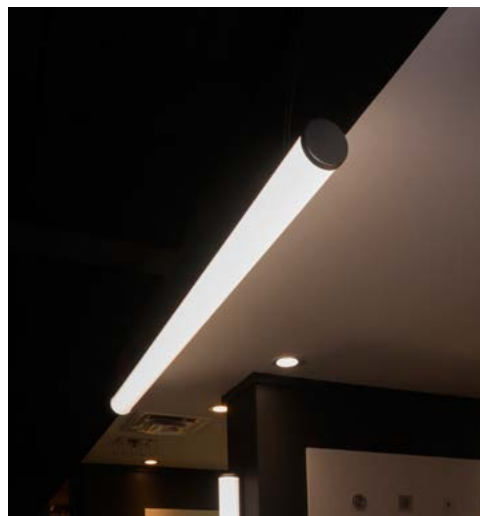

# How to order SERZO

## Suspension Lighting

Client : \_\_\_\_\_ Project : \_\_\_\_\_

Order # : \_\_\_\_\_ Qty : \_\_\_\_\_ Date : \_\_\_\_\_

### HOW TO ORDER

Example of use **MODEL** SERZO - **DIAMETER** 54 - **DIFFUSER** OPAL - **CCT** 30K - **FINISH** ALU - **POWER** 39 - **VOLTAGE** 120D - **ELECTRICAL WIRE** C

MODEL	DIAMETER	DIFFUSER	CCT	FINISH	POWER	VOLTAGE	ELECTRICAL WIRE
SERZO	36 = 36 INCH 54 = 54 INCH 72 = 72 INCH	OPAL	30K = 3000K 41K = 4100K	ALU = Aluminum WH = White CH = Charcoal	19.5 = 19.5W/m 39 = 39W/m (double row)	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm.	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR

CV = Constant voltage, 12V or 24V


### Certifications




### Finishes



### Central Canopy




12 in. rect. canopy  
Includes internal non-dimmable driver




External remote driver  
With dimmable remote driver only

### Electrical Wire

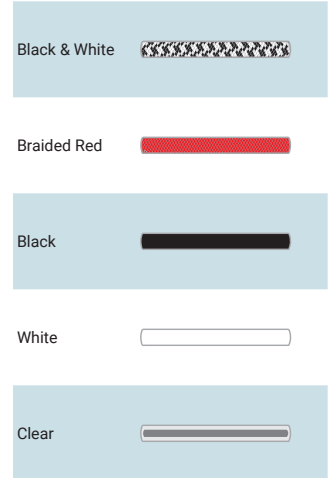

### Features

- Made in North America
- ALCOA 6063T-5 aluminium, stainless steel, opal acrylic diffuser-reflector
- Guideline for easy installation
- 360° lighting
- Includes canopy and 3x15 ft (4,5m) of braided stainless steel suspension cable
- Dimmable (with remote driver only - use Lutron CTCL-153P-Skylark or Diva)

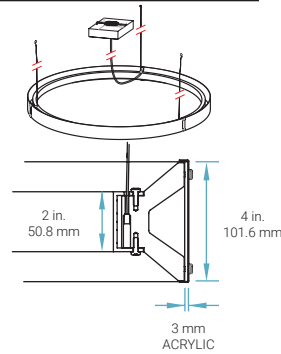

# How to order ABORA

## Suspension Lighting

Client : \_\_\_\_\_ Project : \_\_\_\_\_

Order # : \_\_\_\_\_ Qty : \_\_\_\_\_ Date : \_\_\_\_\_

### HOW TO ORDER

Example of use **ABORA** - **W** - **30K** - **R3** - **3W** - **120** - **R**

MODEL	FINISH	CCT	SUSPENSION KIT	POWER	VOLTAGE	ELECTRICAL WIRE
<b>ABORA</b>	W = WHITE B = BLACK O = OTHER	30K = 3000K 41K = 4100K	R1 = ROUND 1 FIXTURE SUSP = ROUND 1 FIXTURE R2 = ROUND 2 FIXTURES R3 = ROUND 3 FIXTURES S1 = SQUARE 1 FIXTURE S2 = SQUARE 2 FIXTURES S3 = SQUARE 3 FIXTURES	3W=3W 300LM 6W=6W 600LM	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm.	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR


### Certifications




### Finishes



### Suspension

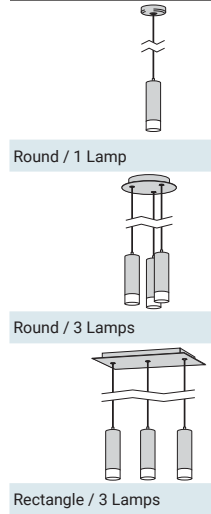


### Electrical Wire

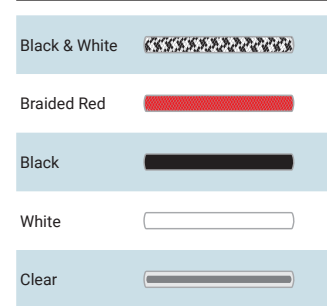


### Features

- Made in North America
- 6063-T5 Aluminum enclosure
- Uniform light distribution with frosted acrylic diffuser
- Power : 3/6 Watts
- Luminous Flux & Power : 300lumens (3W), 600 Lumens (6W)
- Dimmable (use electronic dimmer, e.g. Lutron DVELV-300P)

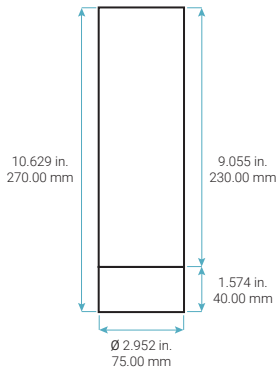

### Light Colour



# How to order Mural 7420

## Wall Lighting

Client :

Project :

Order # :

Qty :

Date :

### HOW TO ORDER

Example of use **MURAL7420** - **3** - **UP/DOWN** - **60** - **42K** - **OPTIFLEX** - **12W** - **120**

MODEL	FINISH	ORIENTATION	LENGTH	CCT	LENS	POWER	VOLTAGE
<b>MURAL7420</b>	3 = ALU 0 = OTHER	UP/DOWN UP DOWN	19 = 19 INCH 39 = 39 INCH 60 = 60 INCH 72 = 72 INCH 96 = 96 INCH 0 = OTHER	30K = 3000K 35K = 3500K 42K = 4200K 0 = OTHER	SPREAD CLEAR OPTIFLEX OPAL	6W = 5.85W/FOOT 12W = 11.7W/FOOT 0 = OTHER	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V



### Certifications



### Features

- Made in North America
- LED channel, finished in 6063 T-5 anodized aluminum, with endcap and installation on canopy. Other finishes available upon request.

### Lenses

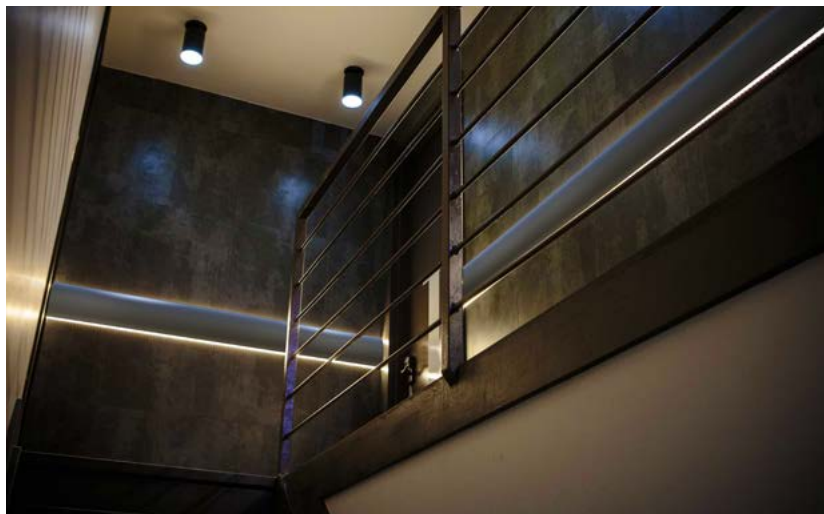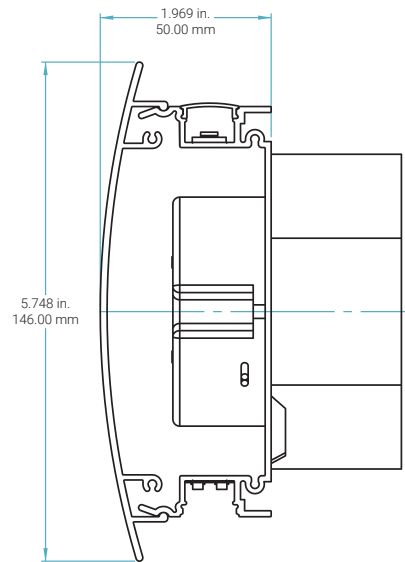

# How to order Sign 7450

## Wall Lighting & Signage

Client :	Project :	
Order # :	Qty :	Date :

### HOW TO ORDER

Example of use: MODEL SIGN7450 - FINISH 3 - ORIENTATION UP/DOWN - LENGTH 60 - CCT 42K - LENS OPTIFLEX - POWER 12W - CUSTOM SIGNAGE CD - VOLTAGE 120

MODEL	FINISH	ORIENTATION	LENGTH	CCT	LENS	POWER	CUSTOM SIGNAGE	VOLTAGE
SIGN7450	3 = ALU O = OTHER	UP/DOWN UP DOWN	19 = 19 INCH 39 = 39 INCH 60 = 60 INCH 72 = 72 INCH 96 = 96 INCH O = OTHER	30K = 3000K 35K = 3500K 42K = 4200K O = OTHER	SPREAD CLEAR OPTIFLEX OPAL	6W = 5.85W/FOOT 12W = 11.7W/FOOT O = OTHER	ND = NO SIGNAGE CD = CUSTOM SIGNAGE DESIGN* *Ask your sales rep.	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V


### Certifications



### Features

- Made in North America
- Two LED channels
- Finished in 6063 T-5 anodized aluminum, with endcap and installation on canopy. Other finishes available upon request.
- Possibility of CNC machining of front plate, engraving or printing, and backlighting through acrylic panel for custom signage.

### Lenses

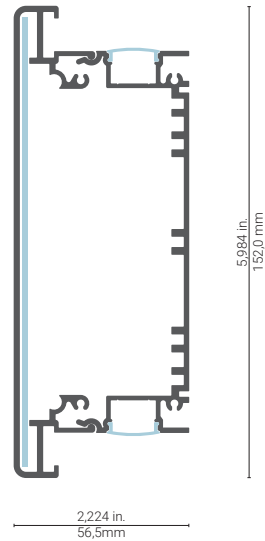

# How to order RONDO

## Suspension Lighting

Client :

Project :

Order # :

Qty :

Date :

## HOW TO ORDER

Example of use **RONDO** - **1** - **8** - **30K** - **R1** - **6W** - **120D** - **C**

MODEL	FINISH	LENGTH	CCT	SUSPENSION KIT	POWER	VOLTAGE	ELECTRICAL WIRE
<b>RONDO</b>	1 = OILED 2 = NATURAL 0 = OTHER	5 = 5 INCH 8 = 8 INCH	30K = 3000K 42K = 4200K	<b>R1</b> R1 = ROUND 1 FIXTURE	3W = 3W 300LM 6W = 6W 600LM	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm.	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR

## Certifications




## Finishes



Natural

Oiled


## Dimensions

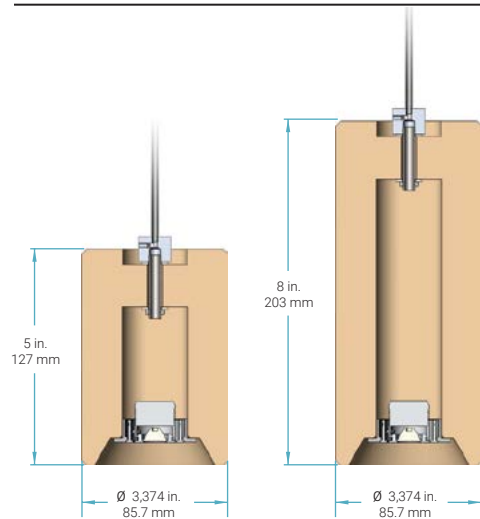


## Features

- Made in North America
- Ecological engineered hardwood enclosure
- Stainless steel components
- Driver included
- Dimmable lighting (6W model only - Use Lutron CTCL-153P-Skylark or Diva)
- Includes round 5 in. stainless steel canopy and 8 ft. of clear cable


## Light Colours









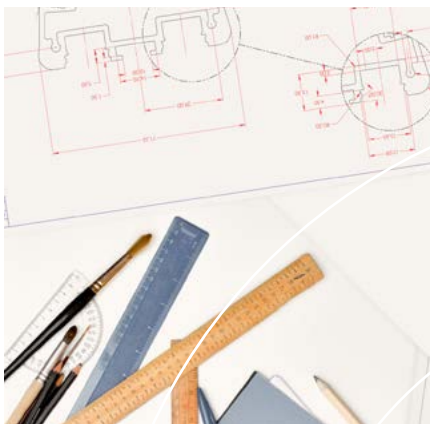

We create lighting to your specifications. Our profiles can be custom made, offering you infinite creative possibilities.

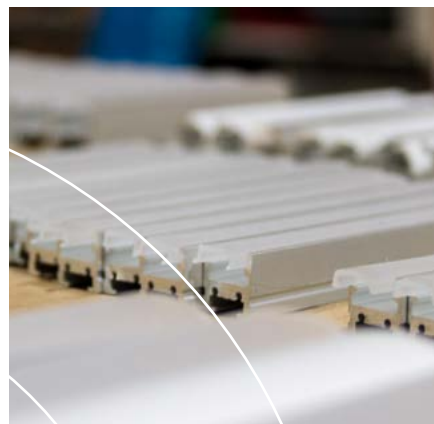

**100%  
CUSTOMIZED**

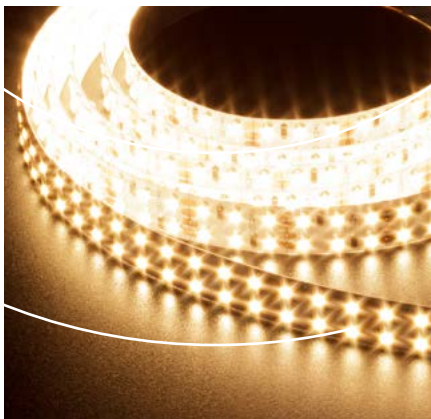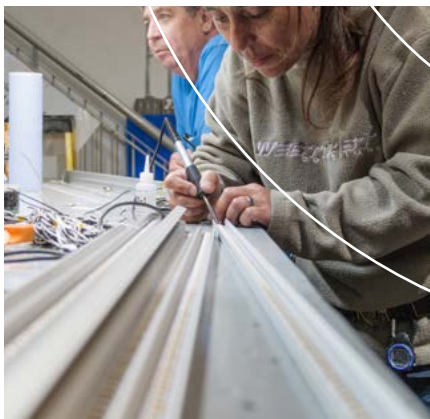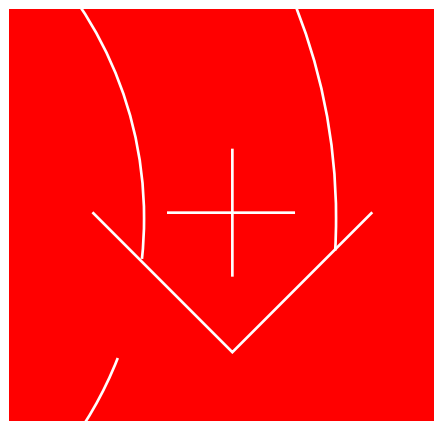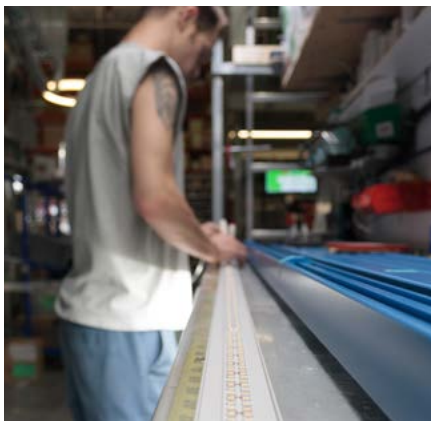

flexidel

LumenTruss is an official distributor of Flexidel LED products. Find us at your local dealer, visit [www.flexidel.com](http://www.flexidel.com), or write an e-mail to [info@flexidel.com](mailto:info@flexidel.com)

# LIGHTING UNDER CONTROL!

NEW **DIMMABLE** ELECTRONIC TRANSFORMERS



**30** YEARS OF LIGHTING SOLUTIONS



## New And Exclusive To TFT!

**TFT introduces its revolutionary dimmable electronic transformer** with constant voltage, used directly on standard 120VAC input, and compatible with most Triac low-voltage CFL/LED dimmers.

Also compatible with most LED recessed lights, LED strips and 12VDC-24VDC cabinet lights.

### Features

- 0-100% load
- LED lighting compatible
- Wide flicker-free dimming range
- Water resistant models IP20 or IP67
- Indoor or outdoor use
- Ventilated junction boxes adapted for each model
- Surge protected
- Meets international standards of safety in lighting
- Meets stringent environmental standards

**TFT**<sup>™</sup>  
**TRANSFOTEC INTERNATIONAL**  
[www.transfotec.com](http://www.transfotec.com)

**TFT TRANSFOTEC INC.**

6068 Boul Metropolitain E. • Montreal, Quebec • H1S 1A9  
F: 514-360-7245 • Toll free : 1-855-647-3484 • USA: 802-923-3796  
email: [info@transfotec.com](mailto:info@transfotec.com)





# Baganti



Silicone Edge Graphics  
Large Format Print



High-Power  
LED Bar Frames



LED Shutter-Light  
Frames



LED Edgelit  
Acrylic Frames



LED Module  
Frames

## Turnkey Display Solutions Large Format Printing



SHOWROOM  
5680 Pare St., Mount-Royal, QC, H4P 2M2



PHONE  
514-303-9488



WEBSITE  
baganti.com




Order your free  
SAMPLE TODAY!!

Pay only \$19.99 for shipping and handling.

## What's in the box:

High-end led profiles of series: **1100, 1200, 1300, 1400, 2000, 4400 & 4500.** All of our brackets and endcaps to fit your new LED profiles along with all five lenses (Focus, Clear, Spread, Opal and Optiflex). You will also receive the latest LumenTruss catalog.

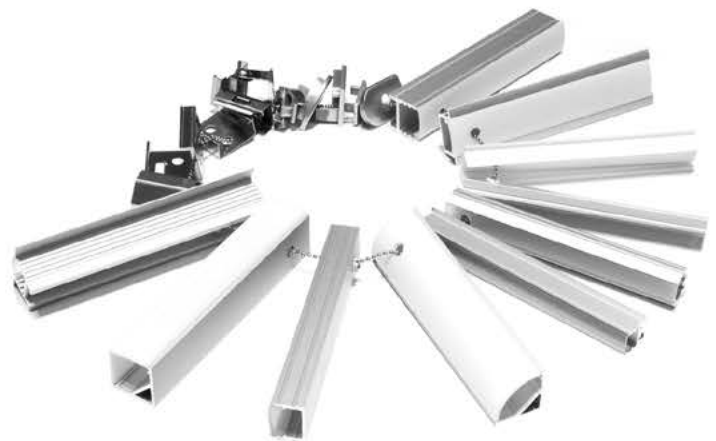

**LUMEN**  
Truss

**cUL** US  
E301099

**cUL** US  
E360437

**LUMENTRUS**

6068 Boul Metropolitan Est • Montreal, Quebec • H1S 1A9  
Toll free : 1-855-647-3484 • FAX : 1-514-903-0649  
email : [info@lumentruss.com](mailto:info@lumentruss.com)





LEDs  
TALK ABOUT  
YOUR  
PROJECTS





## CONTACT US

**ADDRESS**

6068 boul. Métropolitain Est  
Montréal (Québec) H1S 1A9  
Canada

**PHONE**

1.855.384.3384

**FAX**

1.514.903.0649

**EMAIL**

[info@lumentruss.com](mailto:info@lumentruss.com)



[www.lumentruss.com](http://www.lumentruss.com)

