


OMEGA

4" Recessed Downlight



Trims dimensions:

RA2 - SA2




3 3/4"
(95 mm)

RS2



3"
(76.5 mm)

RR2



3 1/2"
(89 mm)

KT0 - KT1 - KT2



3 1/8"
(80 mm)



The quality of light of this Series is comparable to that of a halogen lamp offering crisp, directional light which perfectly highlights surroundings. It offers a CRI of 90 and glare-control reflector design.

This small LED module provides higher lumen performance than an LED lamp and is very easy to install. Without the need of a housing, it is installed directly in the ceiling using torsion springs and most models are IC rated. The LED module is fitted with an external dimmable driver. Omega is also offering style, discretion and flexibility with a wide selection of interchangeable trims and accessories.

FEATURES

- Anti-glare reflector design UGR \leq 19
- Available in 6 W (IC rated) with three different beam angle options: 22°, 36° and 60°
- Reproduces the crisp white light of an MR16 halogen lamp
- 50 000 hours
- High CRI of 90
- Discreet look and sleek design
- Dimmable
- Designed to meet North American woodworking standards.







OMEGA TRIMLESS KIT - MODERN & STUNNING

AN INSTANT CLASSIC

The Omega trimless kit is our new favorite LED Recessed luminaire! Minimalist with the newest in technology. The kit is available in silver, white or black. One of the advantages is that it is designed to be plastered into ceilings to give a seamless appearance. A great choice to get a clean and modern look.

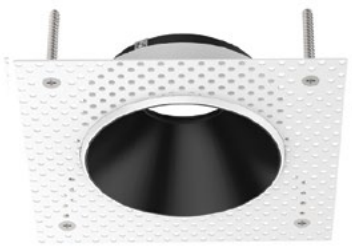

Kit Trimless Black

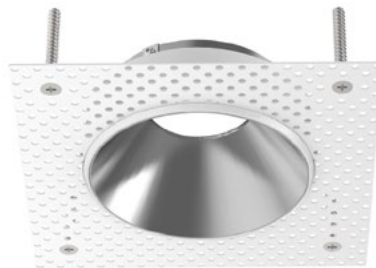

Kit Trimless Silver



Kit Trimless White

Recessed



OMEGA MODULES AND TRIMS DIMENSIONS

QUALITY CONSTRUCTION

The Omega Series is designed and manufactured using high quality materials.

EASE OF INSTALLATION

This LED downlight is easy to install with no need for a housing and it comes equipped with torsion springs.

VERSATILITY

With interchangeable trims and reflectors, this product can be adapted to all types of designs and applications.


PLEASING LIGHT

The Omega Series reproduces the crisp white look of a halogen MR16 lamp at a fraction of the energy cost

SUPERIOR PERFORMANCE

The Omega Series produces more light output than a regular LED MR16 or GU10 lamp.

RA2 - SA2




Translating center beam optic allows 0-25° vertical tilt, 355° horizontal rotation.




3 3/4" (95 mm)

RS2




3" (76.5 mm)

RR2



3 1/2" (89 mm)




























KT0 - KT1 - KT2



3 1/8" (80 mm)

Omega ordering sheet

Recessed downlight

TRIM	LUMINOSITY	COLOR TEMPERATURE	BEAM ANGLE	POWER SUPPLY	ACCESSORIES	QUANTITY
 <p>KIT0 - Kit trimless silver  3 1/8" (80 mm)</p>	<p>670 - 670 lm (6W) CRI 90+ </p> <p>900 - 900 lm (8W)* CRI 90+ </p> <p><i>*900 lm is not IC rated. May need insulated box (see accessories).</i></p>	<p>27 - 2700K  (in stock)</p> <p>30 - 3000K  (in stock)</p> <p>35 - 3500K  (in stock)</p> <p>40 - 4000K  (special order)*</p> <p><i>*Delivery times will be longer for special orders.</i></p>	<p>22 - 22 degrees </p> <p>36 - 36 degrees </p> <p>60 - 60 degrees </p>	<p>*Included</p> <p>B - ELV dimming 120V AC</p> <p>D - 0-10V dimming 120/277V AC</p>	 <p>PF - Plaster frame, ø3"-5.5" new construction</p>  <p>IC - IC Box**, ø3"-5.5" new construction **Use only with 900 lm</p>  <p>NO - No mounting accessories</p>	 <p>OMEGA</p>
 <p>KIT1 - Kit trimless black  3 1/8" (80 mm)</p>						
 <p>KIT2 - Kit trimless white  3 1/8" (80 mm)</p>						
 <p>RA2 - Round adjustable white  3 3/8" (95 mm)</p>						
 <p>SA2 - Square adjustable white  3 3/8" (95 mm)</p>						
 <p>RR2 - Round recessed white  3 1/2" (89 mm)</p>						
 <p>RS2 - Round shower white  3" (76.5 mm)</p>						
TRIM	LUMINOSITY	COLOR TEMPERATURE	BEAM ANGLE	POWER SUPPLY	ACCESSORIES	QUANTITY

Recessed