SFB-150

Double-Sided Light Box Frame With High Output LED Light Bars

Data Sheet

Dimensions, cross-section

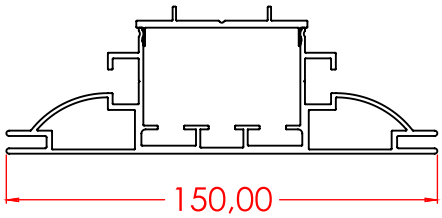

Note: all units are millimeters

Weight

XX Lbs/foot, XX kg/m

E479634

Description	The Profile SFB-150 is a double-sided light box that utilizes ultra-bright LED light bars, which attach to the light box extrusion with simple thumb screws and plug together to create bright, even lighting out both sides, doubling your marketing messages. Assembly is quick and easy and, because there are no bulky light panels, these light boxes break down and store in one small case, offering considerable savings on shipping.
Applications	Freestanding, wall mounted or suspended for retail environments, restaurants, museums, airports and trade shows.
Frame specifications	• Suitable for HO Power LED Modules • Ultra-bright LED lighting • Low power consumption • Virtually no heat • Single or Double sided back lit banner • SEGLED frame with mitered corners • 150mm wide anodized aluminium profile • Clear anodized finish
LED specifications	Single row • 23mm wide PCB • Natural white - 6500K • 5 HO LED per foot • 8.7W per foot • Voltage 24V DC • Lifetime 50 000 hours or Double your lumen • 2 x 23mm wide PCB • Natural white - 6500K • 10 HO LED per foot • 17.4W per foot • Voltage 24V DC • Lifetime 50 000 hours
Power supply specifications	• CLASS 2 Constant Voltage Power Supply • Input: 90-130V AC, 50/60Hz, 24 V DC ≤ 122W; Output: 23.5 to 24.5VDC, 0 to 4.2A • Protection: Overload, over voltage, short circuit.