

ALTH

5050-BAR-U

DECODEL
PAR Luminaire

SPECIFICATION SHEET

PROJECT NAME / No:


TYPE: _____ QTY: _____



ALTH
5050-BAR-U



STRUCTURES DIMENSIONS::

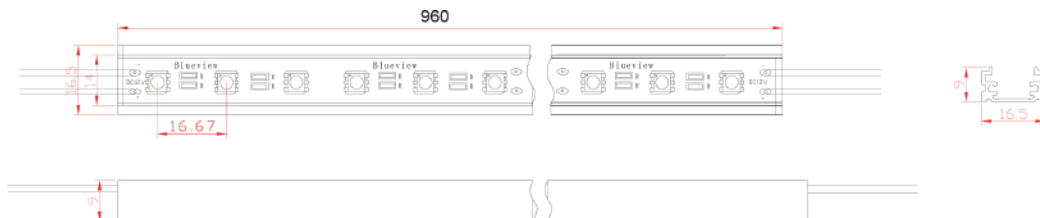

Notes: 1. All dimension units are millimeters.
2. All dimension tolerance is ± 1 mm unless otherwise noted

APPLICATION::

- Cabinets, cosmetic counter and jewelry display case lighting source
- Indoor and outdoor decoration lighting source, like hotels, restaurants, etc
- Other lighting projects

DECODEL
PAR Luminaire

Toll Free 1 888-653-3533 - Tel. 514 448-1574
OFFICE AND SHOWROOM
6068 Metropolitain East, Montreal (Québec) H1S 1A9

ALTH
5050-BAR-U

FEATURES::


- Available in different LED types. SMD, Super Flux, Round LED, etc.
- U shape aluminum profile, excellent heat diffusion
- Fixing clips provided for easy installation
- Input voltage: 12V DC
- LED quantity each piece: 48pcs
- Length available at 960mm. Customization available

TECHNICAL PARAMETER::


Item No.	Color temperature (K)	Operating voltage (V)	Current (mA)	Wattage (w)	View Angle	Luminous flux (Lm)		LED Qty (pcs)
						min	max	
ALTH 5050-BAR-U	6000-6500	12	≤ 960	11.52	120°	865	960	48

Illumination Chart


LB21, 3.3W/ft, Epi-star
LB21-DW-L30

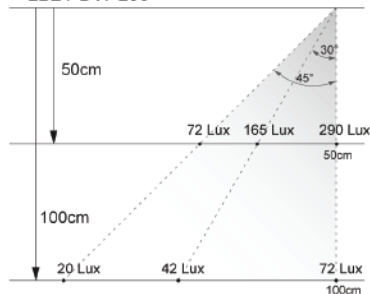

LB21-NW-L30

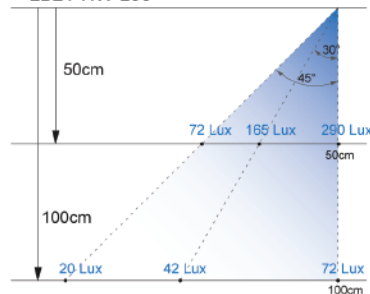

LB21-WW-L30

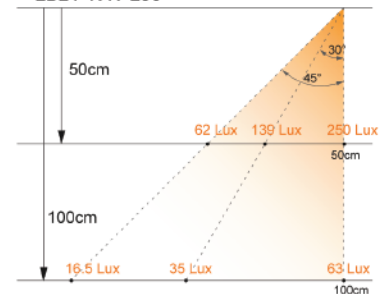

* L15=0.5×L30; L60=1.65×L30; L90=2.15×L30; L120=2.25×L30 @50cm

* L15=0.5×L30; L60=1.85×L30; L90=2.70×L30; L120=3.5×L30 @1M