SPECIFICATION SHEET

PROJECT NAME / No:

TYPE: ______ QTY: _____

Mod-911KIT

DECODEL


P IP SERIES

Mod-911KIT



MOD-911KIT

STRUCTURE DIMENSIONS::

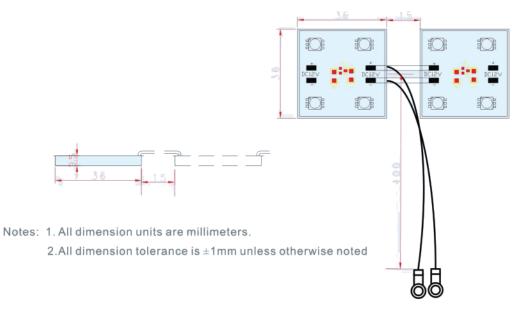



Toll Free 1 888-653-3533 - Tel. 514 448-1574 OFFICE AND SHOWROOM 6068 Metropolitain East, Montreal (Quebec) H1S 1A9

Mod-911KIT



FC c Us

CE ROHS

MOD-911KIT


FEATURES::

- 4pcs 5050 SMD LEDs each module, with wide viewing angle
- High brightness, especially suitable for big LOGO
- Input voltage: DC12V
- Easy installation, 3M adhesive tape in the back of aluminium shell
- Waterproof index: IP67
- There is constant current IC each module, LED can be better protected against overvoltage and overcurrent
- Constant current IC could enable wide voltage input, make it ranges 11V to 14V
- With constant current IC, avoid voltage decay, so as to make sure the consistency of brightness is much better
- Perfect lighting uniformity, the color temperature is accurated to \pm 250K, assrued different batch with the same color temperature

TECHNICAL PARAMETER (TA=25°C)::

Color	Operating Voltage (V)	Current (mA)	Wattage (W)	View angle	Luminous min	s Flux (Im) max	LED QTY (pc)	Color Temperature (K)
Red	11-14	≤ 160	≤ 1.76-2.24	120°	30	40	2	625

TECHNICAL PARAMETER (TA=25°C)::





Toll Free 1 888-653-3533 - Tel. 514 448-1574 OFFICE AND SHOWROOM 6068 Metropolitain East, Montreal (Quebec) H1S 1A9