

Mod-front-light-kit




SPECIFICATION SHEET


PROJECT NAME / No:

TYPE: _____ QTY: _____

Mod-front-light-kit

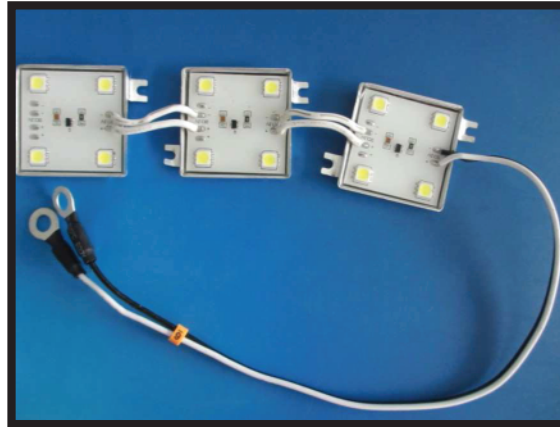

STRUCTURE DIMENSIONS::

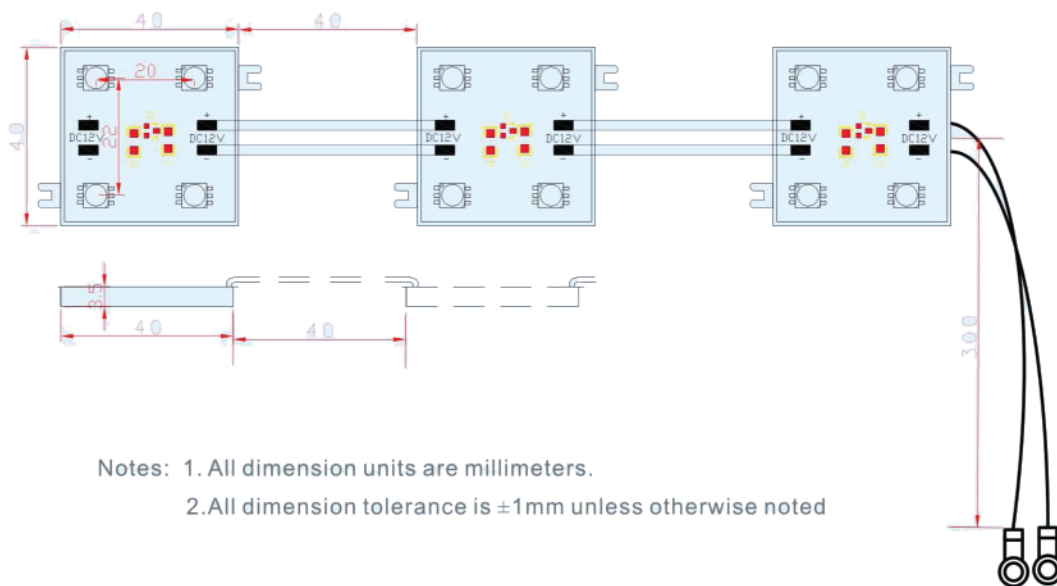

Mod-front-light-kit



FEATURES::

- 4pcs 5050 SMD LEDs each module, with wide viewing angle
- High brightness, especially suitable for big LOGO
- Input voltage: DC12V
- Easy installation, 3M adhesive tape in the back of aluminium shell
- Waterproof index: IP67
- There is constant current IC each module, LED can be better protected against overvoltage and overcurrent
- Constant current IC could enable wide voltage input, make it ranges 11V to 14V
- With constant current IC, avoid voltage decay, so as to make sure the consistency of brightness is much better
- Perfect lighting uniformity, the color temperature is accurated to $\pm 250K$, assured different batch with the same color temperature

TECHNICAL PARAMETER (TA=25°C)::

Color	Operating Voltage (V)	Current (mA)	Wattage (W)	View angle	Luminous Flux (lm)		LED QTY (pc)	Color Temperature (K)
					min	max		
White	11-14	≤ 240	$\leq 2.64-3.36$	120°	200	240	3	6000-6500

TECHNICAL PARAMETER (TA=25°C)::

