



<b>ELECTRONIC POWER SUPPLY</b> <b>BLOC D'ALIMENTATION ELECTRONIQUE</b>				
<b>CONSTANT VOLTAGE</b> <b>TENSION CONSTANTE</b>		<b>24V DC</b>		<b>200W</b>
IEC Protection Protection CEI	<b>Class 1</b>	Ingress Protection Indice de protection	<b>IP67</b>	
Ground Class Classe mise à terre		Dimming Gradation		
Model Modèle	<b>TFT-DIM-PS-100 130VAC-CV-24V-200W-ELV-HW-IP67-DRBX</b>			LM42496-05

## FEATURES

- Enclosed in a surface mountable DRBX junction box to protect wiring
- Built-in active PFC function
- High efficiency: up to 87%
- Protections: short circuit/over loading/ over current
- Full protection aluminum housing, easy installation
- Cooling by free air convection
- Work with leading edge (TRIAC) and trailing edge dimmers
- Strong compatibility, flicker-free dimming

## SPECIFICATION

OUTPUT	DC Voltage	24VDC
	Voltage Accuracy	±0.5V
	Rated current	8.33A
	Rated Power	200W
INPUT	Voltage Range	100 ~ 130VAC (90-130V DC can customized)
	Frequency Range	47 ~ 63HZ
	Power Factor (Typ.)	0.6/220V
	Full Load Efficiency (Typ.)	86%
	AC Current (Typ.)	1.76A
	Leakage current	< 0.70mA/220VAC
PROTECTION	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.
	Over load / Over Current	≤ 120% / ≤ 1.4*1 out
ENVIRONMENT	Working TEMP.	-40 ~ +60°C
	Working Humidity	20~90%RH, non-condensing
	Storage TEM., Humidity	-40~+80°C, 10~95%RH
	TEMP. coefficient	±0.03%/°C (0 ~ 50°C)
	Vibration	10 ~ 500Hz, 2G 10 min./1 cycle, period for 60 min. each along X,Y,Z axes
SAFETY & EMC	Safety standards	EN61347-1 EN61347-2-13
	Withstand voltage	I/P-O/P: 3.75CHAC
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25 °C/70%RH
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 (≥50%load)
EMC IMMUNITY	EN61000-4-2,3,4,5,6,11(surge4KV)	


## CARACTÉRISTIQUES

- Monté dans un boîtier de jonction DRBX pour la protection du câblage
- Fonction intégrée PFC actif
- Rendement élevé: jusqu'à 87%
- Protections: court-circuit / surcharges / surintensités
- Boîtier en aluminium de protection complète, installation facile
- Refroidissement par convection d'air libre
- Fonctionne avec gradateurs de type phase directe (TRIAC) et phase inverse
- Haute compatibilité, gradation sans scintillement

## SPECIFICATION

SORTIE	Tension DC	24VDC
	Précision de tension	±0.5V
	Courant	8.33A
	Puissance nominale	200W
ENTRÉE	Gamma de tension	100 ~ 130VAC (90-130V DC peut personnaliser)
	Gamma de fréquences	47 ~ 63HZ
	Facteur de puissance (typ.)	0.6/220V
	La pleine efficacité de charge (typ.)	86%
	Courant AC (typ.)	1.76A
	Courant de fuite	< 0.70mA/220VAC
PROTECTION	Court-circuit	Mode Hiccup, récupère automatiquement après l'état de défaut est supprimé.
	Surcharge / surintensité	≤ 120% / ≤ 1.4*1 en dehors
ENVIRONNEMENT	TEMP de travail.	-40 ~ +60°C
	Humidité de travail	20~90%RH, sans condensation
	TEMP Stockage., Humidité	-40~+80°C, 10~95%RH
	TEMP. coefficient	±0.03%/°C (0 ~ 50°C)
	Vibration	10 ~ 500Hz, 2G 10 min./1 Cycle, période pendant 60 min. chaque long X,Y,Z axes
SÉCURITÉ & EMC	Les normes de sécurité	EN61347-1 EN61347-2-13
	Surintensité	I/P-O/P: 3.75CHAC
	La résistance d'isolement	I/P-O/P: 100MΩ/500VDC/25 °C/70%RH
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 (≥50%charge)
EMC IMMUNITÉ	EN61000-4-2,3,4,5,6,11(poussée4KV)	

## WIRING DIAGRAM / SCHÉMA DE BRANCHEMENT

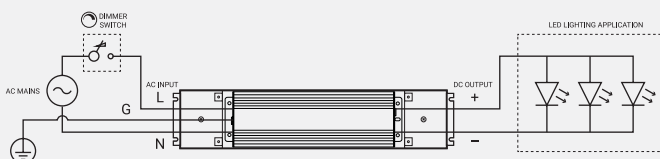

## MECHANICAL DIMENSIONS / DIMENSIONS MÉCANIQUES

Units / Unités : mm

