


SLIMDEL RGB
FEUILLE D'INSTALLATION
SLIMDEL RGB
INSTALLATION SHEET

1. Installation

BRANCHEMENT POUR SLIMDEL RGB PRISE MURALE

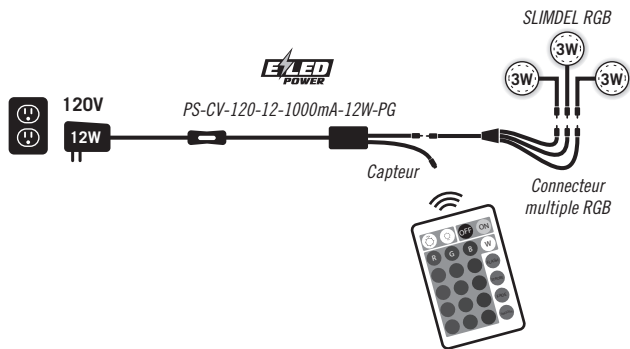


Safe, Fast and Easy to install with the EZLED POWER
Installation simple et rapide avec le système de connexion
EZLED POWER



1. Installation



SLIMDEL RGB PLUG IN CONNECTION

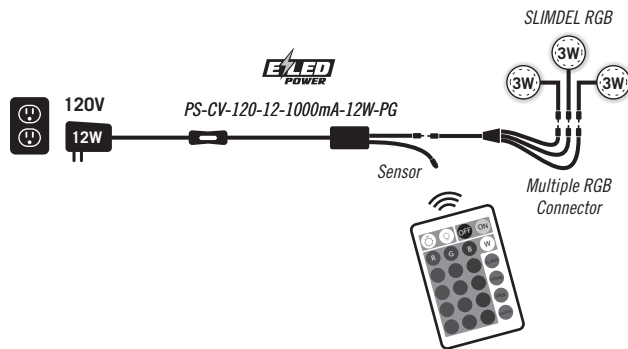

2. Tableau des grandeurs

SLIMDEL	Size
Diamètre	2"5/16
En surface hauteur	5/16"

3. Plan d'installation

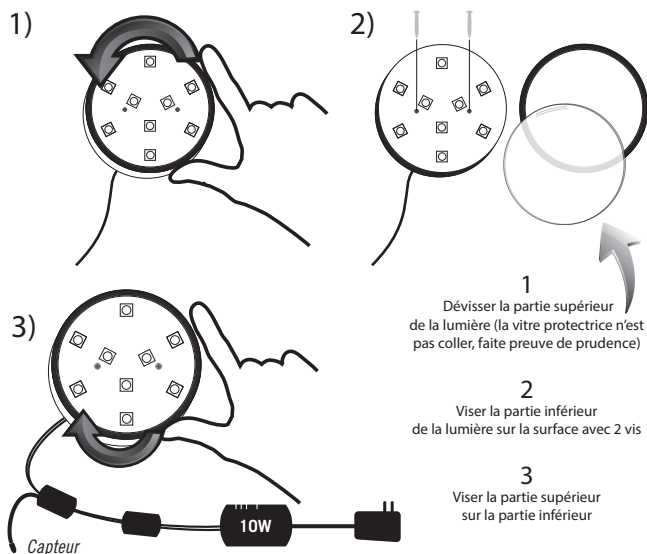

Direction : Lors du passage en mode quatre dynamique (Changement de 7 couleurs, tout fondu, Fondu de 7 couleurs, Changement de 3 couleurs), le bouton de "luminosité +" / "luminosité -" signifie la vitesse de changement de lumière est haute / basse. Il y a 32 étapes en tout.

Luminosité + (16 en tout)	Luminosité - (16 en tout)	FERMER	OUVRIR
Rouge statique	Vert statique	Bleu statique	Blanc statique
Orange statique	Vert pois statique	Bleu foncé statique	Changement de 7 couleurs
Jaune foncé statique	Cyan statique	Brun statique	Tout fondu
Jaune statique	Bleu pâle statique	Rose statique	Fondu de 7 couleurs
Jaune pâle statique	Bleu ciel statique	Mauve statique	Changement de 3 couleurs

4. Certifications

BLOC D'ALIMENTATION



Certification des Underwriters Laboratories concernant la sécurité du produit.

LISTED
E332084



! Mise en garde

1. Toujours brancher la charge de lumière avant de mettre le courant!
2. Veuillez suivre le code du bâtiment et ne pas installer sans protection conforme à moins de 3 pouces de toute isolation.

2. Size Chart

SLIMDEL	Size
Diameter	2"5/16
Surface height	5/16"

3. Installation plan

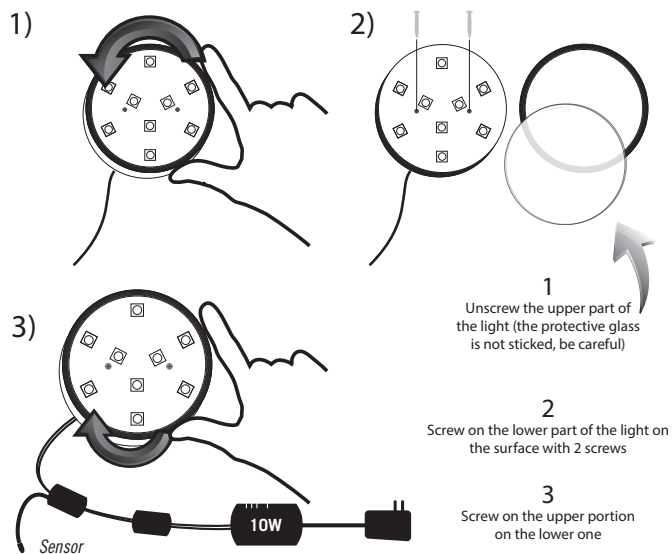

Direction : When switching to four dynamic mode (7 colors jumpy change, All fade out & fade in, 7 colors fade change, 3 base color jumpy), the button of "brightness +" / "brightness -" means the speed of light change is up / down. There are 32 steps in all.

Brightness + (16 in all)	Brightness - (16 in all)	OFF	ON
Static Red	Static green	Static blue	Static white
Static Orange	Static pea green	Static dark blue	7 colors jumpy change
Static dark yellow	Static cyan	Static brown	Fade out & fade in
Static yellow	Static light blue	Static pink	7 colors fade change
Static straw yellow	Static sky blue	Static purple	3 base color jumpy

4. Certifications

POWER SUPPLY



Certification of the Underwriters Laboratories in relation to the product's safety.

LISTED
E332084

! Warning

1. Always connect LED load before connecting power source!
2. Please follow all reglementation and do not install without conform protection at less than 3 inches of all insulation.