flexide

Client

Туре

43 W/roll total

Project

Qty

Date

ZIG2835-12V-60-8mm-8.5W-3000K-IP22



Specification Sheet

| PHYSICAL |
|----------|
|----------|

Г

| Flexible LED Strip | | |
|--------------------|--|---|
| 2835 | | |
| 5/16 in | 8 mm | |
| 16.4 ft | 5 m | |
| 18.3 LED/ft | 60 LED/m | 300 LED/roll total |
| 1.97 in | 50 mm | 3 LED |
| 50 000 Hrs | | |
| IP22 | | |
| | 2835 5/16 in 16.4 ft 18.3 LED/ft 1.97 in 50 000 Hrs | 2835 5/16 in 8 mm 16.4 ft 5 m 18.3 LED/ft 60 LED/m 1.97 in 50 mm 50 000 Hrs 50 mm |

ELECTRICAL

| Input Type | DC, Constant Voltage | <u>)</u> |
|--------------------|----------------------|----------|
| Input Voltage | 12V DC | |
| Rated Power (Max.) | 2.6 W/ft | 8.5 W/m |


| | | 8 ¹² v |
|----|-------------------------|--------------------|
| al | 4 | 8 |
| | | S.C. |
| _ | v Etter stave | |
| | | |
| | Electrical Input | Rated Power (Max.) |
| | CONSTANT VOLTAGE 12V DC | 43 W/roll |

| CONSTANT VOLTAGE | 12V DC | 43 W/roll |
|---------------------|-----------------------|-----------|
| Correlated C | Color Temperature (CC | СТ) 3000К |
| | ↓ | |
| WARM | | COOL |

LIGHTING

| Luminous Flux | 223 lm/ft | 732 lm/m | 3660 lm/roll total |
|----------------------------------|--------------------|----------|--------------------|
| Luminous Efficacy | 91.5 lm/W | | |
| Correlated Color Temperature | 3000K (Warm White) | | |
| Colour Rendering Index | 83.3 | | |
| R9 | 8 | | |
| duv (black-body curve deviation) | 0.0015 | | |

DIMENSIONS

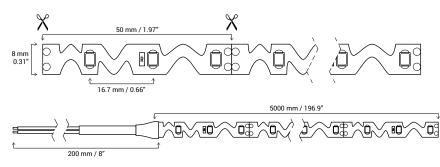

Page 1 January 17, 2017 3:11 PM