


5630-24V-70-15W


CERTIFICATIONS




FEATURES

- 70 LED by meter
- 15W by meter / Voltage 24 VDC
- 5 meters maximum length
- View angle 120°
- Long lifetime
- IP AVAILABLE: IP22 / IP68

COLOR TEMPERATURE:

-  3000K
-  4200K
-  6200K

DIMENSION

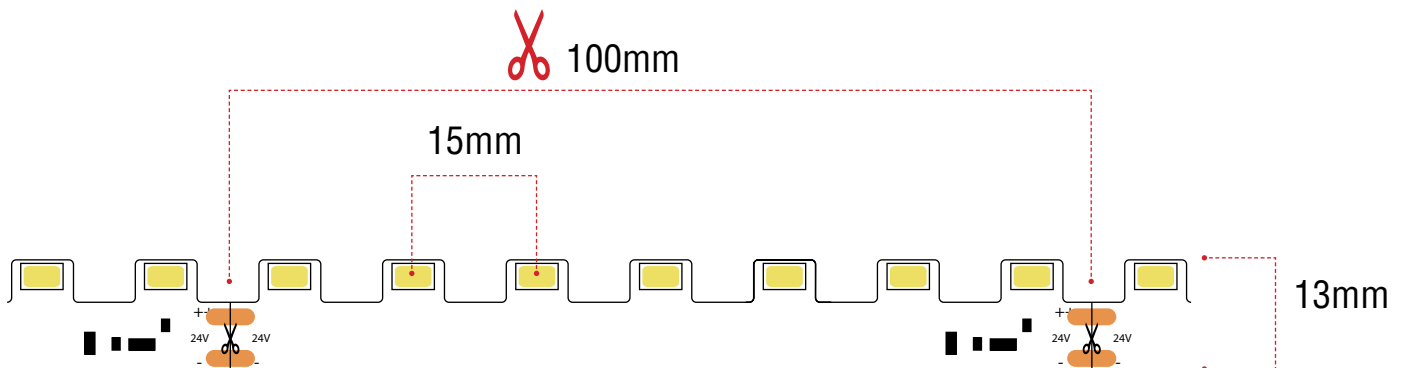

- 5000 mm in length (5 meters per roll)
- 13 mm wide
- You can cut at 7 LED



NOTES : 1. All dimension units are millimeters.
 2. All dimension tolerance is +3/-1mm unless otherwise noted.

PROJECT / PROJET: # PO:
 CLIENT: DATE:
 NOTES: VOLTS:

LUMILAB-Lightsource test report 5630-24V-CONSTANT CURRENT PURE WHITE

Product Remark

Type:	Factory:	
TempIn:25.0	Temp:24.8	Humidity:65%
Operator:	Date:2015-09-18	

CIE Color Parameter

Chromaticity Coordinate: $x=0.3237$ $y=0.3299$ $u=0.2051$ $v=0.3136$ $duv=-0.0018$
 CCT: $T_c= 5928K$ Dominant wave: 488.2nm Purity: 3.5%
 Peak Wave: 455nm Half Width: 21.6nm RatioR=17.7% G=78.2% B=4.1%

Rending Index Ra= 93.3

R1 =96	R2 =97	R3 =91	R4 =93	R5 =91	R6 =90	R7 =96
R8 =93	R9 =83	R10=87	R11=92	R12=54	R13=98	R14=94

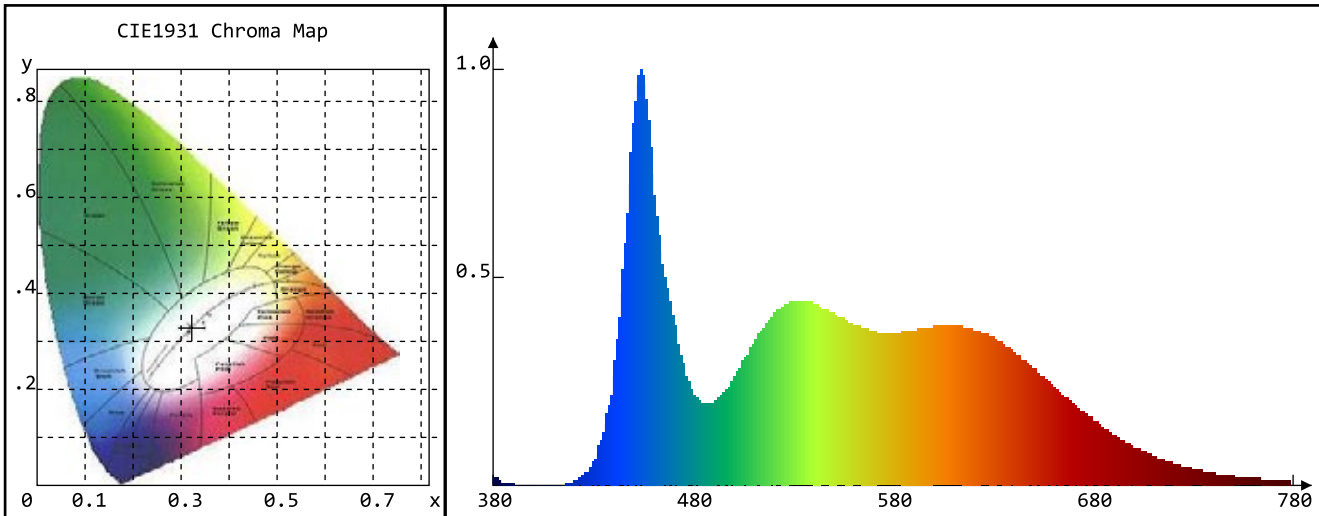


Photo Parameter

Flux: 1240.2 lm Light Efficacy: 83.48 lm/W Lumi.Pow. : 0uW

Electrical Parameter

Voltage: 24V Current:0.619A Power: 14.856W/M
 4.5278 W/pied

Instrument Status

Range: 380nm-780nm	Interval: 5nm	PMT HV: -352V
Main: 1	Id: 9	Ip: 11625
Reference: 2	REF: 4767	%: -5.538%