

1460


1000 SERIES

LUMEN™
Truss




1460 PROFILE

1000 Series

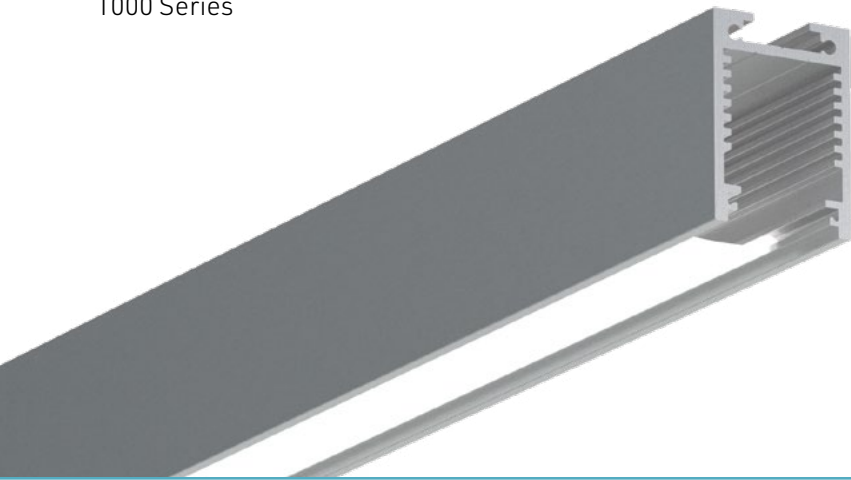

Cross-section dimensions:




The 1460 can house all the different IP68 lumen Packages we offer. With a new sliding lens design, this profile offers a wide variety of installation, from fixed to suspended mounting. It also comes in a collection of trendy colors with the elegant aluminum finish. Its design is ideal for office, boutique and hotel applications or to enhance wall lighting.

FEATURES

- Custom length by sections of 2 to 240 inches (6m).
- NEW slidable lens system.
- Designed to give a uniform light without hot spots with our prime lens.
- 2 colors to choose from in addition to the aluminum finish: black and white.
- 15 LED light sources to choose from 2400 K to 6200 K, including WarmDim, Tunable white, RGB and RGBW.
- Made of ALCOA 6063-T5 aluminum alloy for superior heat dissipation and increased LED light source life.
- Surface or suspended installation.

OPTIONS



























LINEAR WEIGHT

0.47 lbs/ft, 0.70 kg/m (without lens or insert)








PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 <p>1460 - Series 1400, alu</p>	 <p>PR - Prime lens</p>	 <p>PH - Phantom bracket</p>	<p>NOTE: Only available with SUS bracket (suspension)</p> 	 <p>HER - High efficiency reflector</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
 <p>1461 - Series 1400, black</p>	 <p>NO - No lens</p>	 <p>MG - Magnetic kit</p>	<p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p> 	 <p>NO - No option</p>	
 <p>1462 - Series 1400, white</p>	<p>Easy beam angle adjustment</p> 	 <p>WSB - Surface 2-side bracket</p>	<p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p> 		
 <p>146X - Series 1400, custom color IMPORTANT: Give RAL color No See Appendix 1 on page 158</p>		 <p>SWI - Interior Swivel bracket 180°</p>	 <p>SWS - Surface 1-side bracket</p>	<p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p> 	
RAL NUMBER		 <p>AWS - Surface 90° bracket</p>	 <p>SWE - Exterior Swivel bracket kit</p>	 <p>NO - No canopy</p>	
		 <p>W45 - Surface 45° bracket</p>	 <p>SUS - 1400 suspension kit</p>		
		 <p>NO - No mounting hardware</p>			
PROFILE	LENS	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p> <p>WD1 - WarmDim 14W</p> <p>WD2 - WarmDim 17W</p> <p>TW1 - Tunable White 11W</p> <p>TW2 - Tunable White 19W</p> <p>RGB1 - RGB 14W</p> <p>RGB2 - RGB 19W</p> <p>RGBW1 - 3000K</p> <p>RGBW2 - 3000K 4in1</p>	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LP4 - 400 LM / 5.8W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for Warmdim Tunable White & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>1 - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: IP68 not available with motion sensor option.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC**</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <p>TITLE 24 COMPONENTS</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

NOTES

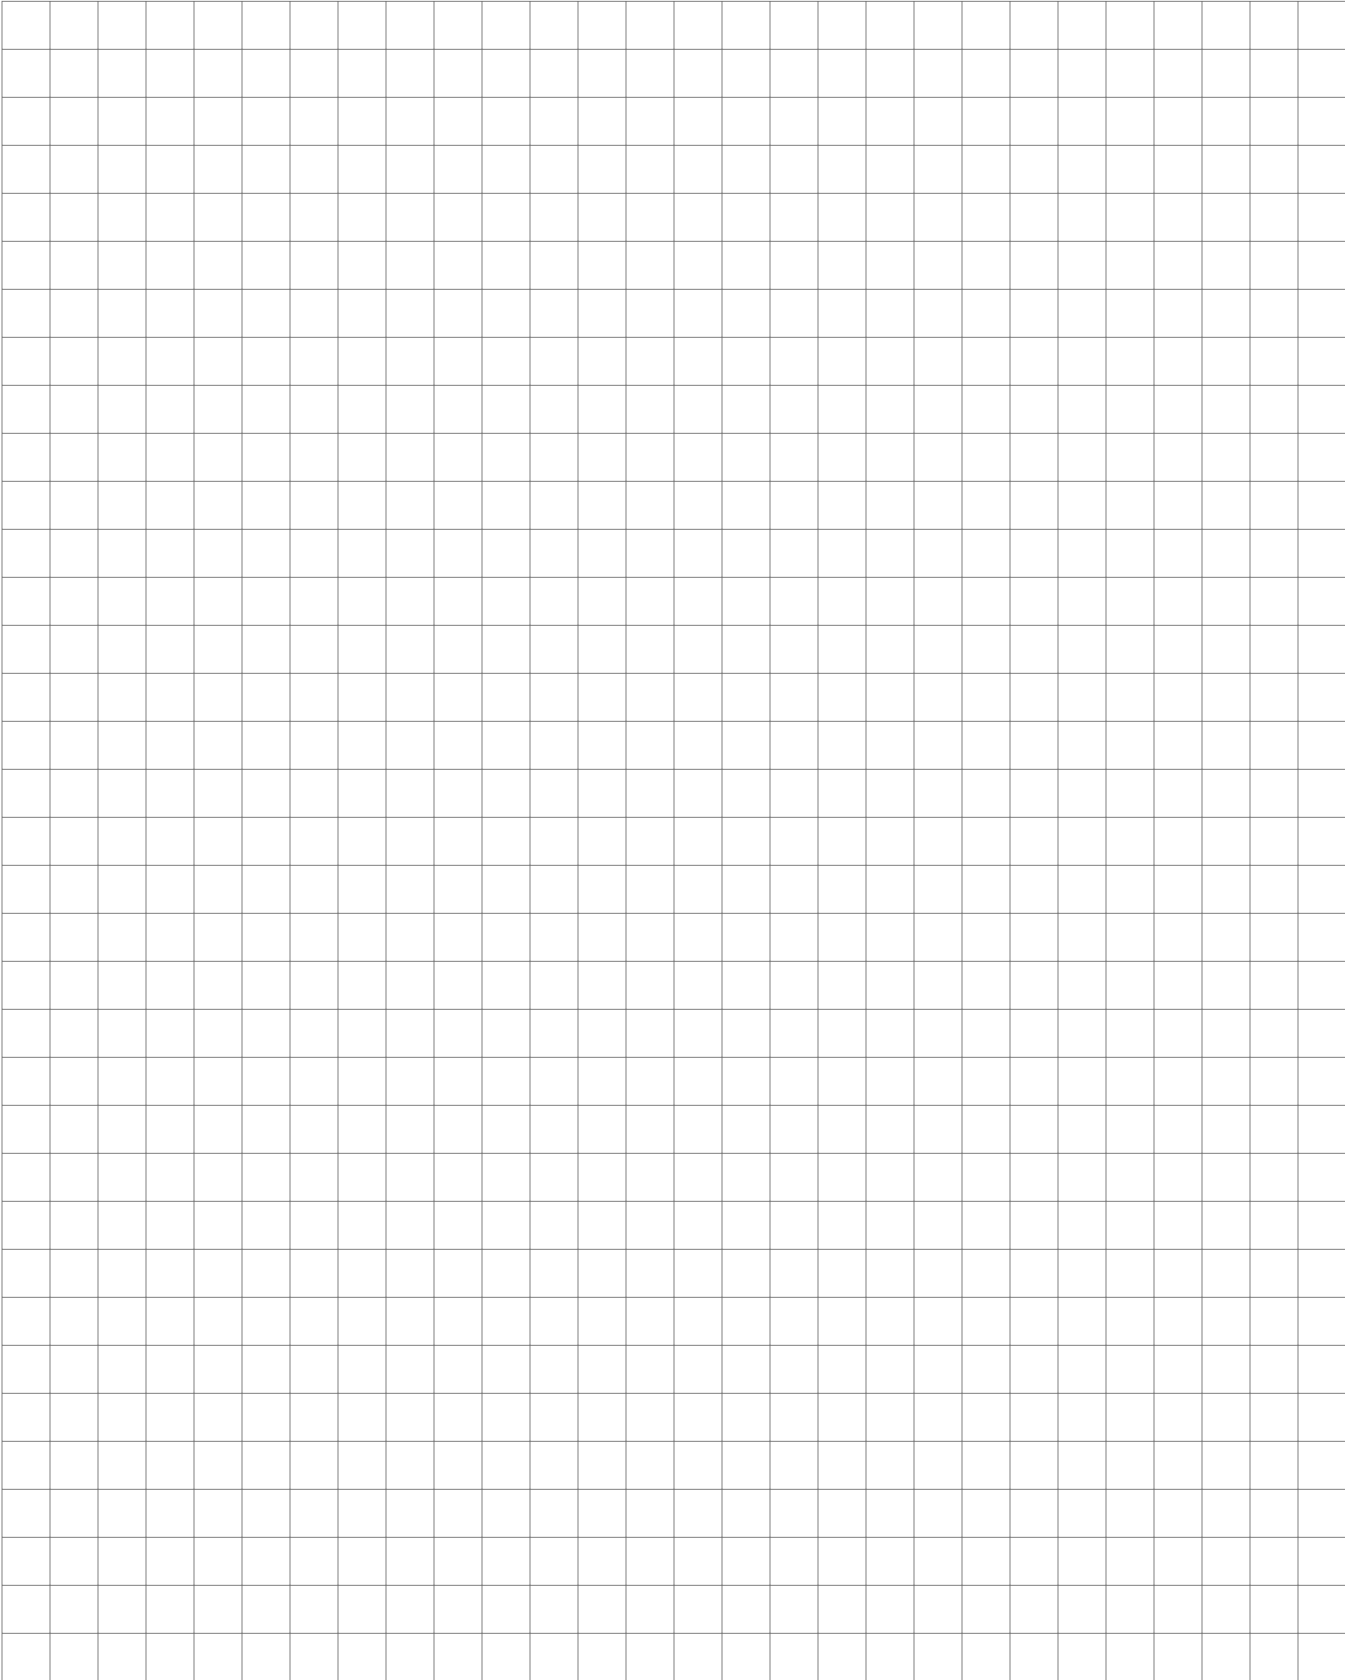



CONTACT US

ADDRESS

9221 Edison
Montreal, Quebec,
H1J 1T4, Canada

FAX

1.514.903.0649

EMAIL

info@lumentruss.com

PHONE

1.855.384.3384

WEBSITE

www.lumentruss.com



**MADE IN
NORTH AMERICA**

**LUMEN™
Truss**