


# 2000 PROFILE

2000 Series



Cross-section dimensions:

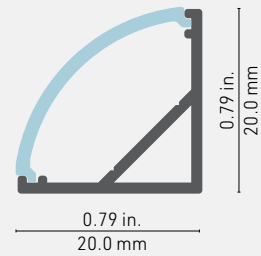

## WELL FOCUSED ON THE TASK!

Offering lighting without hot spots at a **45-degree** angle from a corner, the 2000 Series excels at maximizing appeal of the products in POP stands, while maintaining a minimalist style.

### FEATURES

- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

### OPTIONS



### LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **14mm** wide.












IP68: Compatible with LED engines up to **10mm** wide.

### LINEAR WEIGHT

0.117 lbs/ft, 0.175 kg/m (without lens)



Boutique Exclucity - Project Manager: J. W. Design

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>2000 - 2000 Profile, alu</p>	 <p>CLR - Clear lens, round</p>	 <p>45 - 45° corner bracket</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>OXR - Optiflex lens, round</p>	 <p>3M - Mounting tape, double face</p>	
	 <p>OPR - Opal lens, round</p>	 <p>NO - No mounting hardware</p>	
	 <p>PRR - Prime lens, round</p>		
	 <p>OXS - Optiflex lens, square</p>		
	 <p>OPS - Opal lens, square</p>		
	 <p>NO - No lens</p>		
















**2000**

PROFILE

LENS

MOUNTING HARDWARE

LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> <li> 24 - 2400K</li> <li> 27 - 2700K</li> <li> 30 - 3000K</li> <li> 35 - 3500K</li> <li> 42 - 4200K</li> <li> 53 - 5300K (LHP only)</li> <li> 62 - 6200K (LP only)</li> <li> WD1 - WarmDim 14W</li> <li> WD2 - WarmDim 17W</li> <li> TW1 - Tunable White 11W</li> <li> TW2 - Tunable White 19W</li> <li> RGB1 - RGB 14W</li> <li> RGB2 - RGB 19W</li> <li> RGBW1 - 3000K</li> <li> RGBW2 - 3000K 4in1</li> </ul>	<ul style="list-style-type: none"> <li>LP0 - 128 LM / 1.5W FT / 90+CRI</li> <li>LP1 - 160 LM / 1.5W FT / 90+CRI</li> <li>LP2 - 255 LM / 3.0W FT / 90+CRI</li> <li>LP3 - 308 LM / 4.5W FT / 90+CRI</li> <li>LP4 - 400 LM / 5.8W FT / 90+CRI</li> <li>LHP - 700 LM / 7.0W FT / 95+CRI</li> </ul> <p><b>Note:</b> Not applicable for Warmdim Tunable White &amp; RGB color temperatures</p>	<ul style="list-style-type: none"> <li>HW3 - Hardwire 3 FT</li> <li>HW6 - Hardwire 6 FT</li> <li>HW9 - Hardwire 9 FT</li> <li>HWX - Hardwire custom FT</li> <li>DC3 - DC plug 3 FT</li> <li>DC6 - DC plug 6 FT</li> <li>DC9 - DC plug 9 FT</li> <li>DCX - DC plug custom FT</li> <li>NO - No lead</li> </ul>	<ul style="list-style-type: none"> <li>I - IP22 indoor dry location</li> <li>O - IP68 wet/damp location</li> </ul> <p><b>Note:</b> LHP, WD2 and RGBW options are only available in IP22.</p>	<ul style="list-style-type: none"> <li>A - Non-dimming</li> <li>B - ELV dimming 120V AC</li> <li>C - ELV dimming 120/277 VAC**</li> <li>D - 0/10V dimming 120/277 VAC</li> <li>E - Non-dimming DC plug in</li> <li>F - DMX</li> <li>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</li> <li>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</li> <li>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</li> <li>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</li> <li>NO - No driver</li> </ul>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 5px; width: fit-content;"> <p>TITLE</p> <p><b>24</b></p> <p>COMPONENTS</p> </div>

COLOR TEMPERATURE CCT


LUMEN PACKAGE

LEAD IN LEAD OUT

USAGE

POWER SUPPLY/CONTROL

ASSEMBLY DIMENSION / DIMENSION D'ASSEMBLAGE

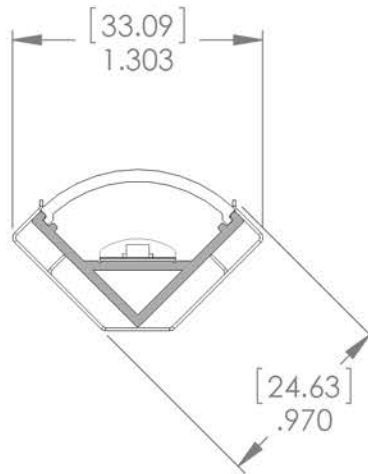

# NOTES

