


4260 PROFILE

4000 Series



Cross-section dimensions:

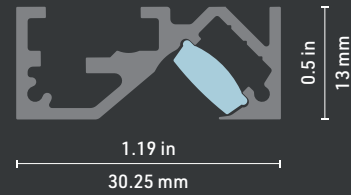

THE ELEGANCE OF SIMPLICITY

A new compact profile has been added to this thin series! Profile 4260 provides accent lighting at an angle of 53° to highlight products on shelves or to cut out the underside of cabinets. Exclusively: the new high-end SiLens lens made of flexible silicone, which can be installed with a simple touch of the finger. Even better, the phantom brackets perfectly conceal the surface installation. Ideal for commercial or residential applications.

FEATURES

- Compact aluminum profile: 30.25 mm x 13 mm (1.19 in x 0.5 in)
- Custom lengths from 2 to 192 inches (4.88 m/16 ft) in aluminum
- 53° lighting angle
- 4 lumen packages: LP0 (128 lm/1.5 W/ft), LP1 (160 lm/1.5 W/ft), LP2 (255 lm/3.0 W/ft) et LP3 (308 lm/4.5 W/ft) in 8 mm width with 5 mm tape guide
- 6 color temperatures (2400 K to 6200 K), CRI 90+
- Exclusive optics: SiLens, made of flexible silicone
- End caps with milled hole on both sides for the feed wire
- Surface installation with phantom brackets
- Optional power supply unit with DC socket or hardwire connection
- Indoor use, IP22
- Conforms to UL STD. 2108 for closet usage




LED STRIP COMPATIBILITY

Compatible with LED strips up to **8 mm** wide.

LINEAR WEIGHT


0.25 lbs/ft, 370g/m

RECESSED INSTALLATION IN 1/2" GROOVE

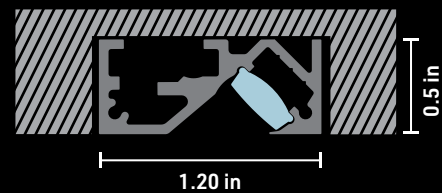




APPLICATION AREAS

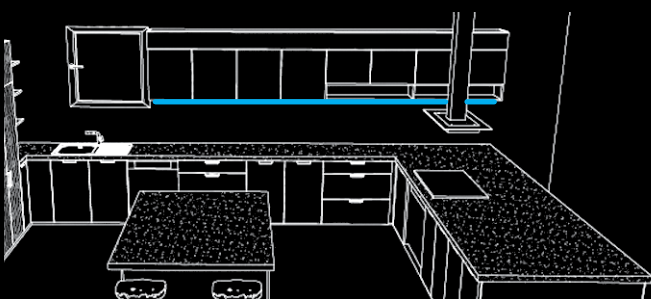








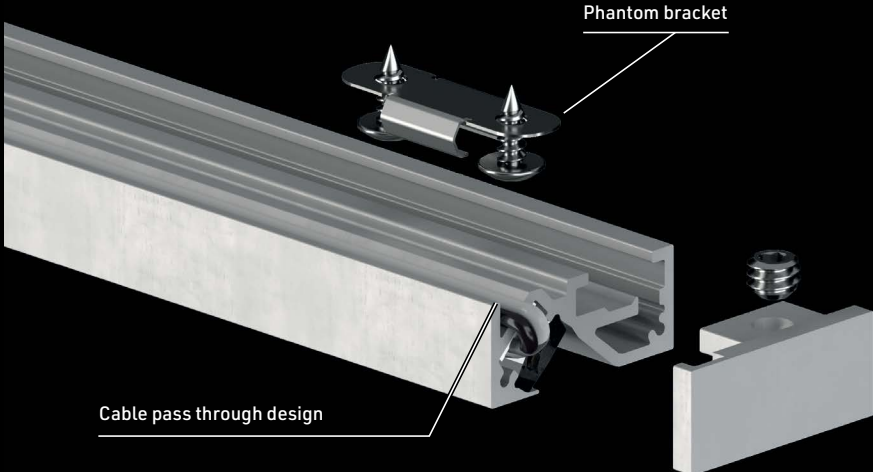









AN INTELLIGENT DESIGN

A notch on the underside completely conceals the TR64 mounting wire, giving the luminaire an even more aesthetic look. The encaps are also pass-through and the extrusion has been designed with a recess to insert the mounting clips.



| PROFILE | LENSES | MOUNTING HARDWARE | LENGTH |
|--|--|---|--|
|  4260 - Profile, alu |  SIL - SiLens  NO - No lens |  PH - Phantom bracket  NO - No mounting hardware | Custom length by sections of 2 to 192 inches (6m). |
|  4261 - Profile, black | | | |
|  4262 - Profile, white | | | |
| PROFILE | SIL | MOUNTING HARDWARE | LENGTH |

4000

| COLOR TEMPERATURE | LUMEN PACKAGE* | LEAD IN/OUT | USAGE | POWER SUPPLY/CONTROL | *NOTES |
|--|--|--|--|--|--|
| <ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K  62 - 6200K | <ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI | <ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead | <ul style="list-style-type: none"> I - IP22 indoor dry location | <ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver | <ul style="list-style-type: none"> *The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver  |
| COLOR TEMPERATURE CCT | LUMEN PACKAGE | LEAD IN LEAD OUT | USAGE | POWER SUPPLY/CONTROL | |