



# 5350 PROFILE

5000 Series

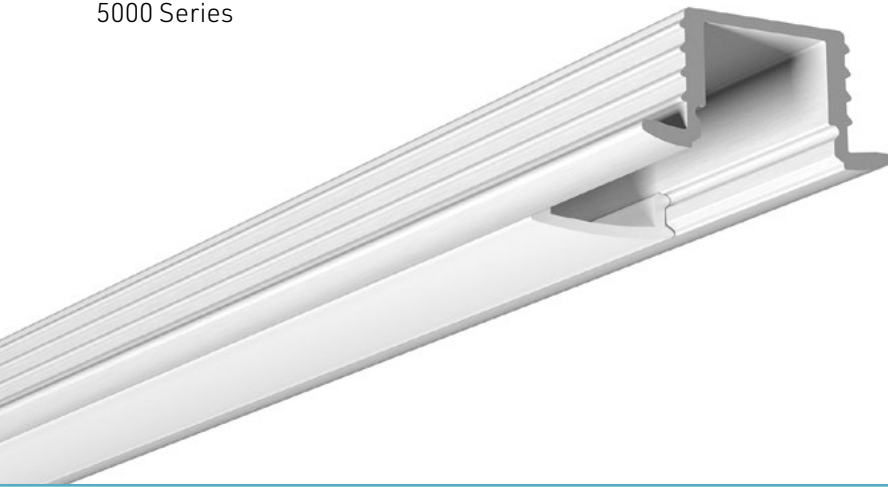

## Cross-section dimensions:

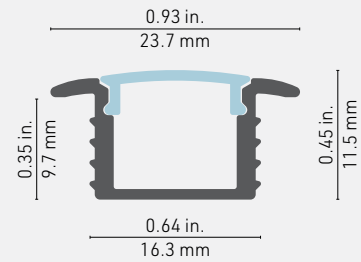

## A COMPACT RECESSED PROFILE

Here is a **compact recessed** profile allowing you to make the light source and the LED invisible. The edges on each side of this extrusion allow a recessed installation, giving it style with a discreet and neat appearance. This profile will **fit in a 5/8 inch** deep recess.

### FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens.
- Designed for a snug fit in a 5/8-inch (16mm) wide, 3/8-inch (10mm) deep recess.
- Custom length by sections of 96 inches (2.44m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

### OPTIONS






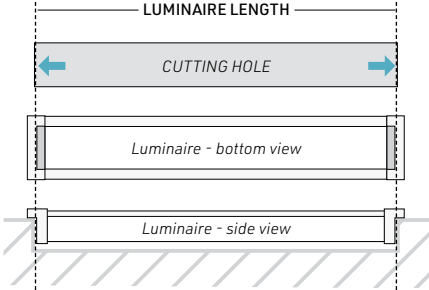






### LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **10mm** wide.














### LINEAR WEIGHT

0.110 lbs/ft, 0.164 kg/m (without lens)




PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p><b>5350</b> - 5350 Profile, alu</p>	 <p><b>OP</b> - Opal lens</p>	 <p><b>3M</b> - Mounting tape, double face</p>	<p>Custom length by sections of 2 to 96 inches (2.44m).</p> <p><b>*NOTE:</b> Follow this diagram to calculate the correct length</p> 
 <p><b>5351</b> - 5350 Profile, black</p>	 <p><b>PR</b> - Prime lens</p>	 <p><b>NO</b> - No mounting hardware</p>	
 <p><b>5352</b> - 5350 Profile, white</p>	 <p><b>NO</b> - No lens</p>		
 <p><b>535X</b> - 5350 Profile, custom color</p> <p><b>IMPORTANT:</b> Give RAL color № See Appendix 1 on page 158</p>			
RAL NUMBER			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH



5000

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> <li> 24 - 2400K</li> <li> 27 - 2700K</li> <li> 30 - 3000K</li> <li> 35 - 3500K</li> <li> 42 - 4200K</li> <li> 53 - 5300K (LHP only)</li> <li> 62 - 6200K (LP only)</li> <li> <b>WD1</b> - WarmDim 14W</li> <li> <b>TW1</b> - Tunable White 11W</li> <li> <b>TW2</b> - Tunable White 19W</li> <li> <b>RGB1</b> - RGB 14W</li> <li> <b>RGB2</b> - RGB 19W</li> </ul>	<p><b>LP0</b> - 128 LM / 1.5W FT / 90+CRI</p> <p><b>LP1</b> - 160 LM / 1.5W FT / 90+CRI</p> <p><b>LP2</b> - 255 LM / 3.0W FT / 90+CRI</p> <p><b>LP3</b> - 308 LM / 4.5W FT / 90+CRI</p> <p><b>LP4</b> - 400 LM / 5.8W FT / 90+CRI</p> <p><b>LHP</b> - 700 LM / 7.0W FT / 95+CRI</p> <p><b>Note:</b> Not applicable for Warmdim, Tunable White and RGB color temperatures</p>	<p><b>HW3</b> - Hardwire 3 FT</p> <p><b>HW6</b> - Hardwire 6 FT</p> <p><b>HW9</b> - Hardwire 9 FT</p> <p><b>HWX</b> - Hardwire custom FT</p> <p><b>DC3</b> - DC plug 3 FT</p> <p><b>DC6</b> - DC plug 6 FT</p> <p><b>DC9</b> - DC plug 9 FT</p> <p><b>DCX</b> - DC plug custom FT</p> <p><b>NO</b> - No lead</p>	<p>I - IP22 indoor dry location</p>	<p><b>A</b> - Non-dimming</p> <p><b>B</b> - ELV dimming 120V AC</p> <p><b>C</b> - ELV dimming 120/277 VAC**</p> <p><b>D</b> - 0/10V dimming 120/277 VAC</p> <p><b>E</b> - Non-dimming DC plug in</p> <p><b>F</b> - DMX</p> <p><b>G</b> - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p><b>I</b> - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p><b>J</b> - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p><b>K</b> - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p><b>NO</b> - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

**Serie 5350 (5350)** LM22520

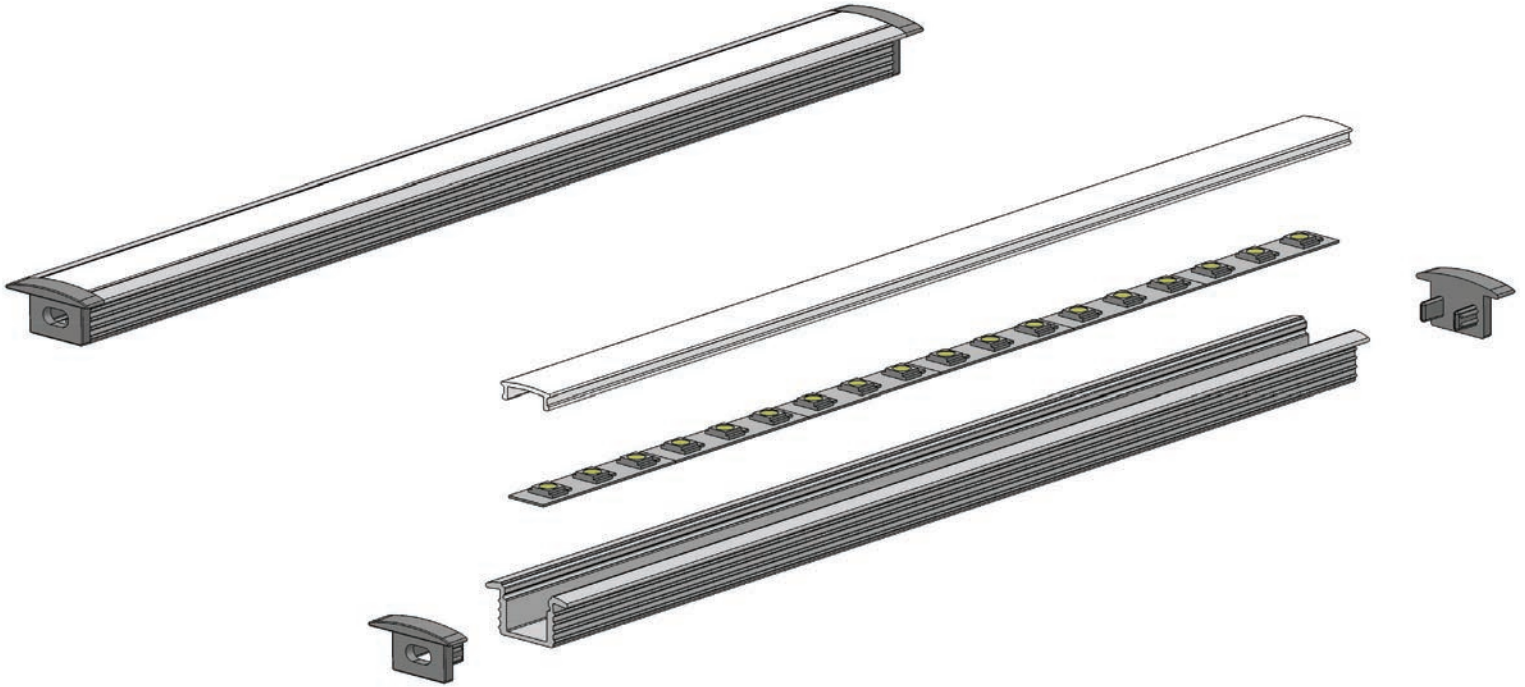

## ASSEMBLY DIMENSION / DIMENSION D'ASSEMBLAGE

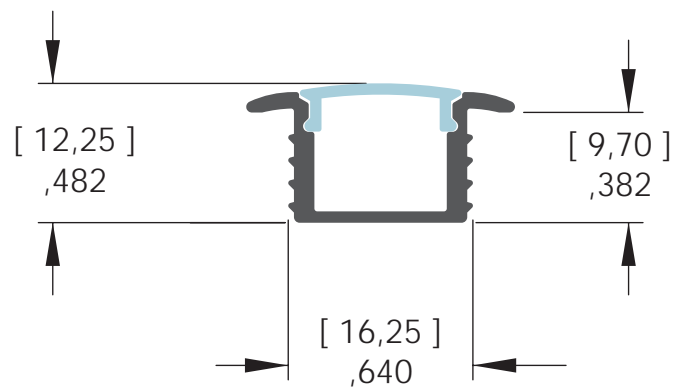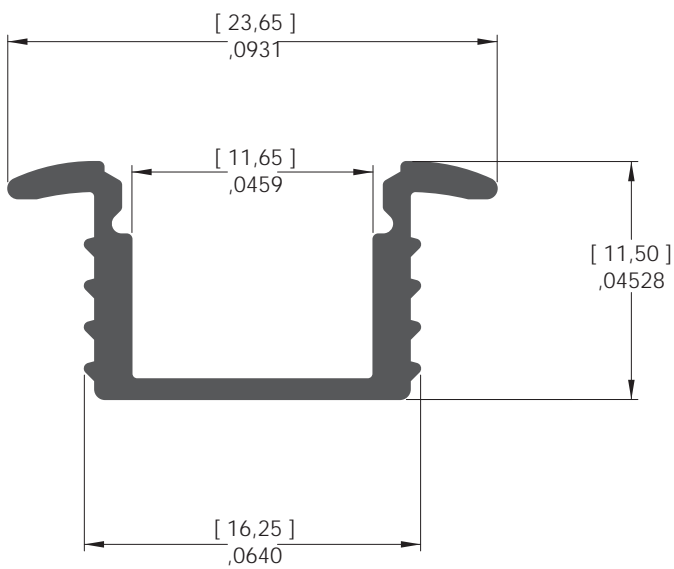

[ mm ]  
inches/pouces

# NOTES

