



7400 (7450) PROFILE

7000 Series

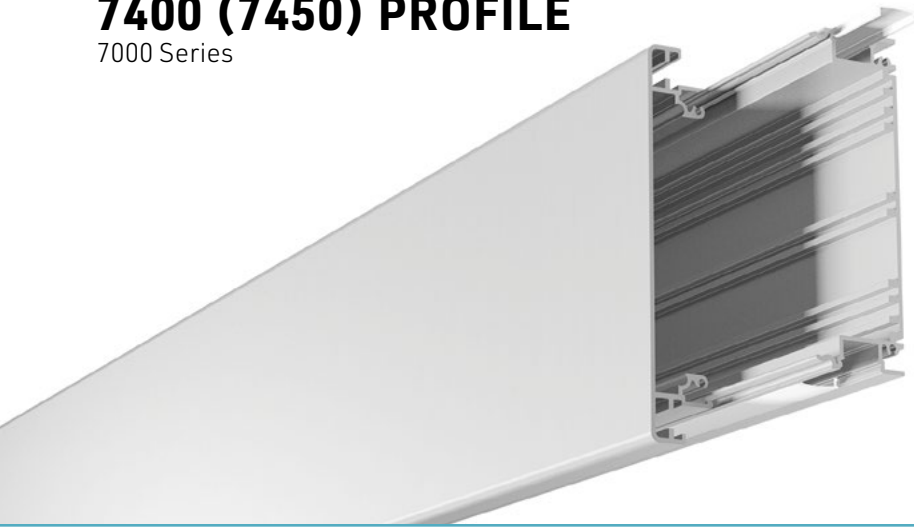

Cross-section dimensions:

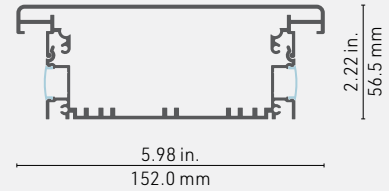

From **flat wall fixtures** to **one-of-a-kind signage**, the 7400 profile with the 7450 faceplate can do it all. The 7400 base accepts most LED engines and lenses of the 1000 Series. The faceplate can be CNC- machined and backlit through an acrylic screen for effective designer signage. Go up to 20 feet long, and finish as desired.

FEATURES

- Designed to create custom lit nameplates / logo signs.
- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less in top and bottom insert.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to meet North American woodworking standards.
- NOTE: Cannot be used for emergency lighting.

OPTIONS


















LED ENGINE COMPATIBILITY

The top and bottom inserts are compatible with LED engines up to **14mm** wide for IP22 and up to **10mm** wide for IP68 options.

LINEAR WEIGHT

1.949 lbs/ft, 2.901 kg/m (with cover plate)



PROFILE	LENS DOWN	LENS UP	LENGTH
 7450 - profile, atu	 CL - Clear lens	 CL - Clear lens	Custom length by sections of 6 to 240 inches (6m).
	 SP - Spread lens	 SP - Spread lens	
	 OX - Optiflex lens	 OX - Optiflex lens	
	 OP - Opal lens	 OP - Opal lens	
	 PR - Prime lens	 PR - Prime lens	
	 FO - Focus lens	 FO - Focus lens	
	 NO - No lens	 NO - No lens	

















***NOTES**

- By default CNC-machined junction box openings are made to match standard octagonal junction box in the center of the backplate of the aluminum profile. For custom options, please contact your local representative.

- Drivers are remote
- To carve your logo on the front cover of the profile, please contact your local representative and submit the logo image in vector format to:

support@lumentruss.com

7450			
PROFILE	LENS DOWN	LENS UP	LENGTH

COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	LEAD IN/OUT	USAGE	POWERSUPPLY/CONTROL**	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD1 - WarmDim 14W  WD2 - WarmDim 17W  TW1 - Tunable White 11W  TW2 - Tunable White 19W  RGB1 - RGB 14W  RGB2 - RGB 19W  RGBW1 - 3000K  RGBW2 - 3000K 4in1  NO - No up light (w/ opal lens) 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LP4 - 400 LM / 5.8W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI NO - No up light (w/ opal lens) <p>Note: Not applicable for Warmdim Tunable White & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location O - IP68 wet/damp location <p>Note: LHP, WD2 and RGBW options are only available in IP22.</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC*** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver 	<ul style="list-style-type: none"> * The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative. ***Only available in 96W - 24W Driver

CCT DOWN CCT UP LM DOWN LM UP LEAD IN LEAD OUT USAGE POWER SUPPLY/CONTROL