

8800 LADDER


8000 SERIES

LUMEN™
Truss




8800 LADDER PROFILE

8000 Series

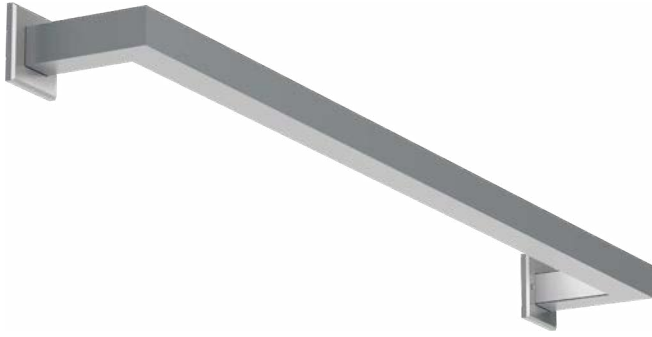

Cross-section dimensions:



This new fixture offers you an incomparable wall application. It gives you many possibilities with its different predetermined lengths of 18, 24 or 36 inches. You can even request a custom length if you wish. Designed for indoor use, the 8800 LADDER is perfect to enhance your decor and bring light to walls and ceilings. Available with the Prime lens and compatible with dimmers, it will meet all your needs.

FEATURES

- Unique design perfect to enhance your decor and bring light to walls and ceilings.
- Straight and clean lines will give a modern look to your decor.
- Comes with a Prime lens.

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines and PCBs up to **33mm** wide.

WEIGHT

0.563 lbs/ft, 0.8378 kg/m, without lenses.












8800 LADDER Profile ordering sheet
















8000 Series

PROFILE	LENSES	OPTION	LENGTH
 8800 LADDER - Profile, Alu	 PR - Prime flat lens	 HER - High efficiency reflector	18 = 18" 24 = 24" 36 = 36"
 8801 LADDER - Profile, Black	 NO - No Lenses	 NO - No option	Custom length available, call to order.
 8802 LADDER - Profile, White			
 880X LADDER - Profile, Custom color			

IMPORTANT: Give RAL color No
See Appendix 1 on page 158

RAL NUMBER

PROFILE LENS OPTION LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE**	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K	LP0 - 128 LM / 1.5W FT / 90+CRI	HW3 - Hardwire 3 FT	1 - IP22 indoor dry location	A - Non-dimming	* Double strip option cannot be used with the reflector.
 27 - 2700K	LP1 - 160 LM / 1.5W FT / 90+CRI	HW6 - Hardwire 6 FT	0 - IP68 wet/damp location	B - ELV dimming 120V AC	**The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.
 30 - 3000K	LP2 - 255 LM / 3.0W FT / 90+CRI	HW9 - Hardwire 9 FT		C - ELV dimming 120/277 VAC***	
 35 - 3500K	LP3 - 308 LM / 4.5W FT / 90+CRI	HWX - Hardwire custom FT		D - 0/10V dimming 120/277 VAC	
 42 - 4200K	LP4 - 400 LM / 5.8W FT / 90+CRI	DC3 - DC plug 3 FT		E - Non-dimming DC plug in	
 53 - 5300K (LHP only)	LHP - 700 LM / 7.0W FT / 95+CRI	DC6 - DC plug 6 FT		F - DMX	
 62 - 6200K (LP only)	Note: Not applicable for Warmdim Tunable White & RGB color temperatures	DC9 - DC plug 9 FT		G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W	
 WD1 - 2200-2700K 14W		DCX - DC plug custom FT		I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC	
 WD3 - 2700-3500K 14W		SUS - Coaxial wire 15 FT		J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC	
 TW1 - Tunable White 11W		NO - No lead		K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC	
 TW2 - Tunable White 19W				NO - No driver	
 RGB1 - RGB 14W					
 RGB2 - RGB 19W					
 RGBW1 - 3000K					
 RGBW2 - 3000K 4in1					

SINGLE-STRIP 1 DOUBLE-STRIP 2*


SINGLE-STRIP 1 DOUBLE-STRIP 2*

LEAD IN LEAD OUT

USAGE

POWER SUPPLY/CONTROL

NOTES

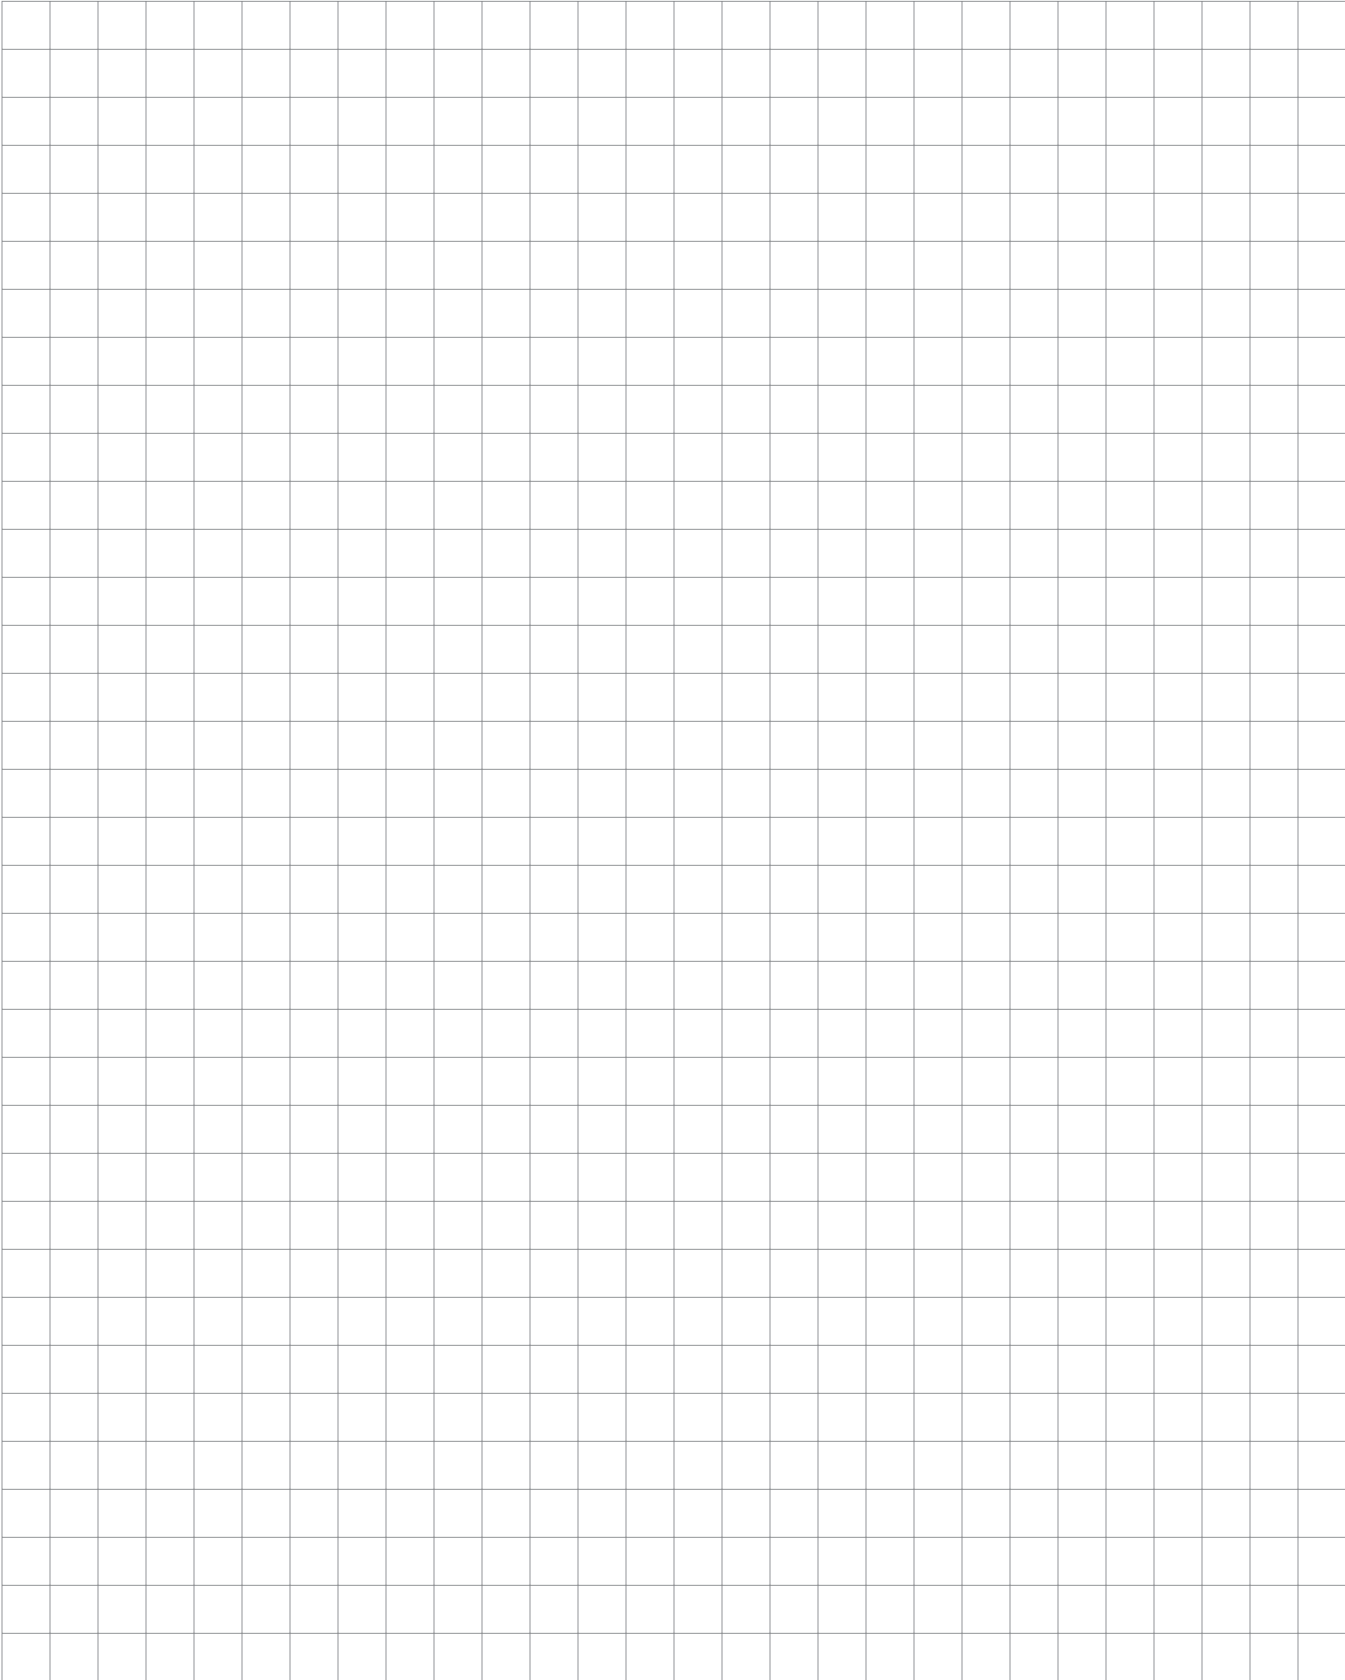



CONTACT US

ADDRESS

9221 Edison
Montreal, Quebec,
H1J 1T4, Canada

FAX

1.514.903.0649

EMAIL

info@lumentruss.com

PHONE

1.855.384.3384

WEBSITE

www.lumentruss.com



MADE IN
NORTH AMERICA

LUMEN™
Truss