

8800

8000 SERIES

LUMEN™  
Truss




# 8800 PROFILE

8000 Series



## Cross-section dimensions:



This new profile design will offer you a wide choice of optics, thanks to the development of various lens that will allow you to customize the light projection angle. In addition, its unique hardware will allow you to adjust the direction of your fixture to your needs, even after installation is complete.

## FEATURES

- Hardware specially developed to allow you to rotate the luminaire and guide the light source according to the circumstances.
- Can be used with a concave diffuser designed to hide the light source while maintaining the profile to the foreground.
- The combination of various lenses will offer a lighting distribution customized to your needs.
- Straight and clean lines will give a modern look to your decor.
- Optics available: Prime, Optiflex & concave diffuser.
- Designed to meet North American woodworking standards.

## OPTIONS





















## LED ENGINE COMPATIBILITY

Compatible with LED engines and PCBs up to **33mm** wide.

## WEIGHT

0.563 lbs/ft, 0.8378 kg/m, without lenses.



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 <p>8800 - Profile, Alu</p>	 <p>PR - Prime flat lens</p>	 <p>SW - Swivel bracket kit</p>	<p><b>NOTE:</b> Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	 <p>HER - High efficiency reflector</p>	<p>Custom length by sections of 2 to 240"</p> <p>Swivel maximum length = 96"</p>
 <p>8801 - Profile, Black</p>	 <p>OX - Optiflex flat lens</p>	 <p>Type B dbl. chann. susp. kit with 15ft. aircraft cable SUS - 8800 suspension kit</p>	 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	 <p>NO - No option</p>	
 <p>8802 - Profile, White</p>	 <p>OP - Opal flat lens</p>	 <p>Loop swivel bracket SWRD - Red SWPK - Pink SWCY - Cyan SWBK - Black SWBL - Blue SWWH - White SWGR - Green SWTR - Transparent SWOR - Orange</p>	 <p>Integrated driver &amp; suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>		
 <p>880X - Profile, Custom color <b>IMPORTANT:</b> Give RAL color No See Appendix 1 on page 158</p>	 <p>OXC - Optiflex concave lens</p>	 <p>NO - No mounting hardware</p>	 <p>NO - No canopy</p>		
RAL NUMBER					
PROFILE	LENS	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH


8000

COLOR TEMPERATURE	LUMEN PACKAGE**	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p> <p>WD1 - WarmDim 14W</p> <p>WD2 - WarmDim 17W</p> <p>TW1 - Tunable White 11W</p> <p>TW2 - Tunable White 19W</p> <p>RGB1 - RGB 14W</p> <p>RGB2 - RGB 19W</p> <p>RGBW1 - 3000K</p> <p>RGBW2 - 3000K 4in1</p>	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LP4 - 400 LM / 5.8W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p><b>Note:</b> Not applicable for Warmdim Tunable White &amp; RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>SUS - Coaxial wire 15 FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location</p> <p><b>Note:</b> LHP is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC***</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>* Double strip option cannot be used with the reflector.</p> <p>**The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>*** Only available in 96W - 24V Driver.</p>



SINGLE-STRIP 1 DOUBLE-STRIP 2\*    SINGLE-STRIP 1 DOUBLE-STRIP 2\*    LEAD IN    LEAD OUT    USAGE    POWER SUPPLY/CONTROL

# NOTES

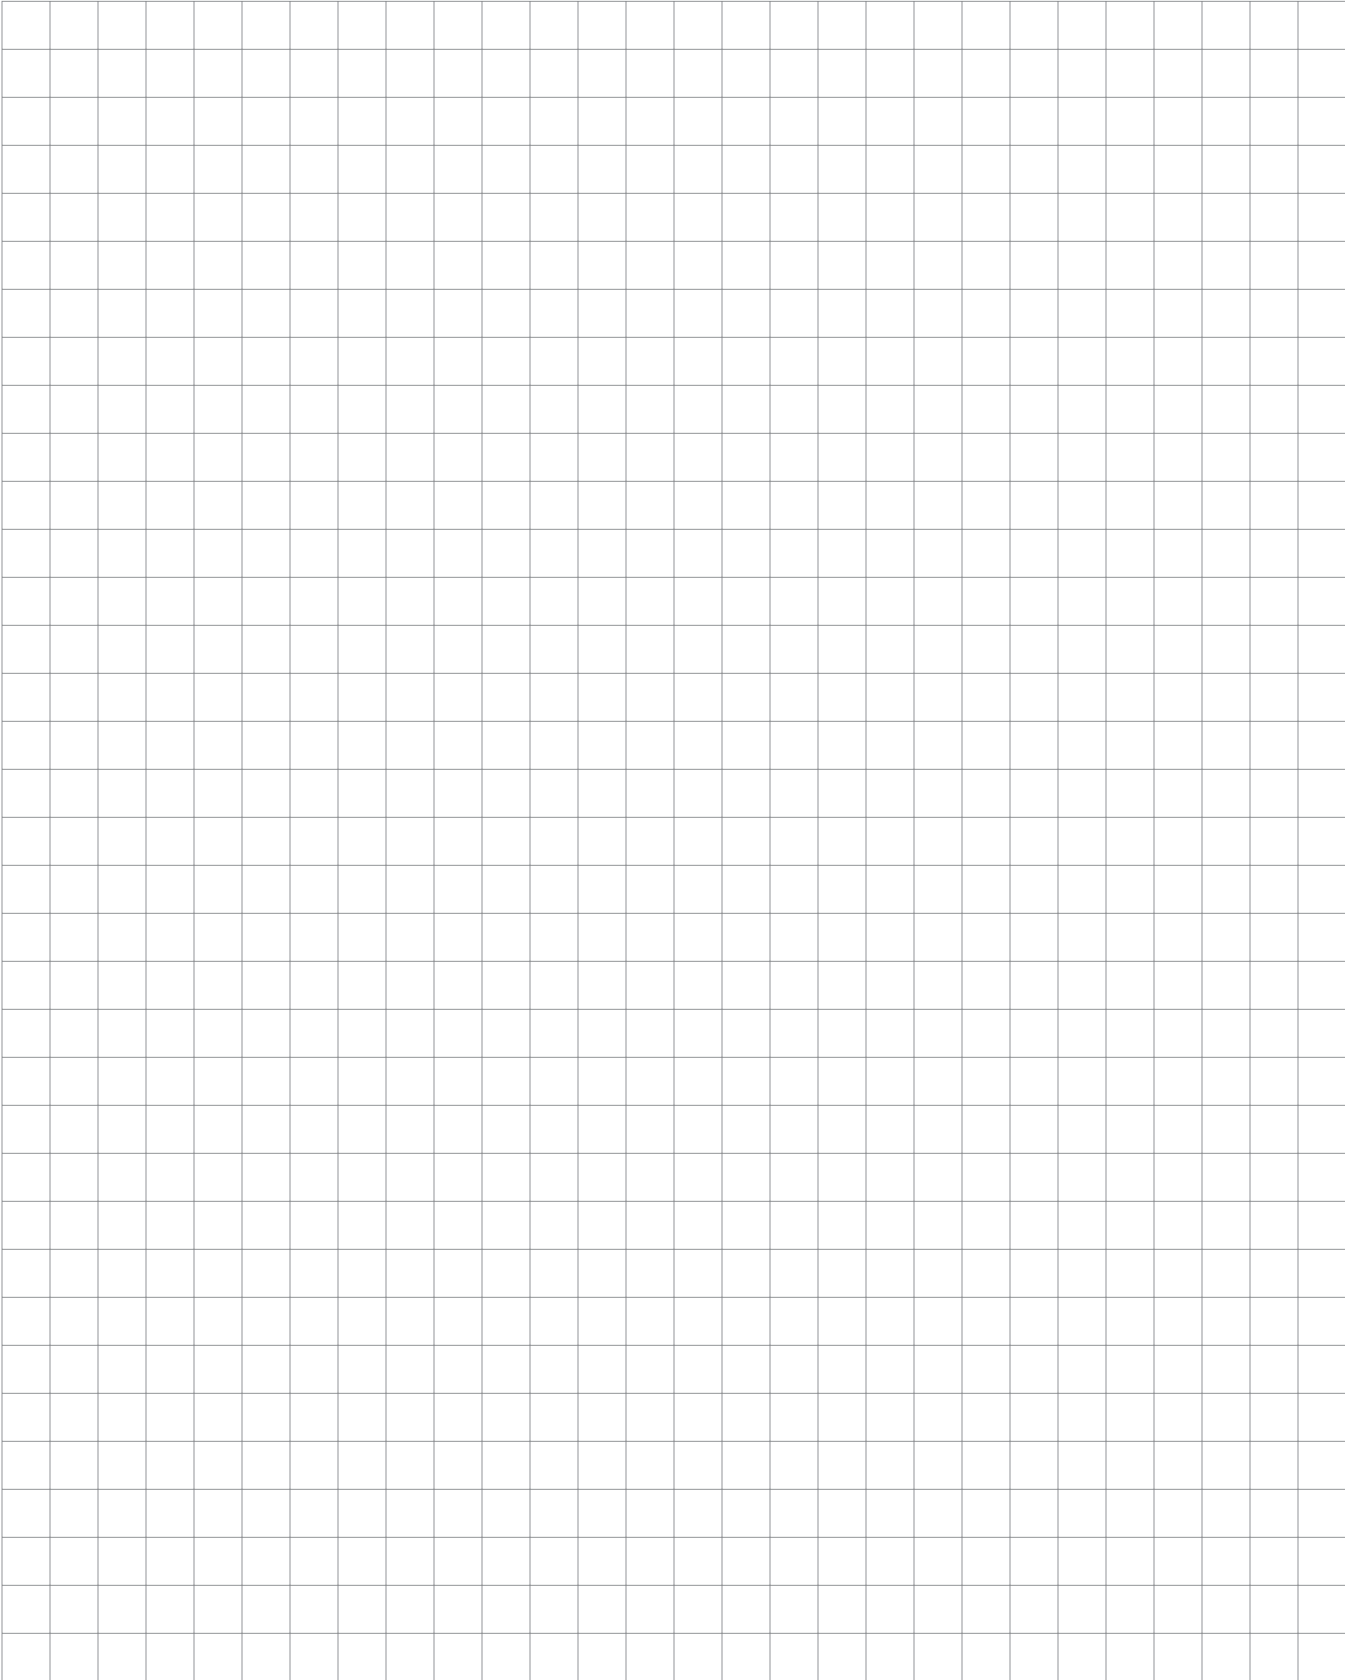



## CONTACT US

**ADDRESS**

9221 Edison  
Montreal, Quebec,  
H1J 1T4, Canada

**FAX**

1.514.903.0649

**EMAIL**

[info@lumentruss.com](mailto:info@lumentruss.com)

**PHONE**

1.855.384.3384

**WEBSITE**

[www.lumentruss.com](http://www.lumentruss.com)



**MADE IN  
NORTH AMERICA**

**LUMEN™  
Truss**