


# 9400 PROFILE

9000 Series



## Cross-section dimensions:



The **9400 profile** with its twin mounting channels allows for a **wide range of installation options**. Whether on swivel arms, on a surface, or suspended, it can be built in complex spatial configurations using **corner joiners**. Its rugged build in 6063-T5 aluminum alloy will withstand abuse in demanding applications and extreme weather, all of it with an understated elegance.

## FEATURES

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heatsink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has 3 application guides for 10mm (3/8-inch) wide LED engines.
- Designed to give a uniform light without hot spots.
- Its mounting channels make it compatible with a wide range of installation accessories.

## OPTIONS




## LED ENGINE COMPATIBILITY

Compatible with LED engines and PCBs up to **33mm** wide.







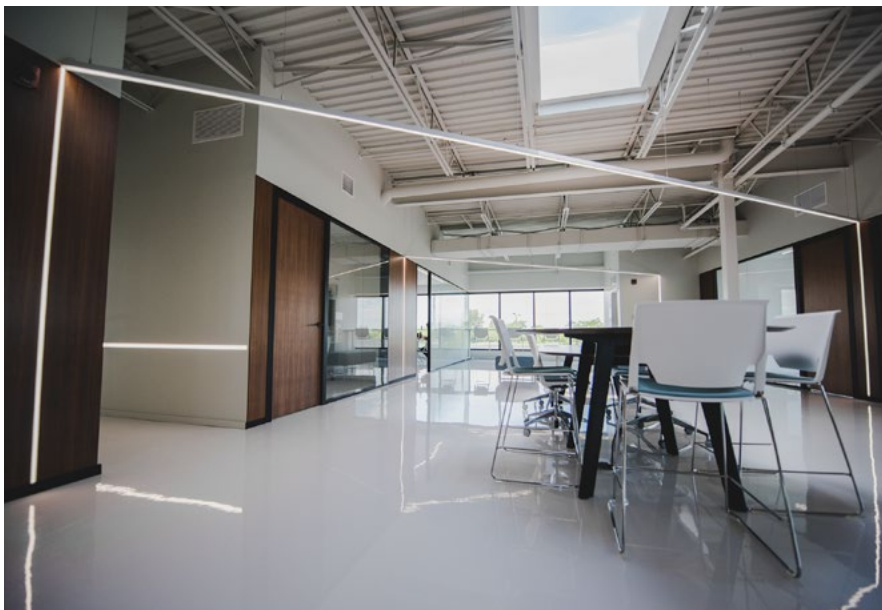

















## LINEAR WEIGHT

0.697 lbs/ft, 1.038 kg/m (without lens or insert)



# 9400 Profile ordering sheet

# 9000 Series

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 <p>9400 - Profile, Alu</p>	 <p>CL - Clear lens</p>	 <p>CLIP - Clip-in Bracket</p> <p>Surface 2-side bracket S20 - Alu S21 - Black S22 - White</p>	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	 <p>HER - High efficiency reflector</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
 <p>9401 - Profile, Black</p>	 <p>OX - Optiflex lens</p>	 <p>Surface 1-side bracket S10 - Alu S11 - Black S12 - White</p>	 <p>Integrated driver in canopy See Appendix 2 on page 158 C10 - Alu C11 - Black C12 - White</p>	 <p>NO - No option</p>	
 <p>9402 - Profile, White</p>	 <p>OP - Opal Lens</p>	 <p>Surface 90-deg. bracket S30 - Alu S31 - Black S32 - White</p>	 <p>Integrated driver &amp; suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>		
 <p>940X - 9400 Profile, custom color</p> <p>IMPORTANT: Give RAL color № See Appendix 1 on page 158</p>	 <p>PR - Prime Lens</p>	 <p>Swivel wall bracket SW0 - Alu SW1 - Black SW2 - White</p>			
<p>RAL NUMBER</p>	 <p>FO - Focus lens</p>	 <p>Swivel sign arm, 6° offset SA60 - Alu SA61 - Black SA62 - White</p>	 <p>NO - No canopy</p>		
	 <p>NO - No lens</p>	 <p>Swivel sign arm, 18° offset SA180 - Alu SA181 - Black SA182 - White</p>			
		 <p>Type B dbl, chann. susp. kit with 15ft. aircraft cable SUS0 - Alu SUS1 - Black SUS2 - White</p>	 <p>NO - No mounting hardware</p>		

COLOR TEMPERATURE	LUMEN PACKAGE**	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p> <p>WD1 - WarmDim 14W</p> <p>WD2 - WarmDim 17W</p> <p>TW1 - Tunable White 11W</p> <p>TW2 - Tunable White 19W</p> <p>RGB1 - RGB 14W</p> <p>RGB2 - RGB 19W</p> <p>RGBW1 - 3000K</p> <p>RGBW2 - 3000K 4in1</p>	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LP4 - 400 LM / 5.8W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim, Tunable White &amp; RGB color temperatures</p>	<p>HW3 - Hardware 3 FT</p> <p>HW6 - Hardware 6 FT</p> <p>HW9 - Hardware 9 FT</p> <p>HWX - Hardware custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>SUS - Coaxial wire 15 FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location</p> <p>Note: LHP is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC***</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>* Double strip option cannot be used with the reflector.</p> <p>**The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>*** Only available in 96W - 24V Driver.</p>

SINGLE-STRIP 1 DOUBLE-STRIP 2\*


SINGLE STRIP DOUBLE STRIP

LEAD IN LEAD OUT


USAGE

POWER SUPPLY/CONTROL

Serie 9400 (9400) LM22950-30

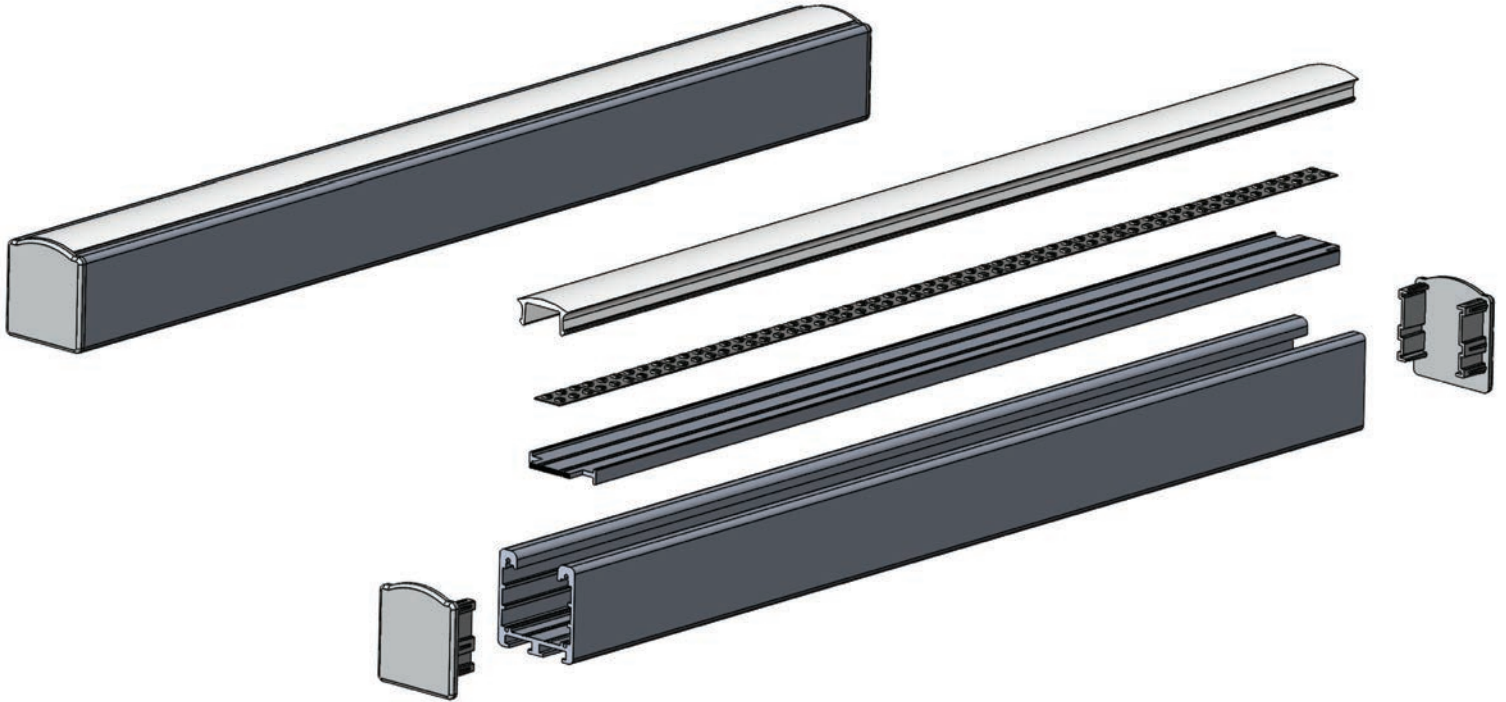

ASSEMBLY DIMENSION / DIMENSION D'ASSEMBLAGE

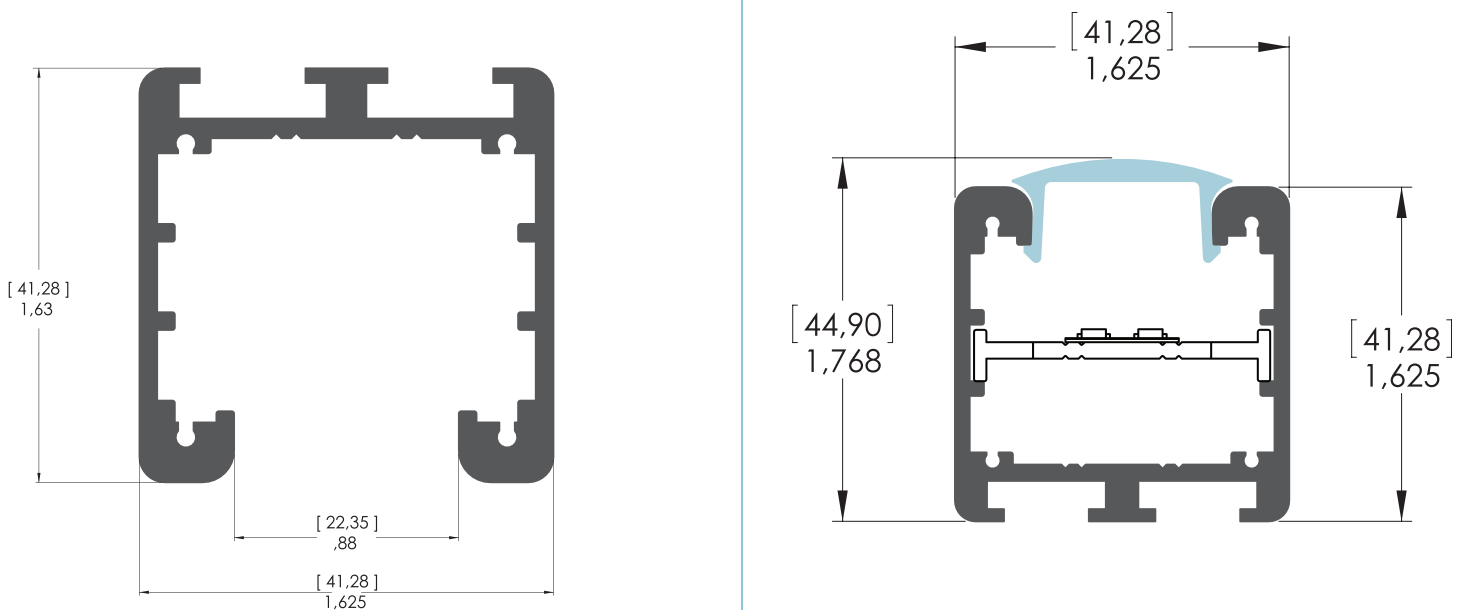

[ mm ]  
inches/pouces

# NOTES

