



9500 Profile

9500 (LM22950-40)

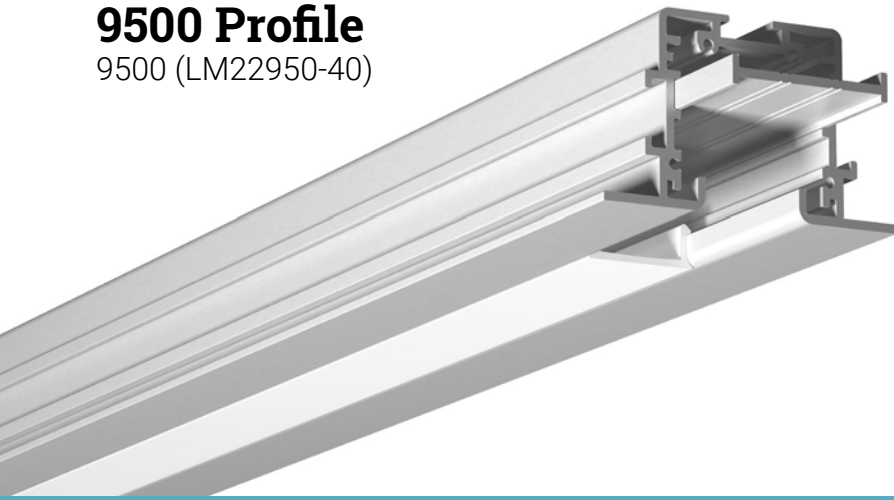

9000 Series

Cross-section dimensions:



Commercial-grade recessed linear lighting is made easy with the use of the **9500 profile**. A powerful and highly customizable light output, paired with a rugged construction in the 6063-T5 aluminum alloy, is in contrast with the discreet visual imprint of its flat, almost-zero surface offset. Designed for suspended and plasterboard ceilings and walls, it can also be painted to organically blend in any interior.

Features

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heatsink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has 3 application guides for 10mm (3/8-inch) wide LED strips.
- Designed to give a uniform light without hot spots when using an opal lens and a strip of 72 LEDs per meter or more.
- Designed for a flush recessed installation in suspended and gypsum panel ceilings.
- Its mounting channels make it compatible with a wide range of installation accessories.
- Designed to be used with flat lenses for an almost-zero surface offset.

Options



LED strip compatibility

Compatible with LED strips and PCBs up to **33mm** wide.

Linear weight
















0.897 lbs/ft, 1.335 kg/m (without lens or insert)



9500 Profile
















Components and accessories

9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 9500 Profile 9500 (LM22950-40)	 Flat Clear 9557 (LM22960-71)	 Standard 9500 Alu 9570 (LM22970-41)	 T-bar suspension bracket 9574 (LM22970-51)	 Rail Insert 1.4 in. (37mm) 9000 (LM22954-99)	Custom length by sections of 6 to 240 inches (6m).
	 Flat Optiflex 9551 (LM22960-72)	 T-bar 9500 Alu 9572 (LM22970-47)	 Type B seismic kit 9983 (LM22320-05)	 Type B straight joiner 1325 (LM22335-01)	
	 Flat Opal 9553 (LM22960-73)			 Type B horz. 45°/135° joiner 1328 (LM22335-07)	
				 Type B horz. 90° joiner 1326 (LM22335-03)	
				 Type B vert. 90° joiner 1327 (LM22335-05)	
				 Type B vert. 45°/135° joiner 1330 (LM22335-06)	
				 Type B wire cover 8099 (LM22335-99)	

9500					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH

Lumen package

LUMEN PACKAGE*	COLOR TEMPERATURE	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	NOTES
<ul style="list-style-type: none">  255 lm/ft, flex. 5/16" wide 12/24V Constant Voltage LP3528120  308 lm/ft, flex. 5/16" wide 24V Constant Voltage LP3528180  462 lm/ft, flex. 9/16" wide 24V Constant Voltage LP3528240  650 lm/ft, rigid 1/2" wide, 350/700mA Constant Current LP573052** 	<ul style="list-style-type: none">  Candle White 2400K  Soft White 2700K  Warm White 3000K  Bright White 3500K  Neutral White 4200K 	<p>Please specify the needed DC wire length (include units).</p>	<ul style="list-style-type: none">  IP22 Indoor, dry (IP22)  IP68 Indoor, wet (IP68)  IP68+ Outdoor, weatherproof (IP68, NMMWJ, UV-resistant) 	<ul style="list-style-type: none">  Non-dimmable NO  ELV dimming ELV  0-10V dimming 0-10V 	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in CCTs of 3000K and 4200K, IP22, and lengths of 1/2/3/4/5/6/8 feet.</p>
LUMEN PACKAGE	COLOR TEMPERATURE (CCT)	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	

Notes

