



GTRAXX

Gypsum Series

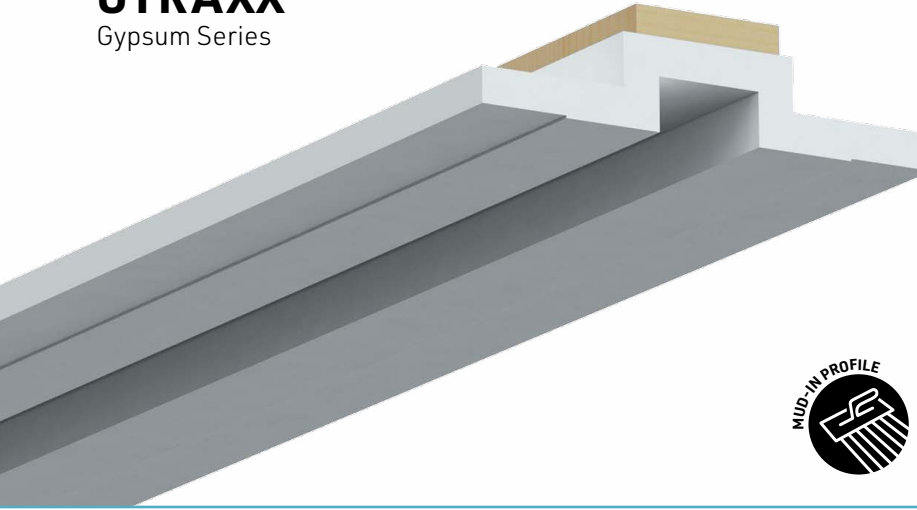

Cross-section dimensions:

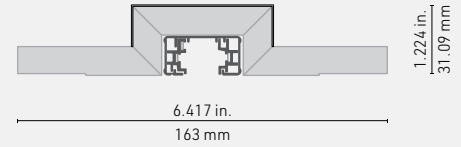


Combining drywall panels with our TRAXX series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.


FEATURES

- Class A fire protection grade material
- Modl compatible with TRAXX series
- Panel thickness 1/2in allows for flush installation with standard 1/2in. gypsum panels, or level with drywall mud to match seamlessly with 5/8in. panels.
- 5/8in thick panels available for special order*.
- Shipped in straight sections of 4 feet (1.22m).
- 8 feet sections available for special order*.

* For special orders pricing and shipping contact your sales representative.



installation video

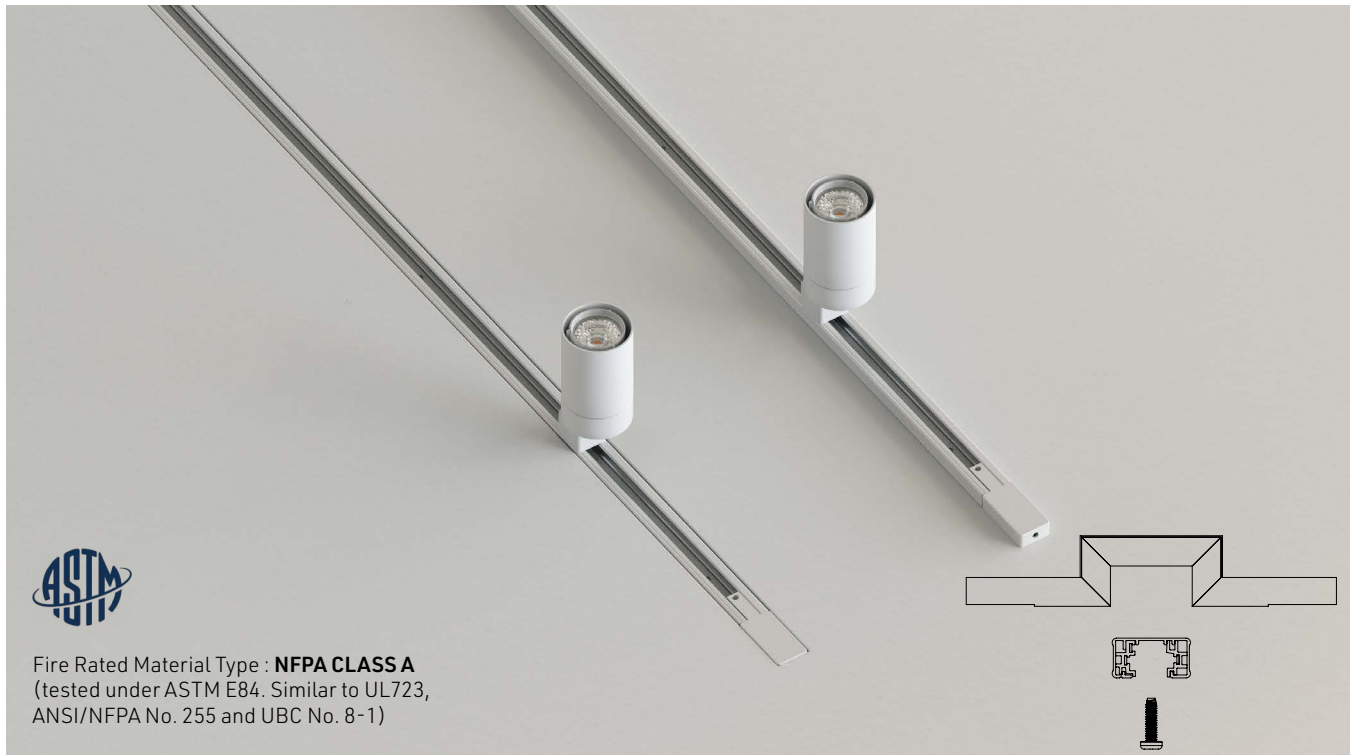

Fire Rated Material Type : **NFPA CLASS A**
(tested under ASTM E84. Similar to UL723,
ANSI/NFPA No. 255 and UBC No. 8-1)


TRAXX SPOTLIGHT

Track light system




Cross-section dimensions:

15W

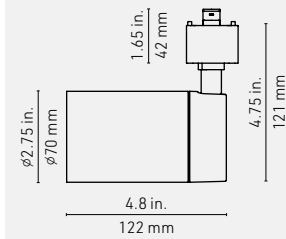


8W

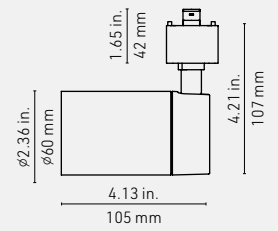

Elegant and powerful, the TRAXX track light system from LumenTruss™ enhances the decorative elements or products you want to highlight. With its interchangeable heads providing 3 projection angles and a choice of 4 color temperatures, this track-mounted spotlight is ideal for high-end applications. Its modular design, removable and tool-free, makes it an exceptionally versatile LED spotlight.

FEATURES



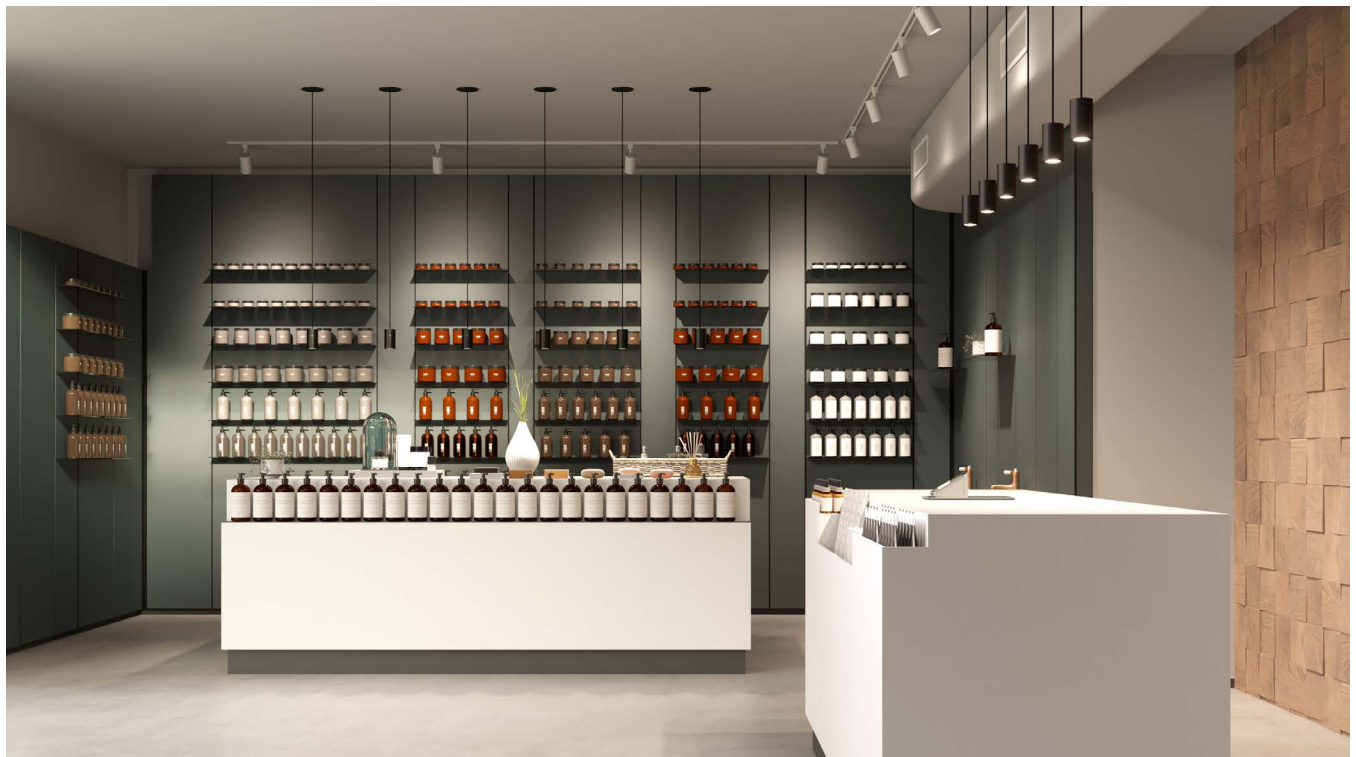






- Lumen output 1200lm - 4000K (15W) / 465lm - 4000K (8W)
- 8W & 15 W, 120V, 50,000 hours
- Interchangeable projection angles : 15°, 38° and 60°
- Four color temperatures to choose from: 2700K, 3000K, 3500K and 4000K
- CAMETA anti-glare design with protective angle to reduce glare
- Can be used with most dimmers with variable intensity
- Integral regulators, isolated circuit
- Passive cooling achieved through innovative thermal design
- Rotation 350° (horizontal), adjustable to 90° (vertical)
- Compatible with Type J, Type H, and Type L.
- CRI of 95+
































GTRAXX + TRAXX ordering sheet

Gypsum grooves

SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	BASE CONNECTOR	QUANTITY
	8 8W 15 15W	27 - 2700K  (special order)* 30 - 3000K  (in stock) 35 - 3500K  (special order)* 40 - 4000K  (in stock)	15 - 15 degrees  38 - 38 degrees  60 - 60 degrees 	TJ - Type J TH - Type H TL - Type L	
		<i>*Delivery times will be longer for special orders.</i>			
SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	BASE CONNECTOR	QUANTITY
SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	BASE CONNECTOR	QUANTITY

TRACK COLOR	TRACK TYPE	QUANTITY	ACCESSORIES	COLOR	QUANTITY
 Black	 Track type H, 8 feet, black LM55000-1  Track type H, 4 feet, black LM55000-11		 Joiner connector	Black LM55002-1  White LM55002 	
 White	 Track type H, 8 feet, white LM55000  Track type H, 4 feet, white LM55000-10		 L Connector	Black LM55003-1  White LM55003 	
	GYPSUM GROOVE*	QUANTITY	 T Connector	Black LM55004  White LM55004 	
 GTRAXX Gypsum groove 1/2", 4'	*NOTES - For custom orders of 5/8" thick or 8' long sections contact your representative - See Appendix 2 on page 73 to see how to calculate ordering length		 Endcap for Track	Black LM55005-1  White LM55005 	
			 Live End Connector	Black LM55001-1  White LM55001 	
			 Floating Canopy	Black LM55014-1  White LM55014 	
			 Monopoint Canopy	Black LM55015-1  White LM55015 