


# LUXSLEEVE PROFILE

PVC Series



## Cross-section dimensions:

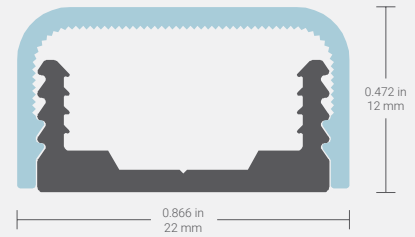

Looking for mood light without breaking the bank? This PVC extrusion sleeve allows for better light diffusion while being the most economical option for our LuxLine series. Available in 4', you can easily cut it to design ambient light in so many ways. Making dark spaces more inviting has never been so easy.

## FEATURES

- Simple and lightweight extrusion made of durable PVC material
- Economical and long lasting
- Two lens options available: Prime or Clear
- Fine grooves on the inner surface of the lens provide even and effective light distribution
- Wide variety of color temperatures available (2400 - 4000K)
- Perfect solution for accent lighting
- Grooves on the extrusion surface provide perfect grip for our LuxLine 120V LED tape
- Easy to cut and install, no mounting brackets required
- Available in straight sections of 4' (1.2m)



## LED ENGINE COMPATIBILITY

Compatible with LuxLine 120V LED engines.




## LINEAR WEIGHT

0.1 lbs/ft, 0.16 kg/m (with lens)

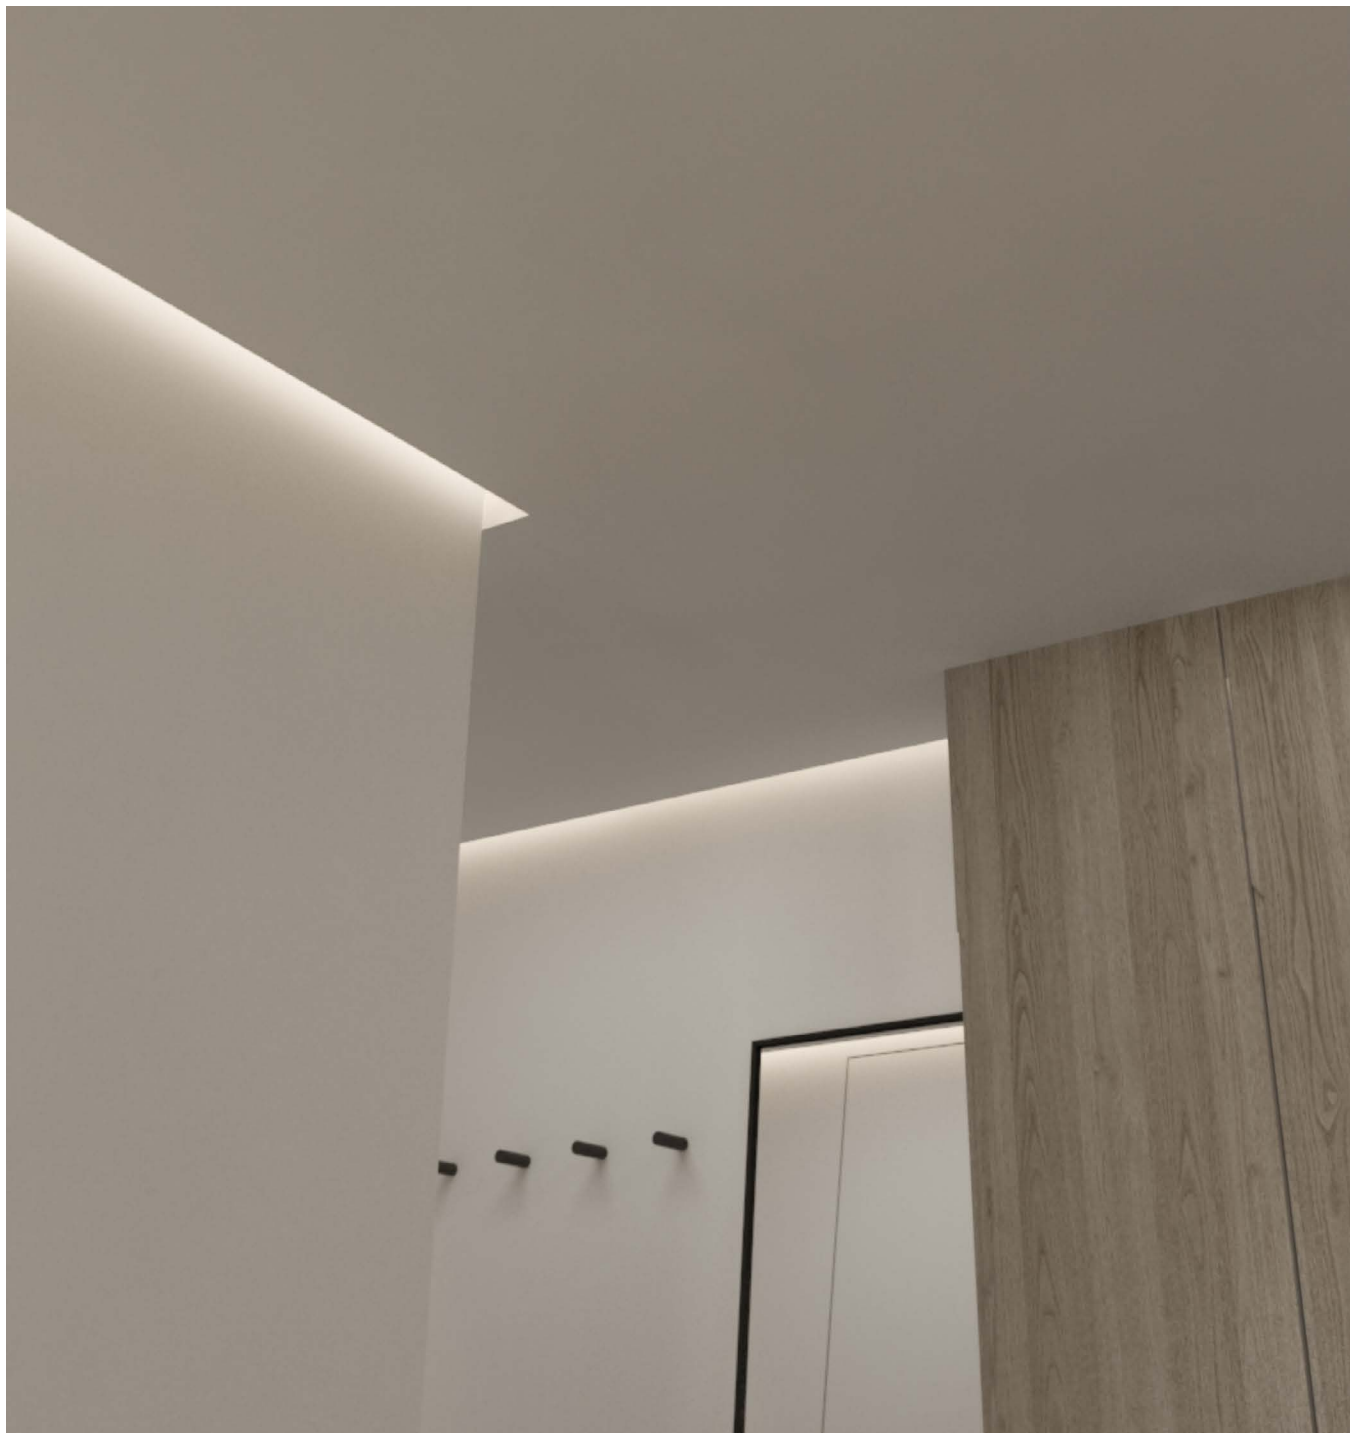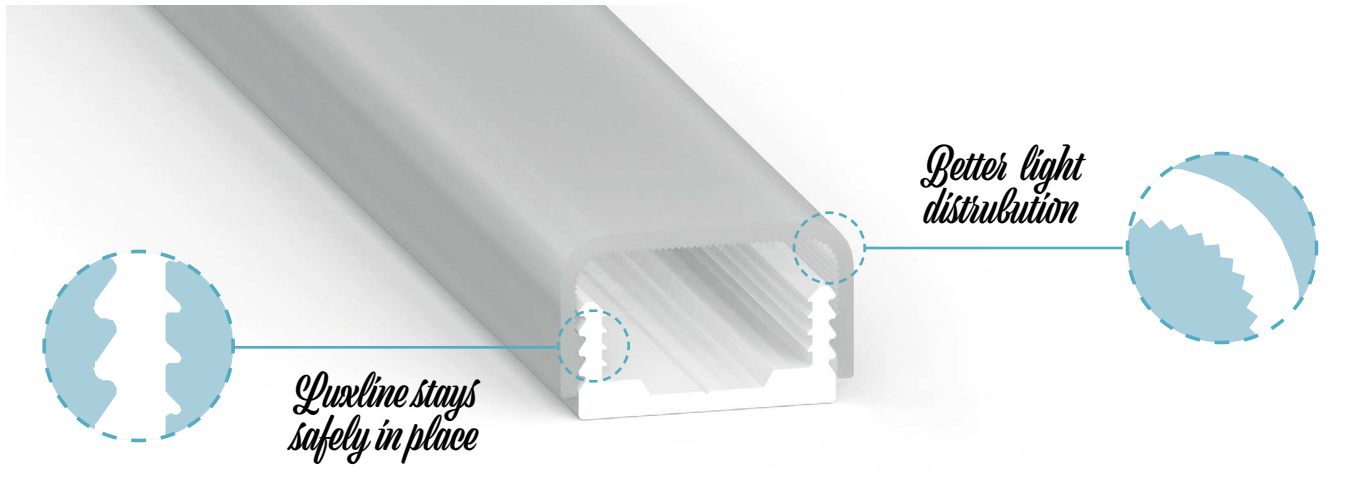










LENSES	PROFILE	LENGTH
 <p>LSPR - Prime lens</p>	 <p>LuxSleeve, PVC Series, white</p> <p><b>INCLUDED</b></p>	<p>Available in straight section of 4 feet (48 inches/1.2 m). *Cut on site</p>
 <p>LSCL - Clear lens</p>		

LENS	-	QUANTITY	X	<b>48 INCHES</b>	LENGTH
------	---	----------	---	------------------	--------

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	JUMPER	USAGE	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4000K	LUX - 350 LM / 4.0W FT / 90+CRI	PG - Plug-in 47" HW - Hardwire 118"	JP6 - Jumper 6" JP12 - Jumper 12" NO - No jumper	2 - IP65 indoor	The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.  <div style="border: 1px solid gray; padding: 2px; display: inline-block;">                         TITLE  <b>24</b>  <small>(Lumen/ft)</small> </div>


COLOR TEMPERATURE CCT	-	<b>LUX</b>	-	LEAD IN	LEAD OUT	-	JUMPER	QTY	-	<b>IP65</b>
-----------------------	---	------------	---	---------	----------	---	--------	-----	---	-------------

### LUXLINE FEATURES

- LumenTruss Driverless technology.
- Direct line voltage.
- Constant current IC providing uniform intensity over the entire run.
- Uses North American power plug with built-in fuse or hardwire.
- Order in lengths of 1 FT.
- 164 FT maximum run.
- Ultra high lumen output.
- Architectural grade.
- PVC coating (not recommended for direct sunlight).
- 3 year warranty.
- Life of 50,000 hours
- LED type: 3056
- WARNING: Do not cut AC plug.

### LUXLINE FEATURES

Plug-in Connection Diagram



Hardwire Connection Diagram

**With the NEW revolutionary hardwire connection with built-in fuse! Exclusive to LumenTruss.**

