


LED ENGINE

# NEON SLEEVE SERIES

Highly durable, flexible,  
Uniform pixel free light!

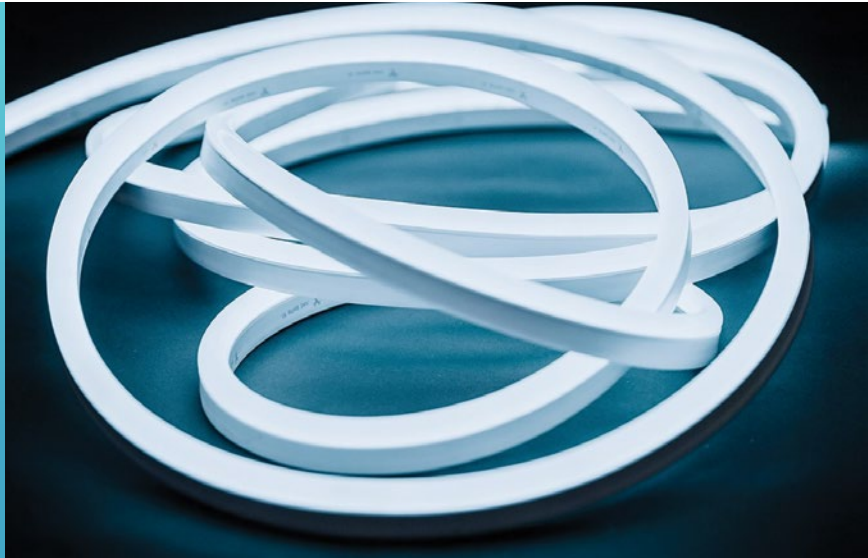

## NEON SLEEVES FEATURES

- Attractive modern look for wide variety of applications.
- Silicone material, resistant to yellowing and high temperature, can be used outdoors.
- Soft, flexible.
- Easy modeling and tensile resistance.
- Professional structure design.
- Uniform light, no spots.
- Consistent color temperature.

## COMPATIBLE WITH

### Color Temperature:

2400K, 2700K, 3000K, 3500K, 4200K, 6200K

### Lumen Package:

LP0: 128 LM / 1.5W FT / 90+CRI

LP1: 160 LM / 1.5W FT / 90+CRI


LP2: 255 LM / 3.0W FT / 90+CRI

LP3: 308 LM / 4.5W FT / 90+CRI


LP4: 400 LM / 5.8W FT / 90+CRI

LHP: 700LM / 7.0W FT / 95+ CRI


## FIVE DIFFERENT MODELS




Mini Side Flex




340 Flex



180 Flex



3D Flex



Top View Flex

SLEEVE TYPE	BRACKET	LENGTH	CCT	LUMEN PACKAGE	LEAD IN / OUT	USAGE	POWER SUPPLY TYPE
<b>MSF</b> - Mini Side Flex <b>TOPF</b> - Top View Flex <b>3DF</b> - 3D Flex <b>180F</b> - 180 Flex <b>340F*</b> - 340 Flex  Note: 340F sleeve is only available with: - LP1 Lumen Package 27 and 30 CCTs - LP3 Lumen Package 30, 35, 42, and 62 CCTs	<b>FL</b> - Flat bracket	<b>Total length in inches</b> Max. length = 196in (5m) per driver	 <b>WD</b> - WarmDim <b>RGB</b> - RGB <b>RGBW</b> - RGBW	<b>LP0</b> - 128 LM/1.5W FT/90+CRI <b>LP1</b> - 160 LM/1.5W FT/90+CRI <b>LP2</b> - 255 LM/3.0W FT/90+CRI <b>LP3</b> - 308 LM/4.5W FT/90+CRI <b>LP4</b> - 400 LM/5.8W FT/90+CRI <b>LHP</b> - 700 LM/7.0W FT/95+CRI  Note: Not applicable for WarmDim & RGB color temperatures  LP4 and LHP Lumen Package options are only available with TOPF sleeve.	<b>HW3F</b> - Hardwire 3ft, front <b>HW3S</b> - Hardwire 3ft, side <b>HW6F</b> - Hardwire 6ft, front <b>HW6S</b> - Hardwire 6ft, side <b>HW9F</b> - Hardwire 9ft, front <b>HW9S</b> - Hardwire 9ft, side <b>HWXF</b> - Hardwire N ft, front <b>HWXS</b> - Hardwire N ft, side <b>DC3F</b> - DC plug 3ft, front <b>DC3S</b> - DC plug 3ft, side <b>DC6F</b> - DC plug 6ft, front <b>DC6S</b> - DC plug 6ft, side <b>DC9F</b> - DC plug 9ft, front <b>DC9S</b> - DC plug 9ft, side <b>DCXF</b> - DC plug N ft, front <b>DCXS</b> - DC plug N ft, side	<b>I</b> - IP65 dry and damp locations	<b>A</b> - No dimming <b>B</b> - ELV dimming 120VAC <b>C</b> - ELV dimming 120/277VAC <b>D</b> - 0/10V dimming 120/277VAC <b>E</b> - No dimming DC plug in <b>NO</b> - No driver
SLEEVE TYPE	MOUNTING HARDWARE	LENGTH	COLOUR TEMP.	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY TYPE

\*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors