

LED ENGINE

NEON FLEX

Fully dimmable, highly durable, flexible & pixel free







The Neon Flex Topview is designed for indoor architectural projects in commercial installations such as shopping centres, hotels, restaurants and many other applications. Side view can be flexed "up & down" with a maximum radius of 5 in.

NEON FLEX FEATURES


- Forward Voltage 24VDC
- Forward Current 183mA/ft
- LED Density 73 LED/ft
- Power <4.4W/ft
- Width 0.375 in
- Thickness 0.375 in
- Length 196 in (16.4 ft)
- Min. Bending Diameter 5 in
- Can Be Cut Anywhere
- IP Grade IP65
- CRI 90+



NEON SLEEVE	COLOR TEMPERATURE	LENGTH
NF - Neon Flex	 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K	Total length in inches
NF		
NEON FLEX	COLOR TEMPERATURE CCT	LENGTH (inches)

GENERAL PRODUCT PARAMETERS


Forward Voltage	24VDC
Forward Current	183mA/ft
LED Density	73 LED/ft
Power	<4.4W/ft
Width	0.375 inches
Thickness	0.375 inches
Length	196 in (16.4 ft)
Min. Bending Diameter	5 inches
Can Be Cut	Anywhere
IP Grade	IP65
CRI	90+

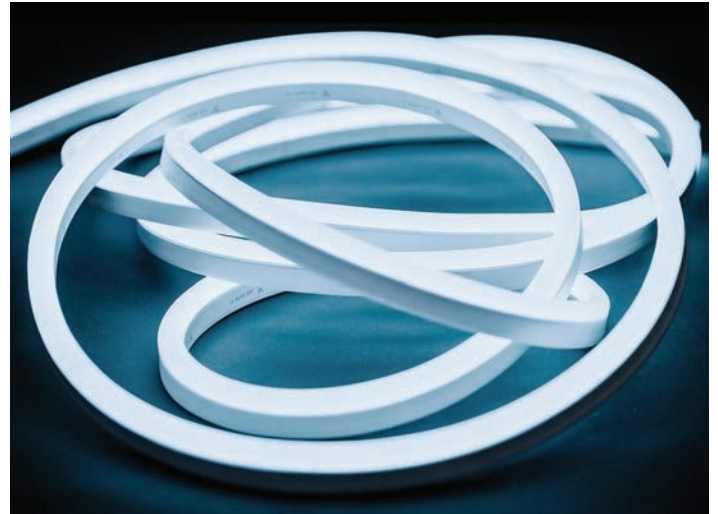

UV Resistant



Beam Angle



Min. Bending Ø




Watersplash Resistant



PRODUCT RANGE


MODEL NUMBER	CCT	LIGHT COLOR	LUMENS
B3528-NEONTOPVIEW-24V-240-9,4MM-14.5W-2400K-IP65	2400K	Soft White	262lm/ft
B3528-NEONTOPVIEW-24V-240-9,4MM-14.5W-2700K-IP65	2700K	Warm White	262lm/ft
B3528-NEONTOPVIEW-24V-240-9,4MM-14.5W-3000K-IP65	3000K	Warm White	262lm/ft
B3528-NEONTOPVIEW-24V-240-9,4MM-14.5W-3500K-IP65	3500K	Bright White	274lm/ft
Neon TopView - Mounting Clip with screw			
Neon TopView - End Cap (White)			
Neon TopView - Connector + 15cm cable HW (White)			
Neon TopView - Jumper with 15cm cable (White)			

INSTALLATION

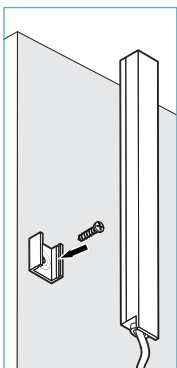


1

Fix the clips onto the wall

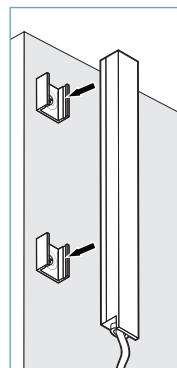

2

Push the neon light all the way into the clips

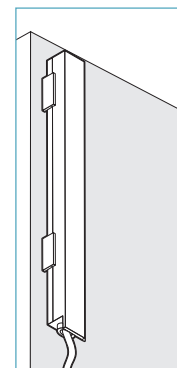

3

Check the polarity and connect cables to the power supply

NOTES

