

TRAXX PENDANT

TRACK LIGHT SYSTEM

LUMEN™
Truss




TRAXX PENDANT SPOTLIGHT

Track light system




Cross-section dimensions:

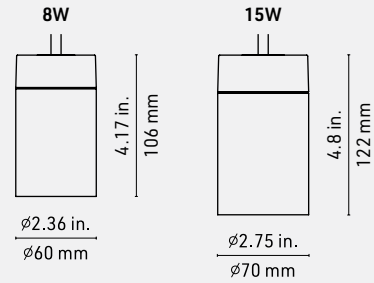

Elegant and powerful, the TRAXX pendant from LumenTruss™ enhances the decorative elements or products you want to highlight. With its interchangeable heads providing 3 projection angles and a choice of 4 color temperatures, this spotlight is ideal for high-end applications. Its modular design, removable and tool-free, makes it an exceptionally versatile LED spotlight.





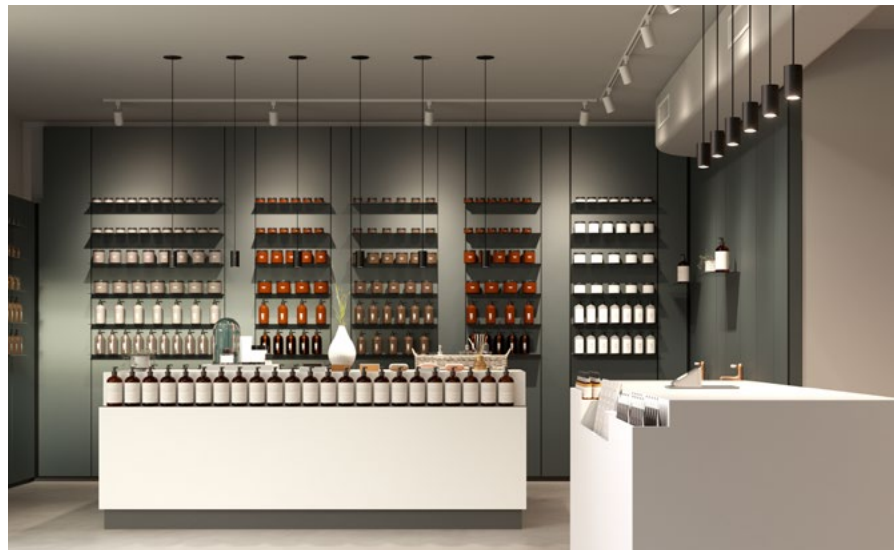




FEATURES

- Lumen output (15W) 1200lm - 4000K
- Lumen output (8W) 465lm - 4000K
- 8W & 15 W, 120V, 50,000 hours.
- interchangeable projection angles : 15°, 38° and 60°.
- Four color temperatures to choose from: 2700K, 3000K, 3500K and 4000K.
- With a CRI of 95+.
- CAMEA anti-glare design with protective angle to reduce glare.
- Can be used with most dimmers with variable intensity.
- Integral regulators, isolated circuit.
- Passive cooling achieved through innovative thermal design.








SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	PENDANT	QUANTITY
	8 8W/465lm 15 15W/1200lm	27 - 2700K  30 - 3000K  35 - 3500K  40 - 4000K 	15 - 15 degrees  38 - 38 degrees  60 - 60 degrees 	P - Pendant with canopy	
					

SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	P BASE CONNECTOR	QUANTITY
SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	P BASE CONNECTOR	QUANTITY
SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	P BASE CONNECTOR	QUANTITY
SPOTLIGHT COLOR	INPUT POWER	COLOR TEMPERATURE	BEAM ANGLE	P BASE CONNECTOR	QUANTITY

NOTES

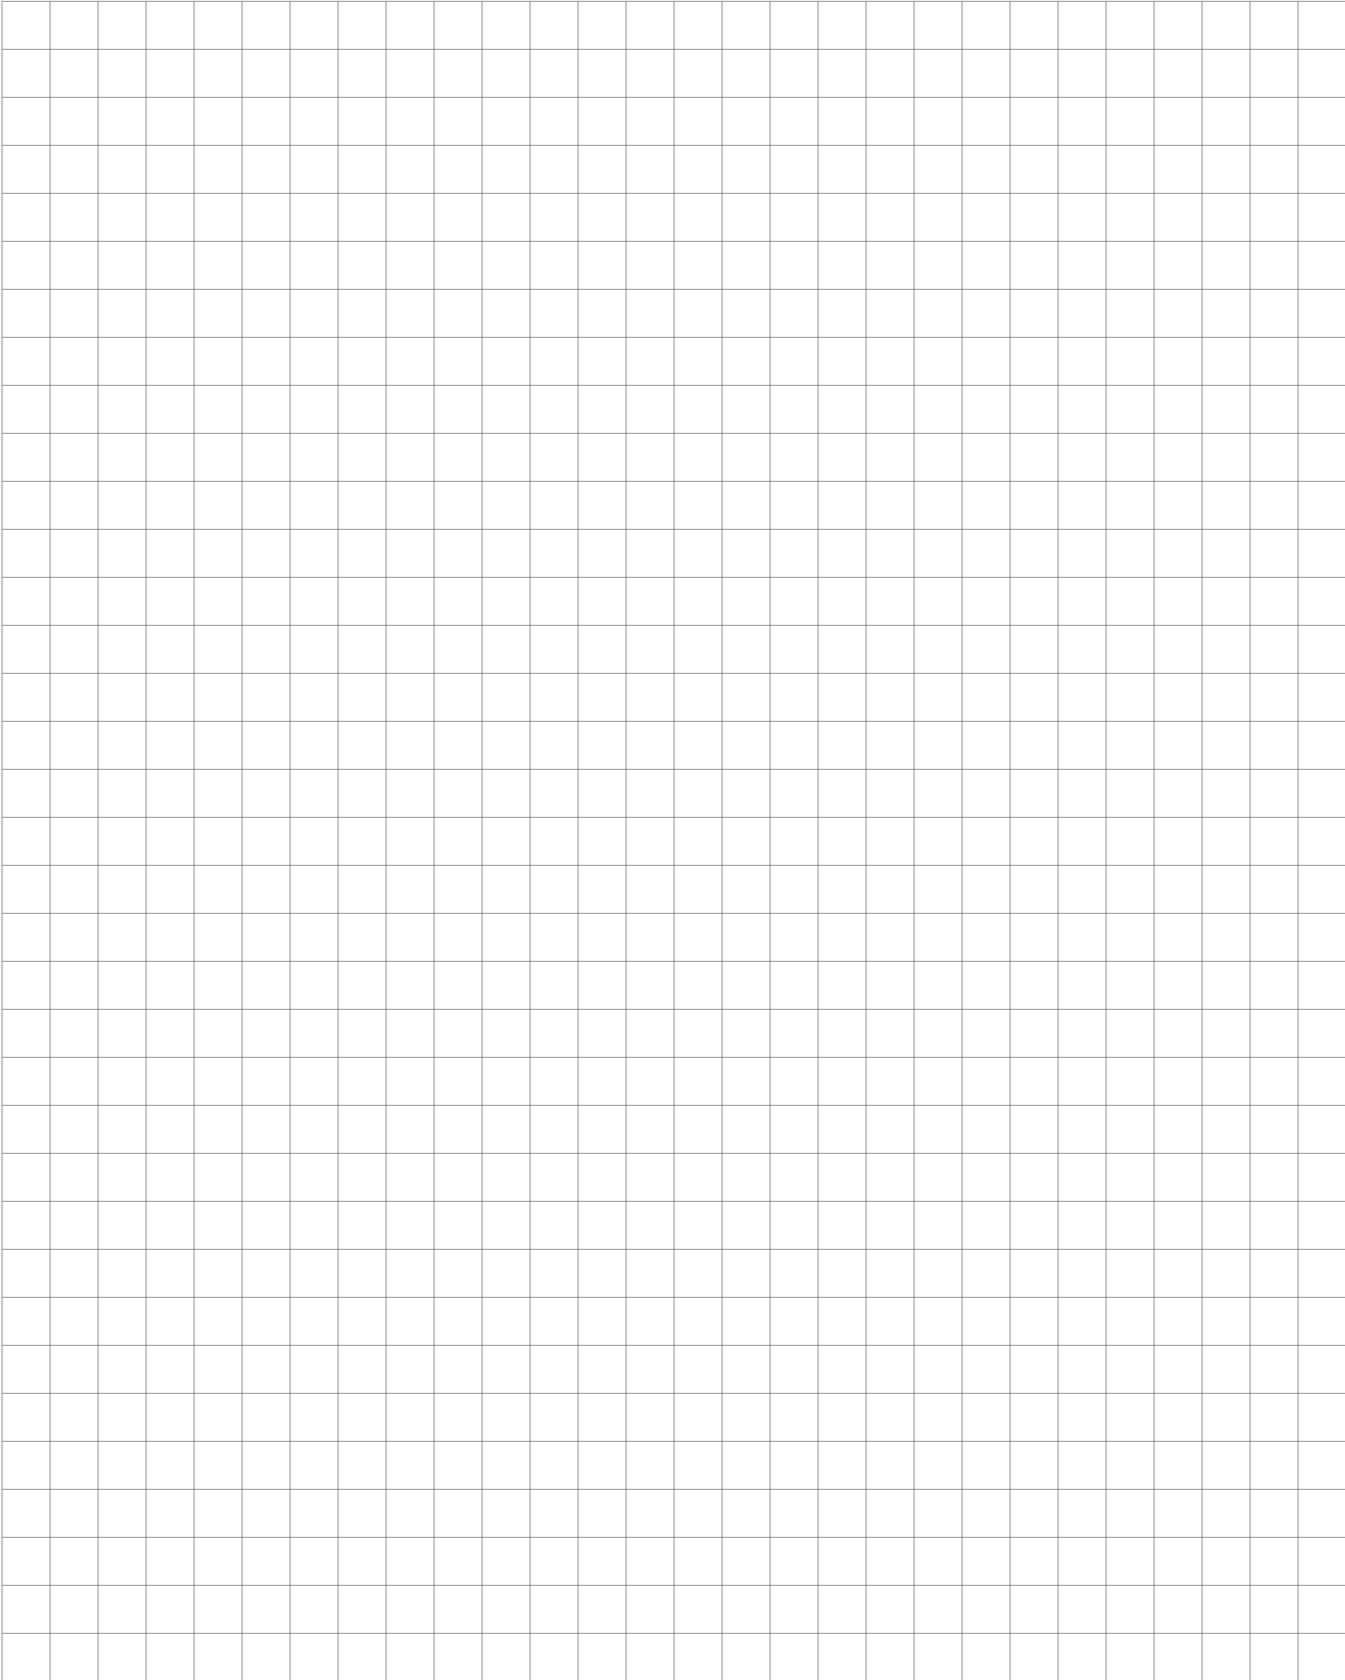



CONTACT US

ADDRESS

9221 Edison
Montreal, Quebec,
H1J 1T4, Canada

FAX

1.514.903.0649

EMAIL

info@lumentruss.com

PHONE

1.855.384.3384

WEBSITE

www.lumentruss.com



**MADE IN
NORTH AMERICA**

**LUMEN™
Truss**