


LUXLINE

DIY CUT & GO!

DISTRIBUTOR KIT

164 ft
148 ft
136 ft
124 ft
112 ft
100 ft
88 ft
72 ft
60 ft
48 ft
36 ft

LUXLINE CUT & GO - EASY, FAST AND SIMPLE!

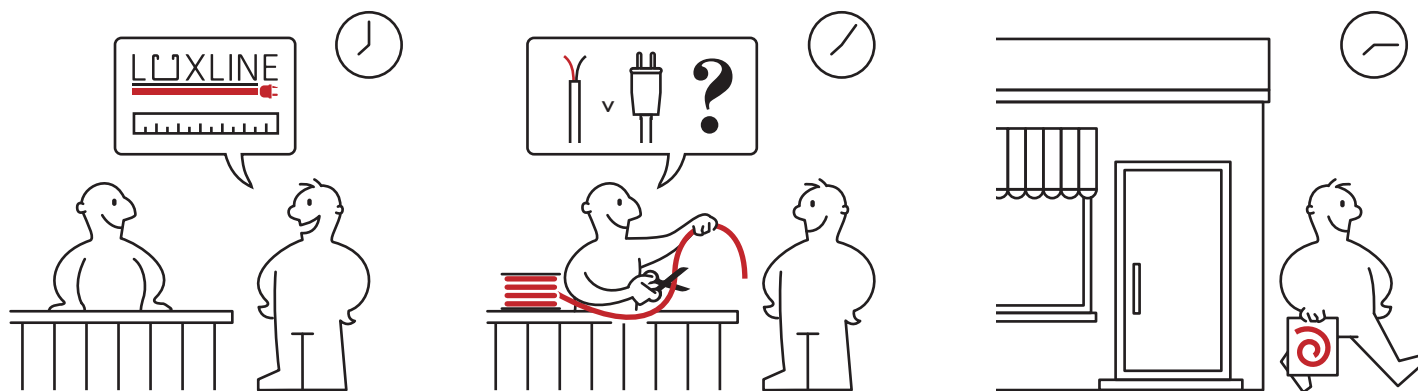

FEATURES

- LumenTruss LuxLine Driverless technology.
- Direct line voltage.
- Constant current IC providing uniform intensity over the entire run.
- Uses North American power plug with built-in fuse.
- Exclusive hardwire connection option with built-in fuse.
- 164 FT maximum run.
- Ultra high lumen output.
- 350 lumen/foot.
- Architectural grade.
- PVC coating (not recommended for direct sunlight).
- 3 year warranty.
- We recommend putting brackets every 6 inches.

⊕ LUXLINE DRIVERLESS TECHNOLOGY UP TO 164 LINEAR FT

**164 Ft
MAX**

120V
Plug & Play



















**115
LM/W**

**CUSTOM
LENGTHS**



LUMEN[®]
By **Truss**

LUXLINE STOCK ORDER PROGRAM!

PLATINUM With Free Shipping! <small>*Rebate equivalent to 40% of net distributor price</small> 40% Rebate	GOLD With Free Shipping! <small>*Rebate equivalent to 30% of net distributor price</small> 30% Rebate	SILVER <small>*Rebate equivalent to 20% of net distributor price</small> 20% Rebate
6 LUXLINE 164 FEET ROLLS  6 rolls (mix & match) 2400K LM28500-15 <input type="text"/> 2700K LM28500-25 <input type="text"/> 3000K LM28500-35 <input type="text"/> 3500K LM28500-40 <input type="text"/> 4000K LM28500-45 <input type="text"/>	4 LUXLINE 164 FEET ROLLS  4 rolls (mix & match) 2400K LM28500-15 <input type="text"/> 2700K LM28500-25 <input type="text"/> 3000K LM28500-35 <input type="text"/> 3500K LM28500-40 <input type="text"/> 4000K LM28500-45 <input type="text"/>	2 LUXLINE 164 FEET ROLLS  2 rolls (mix & match) 2400K LM28500-15 <input type="text"/> 2700K LM28500-25 <input type="text"/> 3000K LM28500-35 <input type="text"/> 3500K LM28500-40 <input type="text"/> 4000K LM28500-45 <input type="text"/>
70 CONNEXION KIT  50 Hardwire minimum <input type="text"/> 20 plugin minimum <input type="text"/>	55 CONNEXION KIT  40 Hardwire minimum <input type="text"/> 15 plugin minimum <input type="text"/>	35 CONNEXION KIT  25 Hardwire minimum <input type="text"/> 10 plugin minimum <input type="text"/>
8' PROFILE 1450 + PRIME LENS With strip holders  50 x 8' profile minimum <input type="text"/>	8' PROFILE 1450 + PRIME LENS With strip holders  40 x 8' profile minimum <input type="text"/>	8' PROFILE 1450 + PRIME LENS With strip holders  25 x 8' profile minimum <input type="text"/>
SECURITY FLAT BRACKETS  50 profile brackets (will match additional profiles ordered)	SECURITY FLAT BRACKETS  40 profile brackets (will match additional profiles ordered)	SECURITY FLAT BRACKETS  25 profile brackets (will match additional profiles ordered)
ENDCAPS  100 (will match additional profiles ordered)	ENDCAPS  80 (will match additional profiles ordered)	ENDCAPS  50 (will match additional profiles ordered)
JOINER  25 joiners	JOINER  20 joiners	JOINER  10 joiners