

# How to order SPL 1400

## Suspension Lighting

Client : \_\_\_\_\_ Project : \_\_\_\_\_

Order # : \_\_\_\_\_ Qty : \_\_\_\_\_ Date : \_\_\_\_\_

### HOW TO ORDER

Example of use **MODEL** SPL1400 - **FINISH** 3 - **LENGTH** 36 - **CCT** 30K - **LENS** OPAL - **MOUNT** SUSP/C - **VOLTAGE** 120 - **ELECTRICAL WIRE** BW

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	VOLTAGE	ELECTRICAL WIRE
SPL1400	3 = ALU 5 = BLACK 0 = OTHER	12 = 12 INCH (5W) 20 = 20 INCH (8W) 24 = 24 INCH (10W) 36 = 36 INCH (16W) 48 = 48 INCH (20W) 0 = OTHER	30K = 3000K 41K = 4100K	OPTIFLEX OPAL SX = Square 3D Optiflex SL = Square 3D Opal RX = Round 3D Optiflex RL = Round 3D Opal	SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR


### Certifications




### Finishes



### Suspension

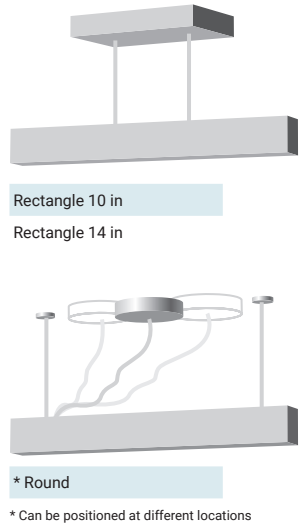


### Electrical Wire

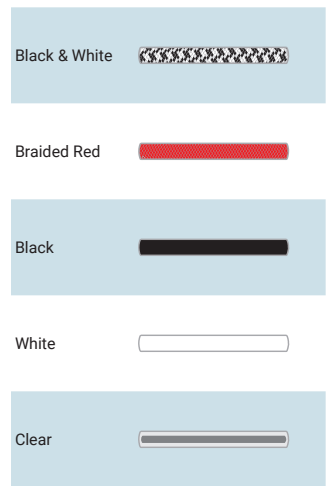

### Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



### Lenses

