



2100 Profile

2100 (LM22354-01)

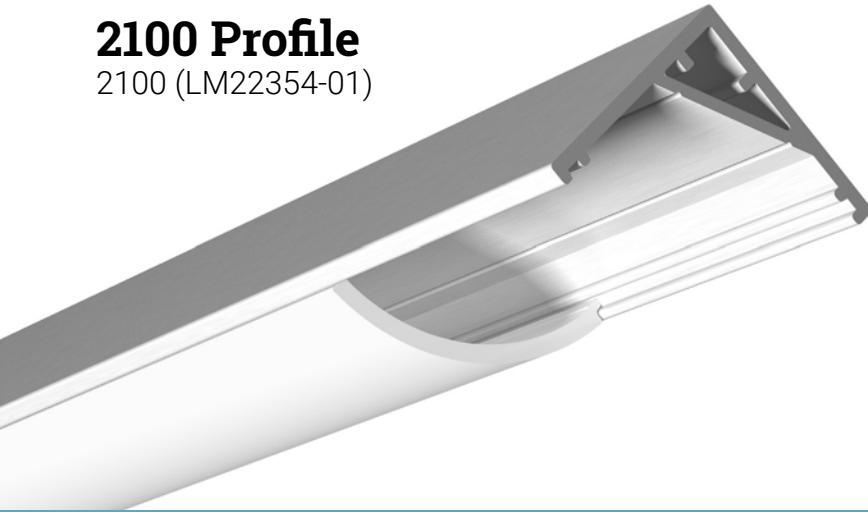

2000 Series

Cross-section dimensions:



The 2100 is **designed to allow extra lighting angles**. The profile can be installed to project at **30 or 60 degrees**, two angles for lighting extra deep or high scenes, to bring out the finest details, without hot spots.

Features

- Lighting oriented at 30 or 60 degrees without any special hardware.
- Designed to give a uniform light without hot spots with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with multiple installation accessories.

Options




LED strip compatibility

Compatible with LED strips up to **14mm** wide.

Linear weight



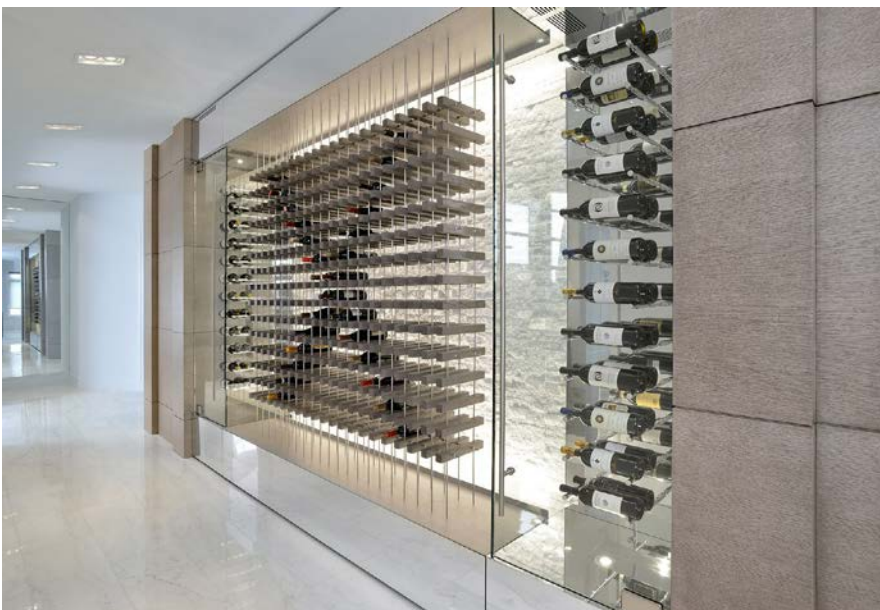



0.176 lbs/ft, 0.118 kg/m (without lens)

















2100 Profile

Components and accessories

2000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
 <p>2100 Profile 2100 (LM22354-01)</p>	 <p>2000 Round, Clear 2037 (LM22368)</p>	 <p>Round 2000-2100 Endcap 2171 (LM22392-03) RIGHT, NO HOLE 2170 (LM22392-01) RIGHT, HOLE 2173 (LM22392-07) LEFT, NO HOLE 2172 (LM22392-05) LEFT, HOLE</p>	 <p>Bracket, 2000 Series 2060 (LM22390)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>2000 Round, Optiflex 2034 (LM22364)</p>			
	 <p>2000 Round, Opal 2030 (LM22360)</p>			
2100				
PROFILE	LENS	ENDCAPS	BRACKETS	LENGTH

Lumen package

LUMEN PACKAGE *	COLOR TEMPERATURE	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	NOTES
 255 lm/ft, flex. 5/16" wide 12/24V Constant Voltage LP3528120	 Candle White 2400K	<p>Please specify the needed DC wire length (include units).</p>	 Indoor, dry (IP22) IP22	 Non-dimmable NO	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in IP22. *** Only available in CCTs of 3000K and 4200K, IP22, and lengths of 1/2/3/4/5/6/8 feet.</p>
 308 lm/ft, flex. 5/16" wide 24V Constant Voltage LP3528180	 Soft White 2700K		 Indoor, wet (IP68) IP68	 ELV dimming ELV	
 462 lm/ft, flex. 9/16" wide 24V Constant Voltage LP3528240**	 Warm White 3000K			 0-10V dimming 0-10V	
 650 lm/ft, rigid 1/2" wide, 350/700mA Constant Current LP573052***	 Bright White 3500K				
	 Neutral White 4200K				
LUMEN PACKAGE	COLOR TEMPERATURE (CCT)	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	

Notes

