


4500 Profile

4022 (LM22482-3)



4000 Series

Cross-section dimensions:




A well cherished secret that we just have to brag about. Meet our magic wand! The 4500 is a slim but extremely versatile display solution. With its **ultra-compact size** and its **complete freedom of lighting direction**, and accepting most LED strips¹, you will find many ways to install it with its wide variety of accessories.

(1) Accepts LED strips ranging up to 10mm wide.

Features

- Ultra-compact size with a diameter of only 16mm (5/8in).
- All of the 4500 brackets allow adjusting lighting direction along the axis as desired.
- Designed to give a uniform light without hot spots with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- Designed to meet North American woodworking standards.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with multiple installation accessories.

Options




LED strip compatibility

Compatible with LED strips up to **10mm** wide.

Linear weight



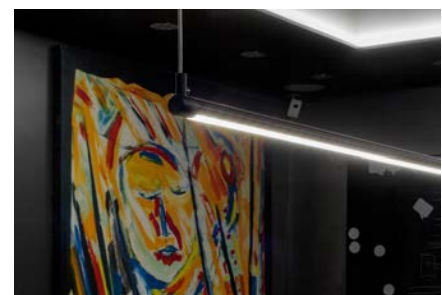












0.147 lbs/ft, 0.218 kg/m













4500 Profile

Components and accessories

4000 Series

PROFILE	LENSES	ENDCAPS / BRACKETS / ACCESSORIES	LENGTH
 <p>4500 Profile 4022 (LM22482-3)</p>	 <p>4000 Clear 4032 (LM22484-3)</p>	 <p>4500 surface bracket 4062 (LM22490-1)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>4500 Profile Black 4021 (LM22482-5)</p>	 <p>4000 Optiflex 4034 (LM22484-5)</p>	 <p>4500 Round Endcap Alu 4050 (LM22497-11) ALU, NO HOLE 4055 (LM22497-15) ALU, HOLE 4051 (LM22497-35) BLACK, NO HOLE 4056 (LM22497-31) BLACK, HOLE</p>	
	 <p>4000 Opal 4030 (LM22484-1)</p>	 <p>"U" bracket, Alu 4065 (LM22501-1)</p>	
		 <p>"P" bracket, alu 4067 (LM22501-5)</p>	
		 <p>Arm Kit Vert Surface 4090 (LM22495-1)</p>	
		 <p>Arm Kit Horz Surface 4070 (LM22492-1)</p>	
		 <p>Arm Kit Vert Insert 4092 (LM22495-3)</p>	
		 <p>Arm Kit Horz Insert 4072 (LM22492-3)</p>	
		 <p>4500 endcap susp. kit with 15ft. coax. cable 4080 (LM22320-68) ALU 4081 (LM22320-69) BLACK</p>	
		 <p>1.5' stainless steel canopy kit for coax. wire (suspended) 4075 (LM22980-30)</p>	

Lumen package

LUMEN PACKAGE*	COLOR TEMPERATURE	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	NOTES
 255 lm/ft, flex. 5/16" wide 12/24V Constant Voltage LP3528120	 Candle White 2400K	<p>Please specify the needed DC wire length (include units).</p>	<p>IP22 Indoor, dry (IP22) IP22</p>	<p> Non-dimmable NO</p> <p> ELV dimming ELV</p> <p> 0-10V dimming 0-10V</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and transluency conversion factors.</p>
 308 lm/ft, flex. 5/16" wide 24V Constant Voltage LP3528180	 Soft White 2700K				
	 Warm White 3000K				
	 Bright White 3500K				
	 Neutral White 4200K				

Notes

