



7400 (7420) Profile

7400 (LM22820-01)

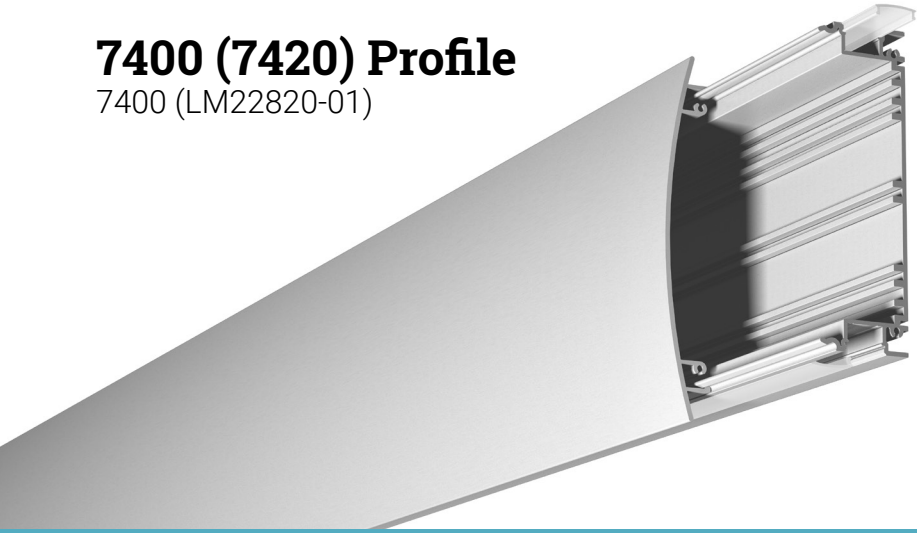

7000 Series

Cross-section dimensions:

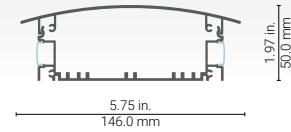

Make customized **protuberant wall fixtures** with our **7400 profile and the 7420 faceplate**. It accepts most LED strips and lenses of the 1000 Series, offering multiple lighting possibilities. Besides lighting the wall up and down, you could vary the light intensity, color, or even create dazzling animated effects. The fixture can house the power supplies and controllers internally. Horizontal or vertical luminaires can be built up to 20 feet long and connected directly onto a conventional electrical junction box.

Features

- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less in top and bottom insert.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.

Options




LED strip compatibility

The top and bottom inserts are compatible with LED strips up to **14mm** wide.

Linear weight



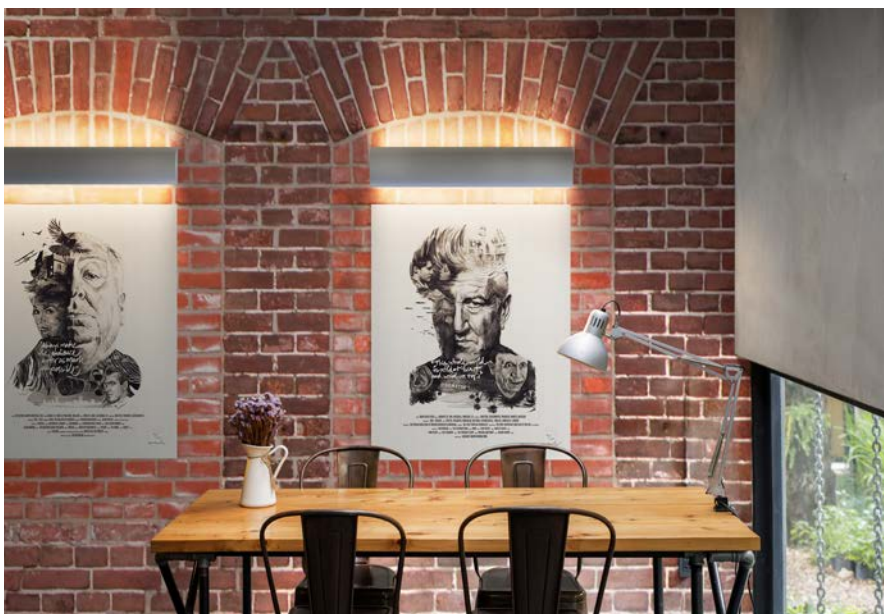





1.617 lbs/ft, 2.406 kg/m (with cover plate)


















7400 Profile

Components and accessories

7000 Series

PROFILE	FINISH	LENSES	ENDCAPS	LENGTH
 <p>7400 Profile 7400 (LM22820-01)</p>	 <p>Round cover alu 7420 7420 (LM22820-11)</p>	 <p>Standard, Clear 1269 (LM22298)</p>  <p>Standard, Spread 1265 (LM22294)</p>  <p>Standard, Optiflex 1261 (LM22290)</p>  <p>Standard, Opal 1263 (LM22292)</p>  <p>Standard, Focus 1267 (LM22296)</p>	 <p>Endcap alu 7420 7470 (LM22820-51)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
7400	7420			
PROFILE	FINISH	LENS	ENDCAPS	LENGTH

Lumen package

LUMEN PACKAGE *	COLOR TEMPERATURE	USAGE	POWER SUPPLY TYPE	NOTES
 255 lm/ft, flex. 5/16" wide 12/24V Constant Voltage LP3528120	 Candle White 2400K	 Indoor, dry (IP22) IP22	 Non-dimmable NO	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in IP22.</p> <p>*** Only available in CCTs of 3000K and 4200K, IP22, and lengths of 1/2/3/4/5/6/8 feet.</p>
 308 lm/ft, flex. 5/16" wide 24V Constant Voltage LP3528180	 Soft White 2700K	 Indoor, wet (IP68) IP68	 ELV dimming ELV	
 462 lm/ft, flex. 9/16" wide 24V Constant Voltage LP3528240**	 Warm White 3000K	 Outdoor, weatherproof (IP68, NMWU, UV-resistant) IP68+	 0-10V dimming 0-10V	
 650 lm/ft, rigid 1/2" wide, 350/700mA Constant Current LP573052***	 Bright White 3500K			
	 Neutral White 4200K			
LUMEN PACKAGE	COLOR TEMPERATURE (CCT)	USAGE	POWER SUPPLY TYPE	

Notes

