



## 9500 Profile

9500 (LM22950-40)

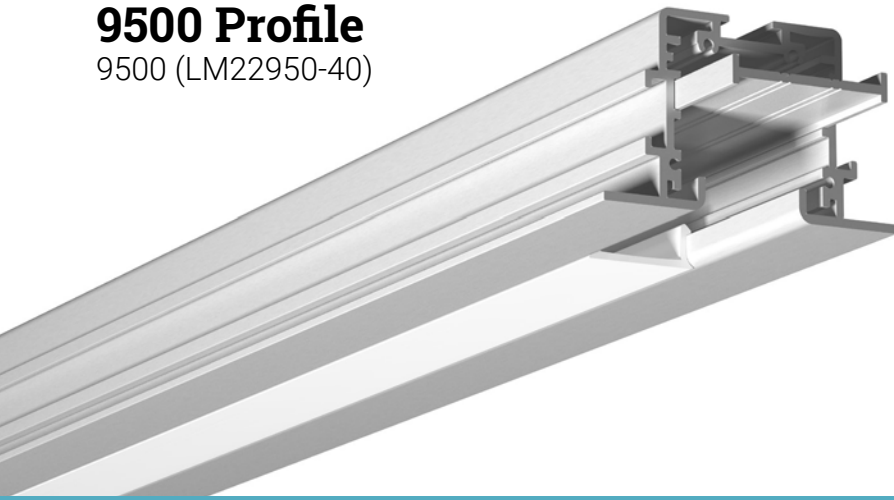

## 9000 Series

Cross-section dimensions:

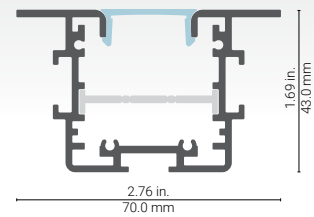

**Commercial-grade recessed linear lighting** is made easy with the use of the **9500 profile**. A powerful and highly customizable light output, paired with a rugged construction in the 6063-T5 aluminum alloy, is in contrast with the discreet visual imprint of its flat, almost-zero surface offset. Designed for suspended and plasterboard ceilings and walls, it can also be painted to organically blend in any interior.

### Features

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heatsink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has 3 application guides for 10mm (3/8-inch) wide LED strips.
- Designed to give a uniform light without hot spots when using an opal lens and a strip of 72 LEDs per meter or more.
- Designed for a flush recessed installation in suspended and gypsum panel ceilings.
- Its mounting channels make it compatible with a wide range of installation accessories.
- Designed to be used with flat lenses for an almost-zero surface offset.

### Options



### LED strip compatibility

Compatible with LED strips and PCBs up to **33mm** wide.

### Linear weight
















0.897 lbs/ft, 1.335 kg/m (without lens or insert)



# 9500 Profile
















Components and accessories

# 9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9500 Profile <b>9500</b> (LM22950-40)</p>	 <p>Flat Clear <b>9557</b> (LM22960-71)</p>	 <p>Standard 9500 Alu <b>9570</b> (LM22970-41)</p>	 <p>T-bar suspension bracket <b>9574</b> (LM22970-51)</p>	 <p>Rail Insert 1.4 in. (37mm) <b>9000</b> (LM22954-99)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
	 <p>Flat Optiflex <b>9551</b> (LM22960-72)</p>	 <p>T-bar 9500 Alu <b>9572</b> (LM22970-47)</p>	 <p>Type B seismic kit <b>9983</b> (LM22320-05)</p>	 <p>Type B straight joiner <b>1325</b> (LM22335-01)</p>	
	 <p>Flat Opal <b>9553</b> (LM22960-73)</p>		 <p>Type B horz. 45°/135° joiner <b>1328</b> (LM22335-07)</p>	 <p>Type B horz. 90° joiner <b>1326</b> (LM22335-03)</p>	
				 <p>Type B vert. 90° joiner <b>1327</b> (LM22335-05)</p>	 <p>Type B vert. 45°/135° joiner <b>1330</b> (LM22335-06)</p>
				 <p>Type B wire cover <b>8099</b> (LM22335-99)</p>	

<b>9500</b>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH

## Lumen package

LUMEN PACKAGE*	COLOR TEMPERATURE	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	NOTES
 255 lm/ft, flex. 5/16" wide 12/24V Constant Voltage <b>LP3528120</b>	 Candle White <b>2400K</b>	<p>Please specify the needed DC wire length (include units).</p>	 Indoor, dry (IP22) <b>IP22</b>	 Non-dimmable <b>NO</b>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in CCTs of 3000K and 4200K, IP22, and lengths of 1/2/3/4/5/6/8 feet.</p>
 308 lm/ft, flex. 5/16" wide 24V Constant Voltage <b>LP3528180</b>	 Soft White <b>2700K</b>		 Indoor, wet (IP68) <b>IP68</b>	 ELV dimming <b>ELV</b>	
 462 lm/ft, flex. 9/16" wide 24V Constant Voltage <b>LP3528240</b>	 Warm White <b>3000K</b>		 Outdoor, weatherproof (IP68, NMMWU, UV-resistant) <b>IP68+</b>	 0-10V dimming <b>0-10V</b>	
 650 lm/ft, rigid 1/2" wide, 350/700mA Constant Current <b>LP573052**</b>	 Bright White <b>3500K</b>				
	 Neutral White <b>4200K</b>				
LUMEN PACKAGE	COLOR TEMPERATURE (CCT)	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	

# Notes

