



## 1500 Profile

1500 (LM22230-01)

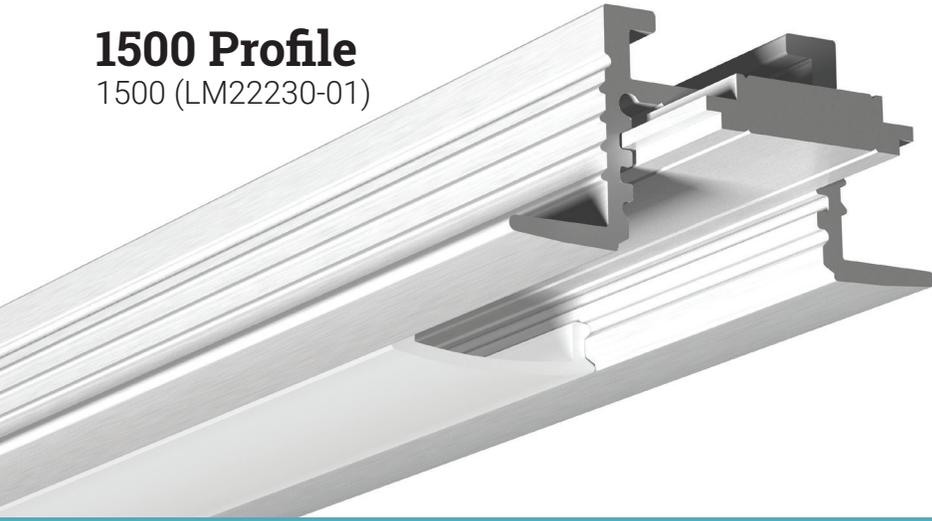

## 1000 Series

Dimensional drawing



**Recessed profile with adjustable angle!** The edge design of the 1500 profile harmonizes your décor and allows a very solid recessed installation. In addition, it offers the possibility of adjusting the projection angle<sup>(1)</sup> and provides lighting without hotspots\*.

(1) With an adjustable aluminum rail.

### Features

- Possible aluminum insert of 19.05mm (3/4-inch) wide of 2 different heights for the strip, offering a total of 5 position options for the LED light source, which allows defining the angle of lighting.
- The support rail offers the largest range of installation and assembly.
- Designed to give a uniform light without hot spots\* with an opal lens and a strip of 120 LEDs per meter or more.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (over 40 options).

### Options



### LED strip compatibility

Compatible with LED strips up to **14mm** wide.

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)



# 1500 Profile

Components and accessories

# 1000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>1500 Profile 1500 (LM22230-01)</p>	 <p>Standard, Clear 1269 (LM22298)</p>  <p>Standard, Spread 1265 (LM22294)</p>  <p>Standard, Optiflex 1261 (LM22290)</p>  <p>Standard, Opal 1263 (LM22292)</p>	 <p>Standard 1500 Alu 1571 (LM22305-85)</p>	 <p>Flat bracket 1280 (LM22306)</p>  <p>45° bracket 1283 (LM22307)</p>  <p>Swivel Bracket 180° 1286 (LM22308)</p>  <p>Phantom 1290 (LM22310)</p>  <p>2 magnet kit 1316 (LM22330)</p>  <p>Susp. Kwik-Gripper 1/4"-20NC 1497 (LM22335-31)</p>  <p>Susp. Kwik-Gripper M10 X 1.0 1493 (LM22335-11)</p>  <p>Insert bracket M10 X 1.0 1494 (LM22335-15)</p>  <p>Insert bracket 3/8"-16NC 1495 (LM22335-21)</p>  <p>Insert bracket 1/4"-20NC 1496 (LM22335-25)</p>  <p>Wall support bracket silver 1318 (LM22325-01)</p>  <p>Wall support bracket black 1319 (LM22325-05)</p>  <p>Spring bracket 1570 (LM22336)</p>	 <p>Rail Insert 3/4 in. 1235 (LM22221-1)</p>  <p>Horz joiner straight 1325 (LM22335-01)</p>  <p>Horz joiner 45° corner 1328 (LM22335-07)</p>  <p>Horz joiner 90° corner 1326 (LM22335-03)</p>  <p>Vert joiner 90° corner 1327 (LM22335-05)</p>  <p>Threaded tube M10 X 1.0 1511 (LM22335-40)</p>  <p>Threaded tube 3/8"-16NC 1512 (LM22335-41)</p>  <p>Threaded tube 1/4"-20NC 1513 (LM22335-42)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>

