


5200 Profile

5020 (LM22510-5)



5000 Series

Dimensional drawing



This profile is made of **flexible acrylic with a strip support tab made of aluminum** for better heat dissipation. This outstanding extrusion is recessed and has a tubular appearance. The 5200 profile consists of a curved half-moon-shaped lens and a support for the LED strip giving a cabinet, storage or wall lamp. It is economical and without hot spots*.

Features

- Designed to give a uniform light without hot spots with an opal lens and a strip of 120 LEDs per meter or more.
- The recessed lamp has a height of 8mm (0.31 inch) from the wall.
- The support tab for the LED strip is made of aluminum for better heat dissipation.
- The minimal depth of the hole is 8.5mm (1/3 inch) and the width is of 17mm (2/3 inch)
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.


Options



LED strip compatibility

Compatible with LED strips up to **10mm** wide

- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft)
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft)
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft)
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft)
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft)
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft)

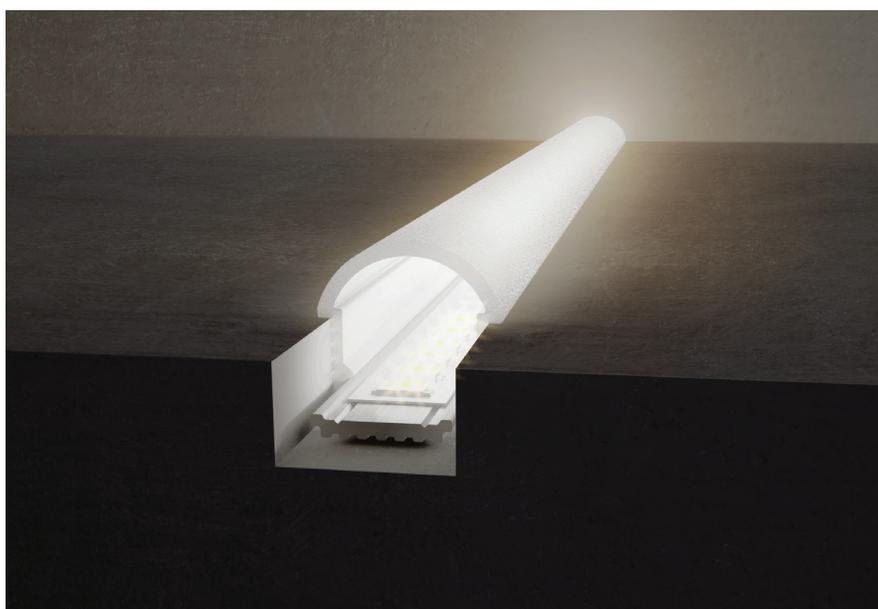

5200 Profile

Components and accessories

PROFILE

LENGTH



Custom length by sections of 96 inches (2.44m).

5200 Round 5020 (LM22510-5) Included Support

5020

PROFILE

LENGTH