



9500 Profile

9500 (LM22950-40)

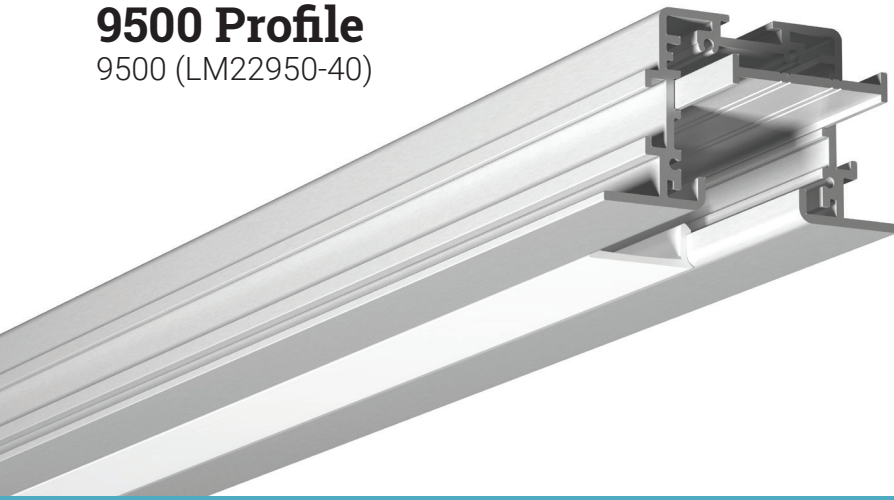

9000 Series

Dimensional drawing



This LED profile is easy to install and is **ideal for residential, commercial and industrial projects**. It can be installed in dry or humid locations. It can also be painted to match your décor. Available in lengths of 20 feet, you can create the desired effect, even in larger spaces and heights. This profile can be installed in **suspended or plasterboard ceilings and walls**.

Features

- Designed to give a uniform light without hot spots with an opal lens and a strip of 72 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- 3 Application guide for 10mm (3/8-inch) LED strip or less.
- Possibility to install 2 strips of 14mm for even more power.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories.
- Suitable for outdoor installation.
- Has 3 position slots for the LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

Options



LED strip compatibility

Compatible with LED strips up to **33mm** wide.


















- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips



9500 Profile

Components and accessories

9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9500 Profile 9500 (LM22950-40)</p>	 <p>Flat Clear 9557 (LM22960-71)</p>	 <p>Standard 9500 Alu 9570 (LM22970-41)</p>	 <p>Supp. susp. T-bar 9574 (LM22970-51)</p>	 <p>Rail Insert 1.4 in. (37mm) 9000 (LM22954-99)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>Flat Optiflex 9551 (LM22960-72)</p>	 <p>T-bar 9500 Alu 9572 (LM22970-47)</p>	 <p>Susp. Kwik-Gripper 1/4"-20NC 1497 (LM22335-31)</p>	 <p>Horz joiner straight 1325 (LM22335-01)</p>	
	 <p>Flat Opal 9553 (LM22960-73)</p>		 <p>Susp. Kwik-Gripper M10 X 1.0 1493 (LM22335-11)</p>	 <p>Horz joiner 45° corner 1328 (LM22335-07)</p>	
	 <p>Asymmetric 9549 (LM22960-9)</p>		 <p>Insert bracket M10 X 1.0 1494 (LM22335-15)</p>	 <p>Horz joiner 90° corner 1326 (LM22335-03)</p>	
			 <p>Insert bracket 3/8"-16NC 1495 (LM22335-21)</p>	 <p>Vert joiner 90° corner 1327 (LM22335-05)</p>	
<p>9500</p> <p>PROFILE</p>	<p>LENS</p>	<p>ENDCAPS</p>	<p>BRACKETS</p>	<p>ACCESSORIES</p>	<p>LENGTH</p>