

How to order RCL 9500

Recessed Lighting

Client :

Project :

Order # :

Qty :

Date :

HOW TO ORDER

Example of use


MODEL	FINISH	LENGTH	CCT	LENS	VOLTAGE
9500SC	3	36	30K	OPAL	120

MODEL	FINISH	LENGTH	CCT	LENS	VOLTAGE
9500SC = SUSPENDED CEILING	3 = ALU	12 = 12 INCH (5W)	30K = 3000K	OPTIFLEX	120 = 120VAC non-dimm.
9500RE = RECESSED (6-240 INCH)	5 = BLACK	20 = 20 INCH (8W)	41K = 4100K	OPAL	120D = 120VAC dimm.
	0 = OTHER	24 = 24 INCH (10W)			240 = 240VAC non-dimm.
		36 = 36 INCH (16W)			CV = Constant voltage, 12V or 24V
		48 = 48 INCH (20W)			
		0 = OTHER			

Certifications




Finishes

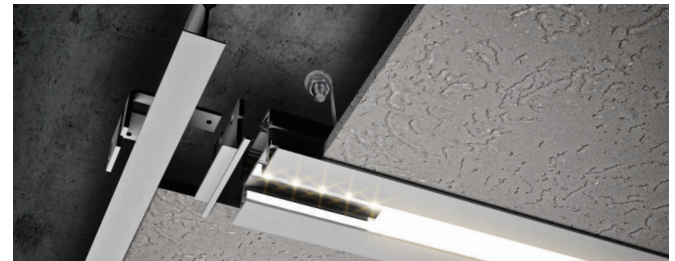

Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Installation kit for suspended ceiling (using T-bars) and anti-seismic bracket with aircraft-grade cable
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



Lenses

