



9800 Profile

9800 (LM22950-70)

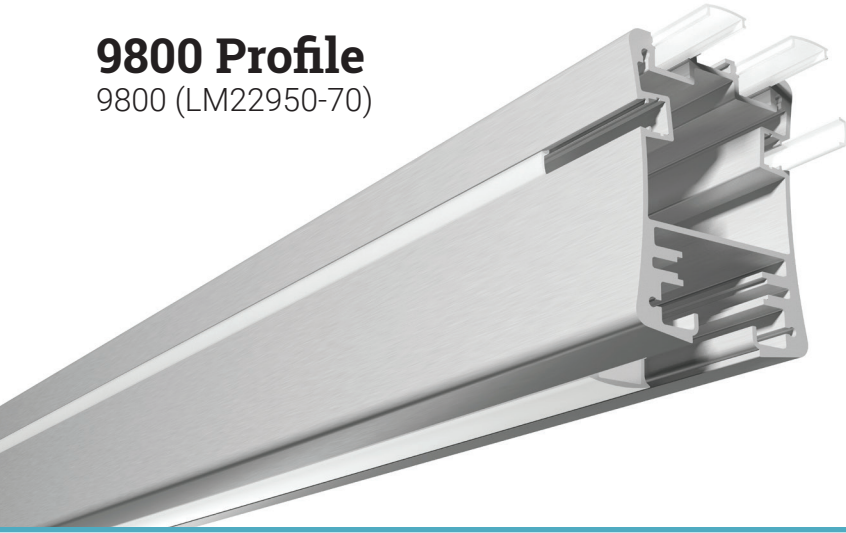

9000 Series

Dimensional drawing



This profile is **easy to install** and is ideal for residential, commercial and industrial projects. Its interior space allows it to **accommodate the required transformer** (TFT “Value Series”). It can be installed in dry or humid locations. It can also be painted to match your décor. Available in lengths of 20 feet, you can create the desired effect, even in larger spaces and heights. This profile is designed to be suspended and **offers lighting from all 4 sides**. The down lighting insert has a surface area of 33mm and 2 levels, allowing the use of one or more LED strips, and 9000 Series lenses. The two top inserts can each accommodate a 14mm or narrower LED strip, with 1000 Series lenses. The two lateral channels accept 10mm or narrower LED strips, as well as lenses from the 4000 series. You can also replace the side lighting with wood panel inserts, for a more “designer” look.

Features


- Designed to give a uniform light without hot spots* with an opal lens and a strip of 120 LEDs per meter or more.
 - Lighting down: With an opal or frosted lens and a strip of 72 LEDs or more per meter using the farthest insert slot.
 - Lighting from the top: with an opal lens and strip of 120 LEDs per meter or more.
 - Side lighting: With an opal lens and a strip of 180 LEDs per meter.
- Custom length by sections of 6 to 240 inches (6m).
- 3 Application guides for 10mm (3/8-inch) LED strip or less for the bottom channel.
- 1 application guide for 10mm (3/8 inch) LED strip or less for the top channels.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation. Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (more than 40 choices).
- Suitable for outdoor installation.
- Has 2 position slots for the bottom LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

Options



LED strip compatibility

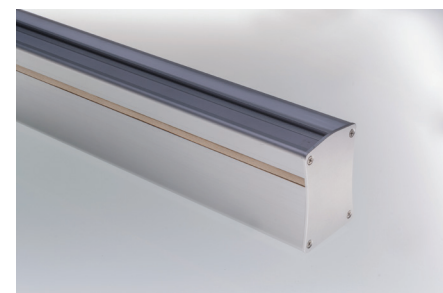



























- (1) The bottom channel is compatible with LED strips up to **33mm** wide.
 - (1) B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
 - (1) B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
 - (1) B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
 - (1) B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
 - (1) B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
 - (1) B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
 - (1) B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips
- (2) The top channels are compatible with LED strips up to **14mm** wide.
- (3) The side channels are compatible with LED strips up to **10mm** wide.
 - (2-3) B3528-xxV-60-8mm-4.8W (95 lm/ft)
 - (2-3) B3528-xxV-120-8mm-9.6W (220 lm/ft)
 - (2-3) B3528-xxV-120H-5MM-9.6W (220 lm/ft)
 - (2-3) B3528-24V-180H-5MM-14.4W (288 lm/ft)
 - (2) B3528-xxV-240-14mm-19.5W (410 lm/ft)
 - (2-3) B5050-xxV-60-10mm-14.4W (407 lm/ft)
 - (2-3) B5050-xxV-72-10mm-17.8W (488 lm/ft)
 - (3) SIDE WOOD YELLOW BIRCH
 - (3) SIDE WOOD OAK



9800 Profile

Components and accessories

9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH	
 <p>9800 Profile Alu 9800 (LM22950-70)</p>	 <p>9800 Clear (bottom) 9547 (LM22960-7)</p>	 <p>9800 Alu 9871 (LM22970-71)</p>	 <p>Susp. Kwik-Gripper 1/4"-20NC 1497 (LM22335-31)</p>	 <p>Rail Insert 1.4 in. (37mm) 9000 (LM22954-99)</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>	
 <p>9800 Profile Black 9810 (LM22950-75)</p>	 <p>9800 Optiflex (bottom) 9541 (LM22960-1)</p>	 <p>9800 Black 9875 (LM22970-75)</p>	 <p>Susp. Kwik-Gripper M10 X 1.0 1493 (LM22335-11)</p>	 <p>Insert bracket M10 X 1.0 1494 (LM22335-15)</p>		
	 <p>9800 Opal (bottom) 9543 (LM22960-3)</p>		 <p>Insert bracket 3/8"-16NC 1495 (LM22335-21)</p>	 <p>Horz joiner straight 1325 (LM22335-01)</p>		
	 <p>Standard, Clear (top) 1269 (LM22298)</p>		 <p>Insert bracket 1/4"-20NC 1496 (LM22335-25)</p>	 <p>Horz joiner 45° corner 1328 (LM22335-07)</p>		
	 <p>Standard, Optiflex (top) 1261 (LM22290)</p>		 <p>Threaded tube M10 X 1.0 1511 (LM22335-40)</p>	 <p>Horz joiner 90° corner 1326 (LM22335-03)</p>		
	 <p>Standard, Opal (top) 1263 (LM22292)</p>		 <p>Threaded tube 3/8"-16NC 1512 (LM22335-41)</p>	 <p>Vert joiner 90° corner 1327 (LM22335-05)</p>		
	 <p>4000 Clear (side) 4032 (LM22484-3)</p>		 <p>Threaded tube 1/4"-20NC 1513 (LM22335-42)</p>			
	 <p>4000 Optiflex (side) 4034 (LM22484-5)</p>					
	 <p>4000 Opal (side) 4030 (LM22484-1)</p>					
	 <p>Yellow birch wood panel (side) 9887 (LM22960-87)</p>					
	 <p>Oak wood panel (side) 9889 (LM22960-89)</p>					
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES		LENGTH