

5000 Series

Dimensional drawing



This **profile is made of flexible acrylic with a strip support tab made of aluminum** for better heat dissipation. This outstanding extrusion is recessed with a slight edge on each side. The 5300 profile consists of a built-in lens with edges and a support for the LED strip giving a cabinet, storage or wall lamp.

Options

⊗




Compatible with LED strips up to 10mm wide.

- B3528-xxV-60 8mm 4.8W (95 lm/ft)
- B3528-xxV-120 8mm 9.6W (220 lm/ft)
- B3528-xxV 120H 5mm 9.6W (220 lm/ft)
- B3528-24V 180H 5mm 14.4W (288 lm/ft)
- B5050-xxV-60 10mm 14.4W (407 lm/ft)
- B5050-xxV-72 10mm 17.8W (488 lm/ft)



- The recessed lamp has a height of 8mm (0.31 inch) from the wall.
- The support tab for the LED strip is made of aluminum.
- The minimal depth of the hole is 8.5mm (1/3 inch) and the width is 17mm (2/3 inch).
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8-inch) LED strip or less.
- Designed to meet North-American woodworking standards.

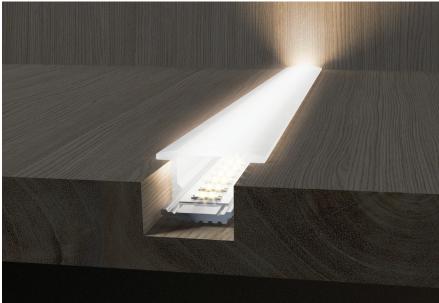

5300 Profile

Components and accessories



