

1000 Series

Dimensional drawing

















This profile is **the thinnest of the 1000 Series** being only **6mm thick** and 18.7mm wide and is compatible with most of our LED strips. Perfect for tight spots, it will be very discreet and will stand out.

Features

- The most compact profile of the 1000 Series, only 6mm thick.
- · Custom length by sections of 2 to 240 inches (6m).
- · Application guide for 10mm (3/8 inch) LED strip or less.
- Designed to meet North-American woodworking standards.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- · Its use increases the lifetime of your LED strip.
- ${\boldsymbol{\cdot}}$ Compatible with several installation accessories.

Options








LED strip compatibility

Compatible with LED strips up to 14mm wide.

- B3528-xxV-60 8mm 4.8W (95 lm/ft)
- B3528-xxV-120 8mm 9.6W (220 lm/ft)
- B3528-xxV 120H 5mm 9.6W (220 lm/ft)
- B3528-24V 180H 5mm 14.4W (288 lm/ft)
- B3528-xxV-240 14mm 19.5W (410 lm/ft)
 B5050-xxV-60 10mm 14.4W (407 lm/ft)
- B5050-xxV-72 10mm 17.8W (488 lm/ft)

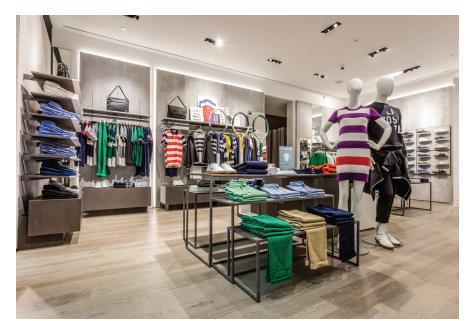





1000 Series

1100 Profile

Components and accessories

PROFILE	LENSES	ENDCAPS	BRACKETS	LENGTH
1100 Profile 1200 (LM22190)	Standard, Clear 1269 (LM22298) Standard, Spread 1265 (LM22294) Standard, Optiflex 1261 (LM22290)	Standard 1100 1294 (LM22299-11 WITHOUT H 1295 (LM22299-15 HOLE)	Flat bracket 1280 (LM22306) 45° bracket 1283 (LM22307) OLE) Swivel Bracket 180° 1286 (LM22308)	Custom length by sections of 2 to 240 inches (6m).
	1263 (LM22292)			
	Square 3D, Optiflex 1262 (LM22290-5)	PER		
		Square 3D 1100 1188 (LM22299-25 WITHOUT H 1189 (LM22299-21 HOLE)	IOLE)	
	Square 3D, Opal 1264 (LM22292-5)			
	Round 3D, Optiflex 1252 (LM22290-7)	The second		
	Round 3D, Opal 1254 (LM22292-7)	Round 3D 1100 1190 (LM22299-35 WITHOUT H 1191 (LM22299-31 HOLE)	OLE)	
1000				
1200 PROFILE	LENS	ENDCAPS	BRACKETS	LENGTH
FROFILE	LENS	ENDUAFO	DRAGRETS	LENGIN