

How to order SPL 1400

Suspension Lighting

Client : _____ Project : _____

Order # : _____ Qty : _____ Date : _____

HOW TO ORDER

Example of use

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	VOLTAGE	ELECTRICAL WIRE
SPL1400	3	36	30K	OPAL	SUSP/C	120	BW

MODEL	FINISH	LENGTH	CCT	LENS	MOUNT	VOLTAGE	ELECTRICAL WIRE
SPL1400	3 = ALU 5 = BLACK 0 = OTHER	12 = 12 INCH (5W) 20 = 20 INCH (8W) 24 = 24 INCH (10W) 36 = 36 INCH (16W) 48 = 48 INCH (20W) 0 = OTHER	30K = 3000K 41K = 4100K	OPTIFLEX OPAL SX = Square 3D Optiflex SL = Square 3D Opal RX = Round 3D Optiflex RL = Round 3D Opal	SUSP/C = Susp. kit with canopy SUSP/S = Susp. kit without canopy	120 = 120VAC non-dimm. 120D = 120VAC dimm. 240 = 240VAC non-dimm. CV = Constant voltage, 12V or 24V	BW = BLACK & WHITE R = BRAIDED RED W = WHITE C = CLEAR


Certifications




Finishes



Suspension

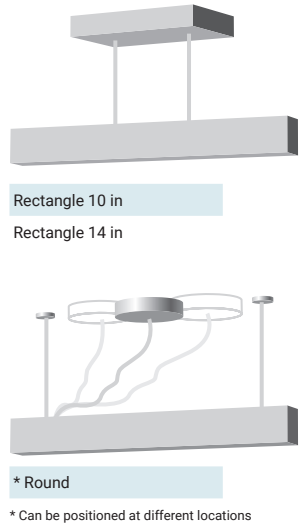


Electrical Wire

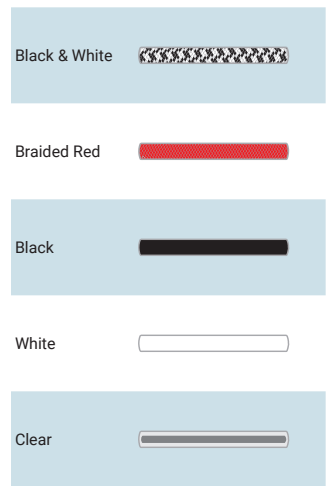

Features

- Made in North America
- ALCOA 6063T-5 Aluminum
- Guideline for easy installation
- Dimmable (use Lutron CTCL-153P-Skylark or Diva)



Lenses

