



9400 Profile

9400 (LM22950-30)

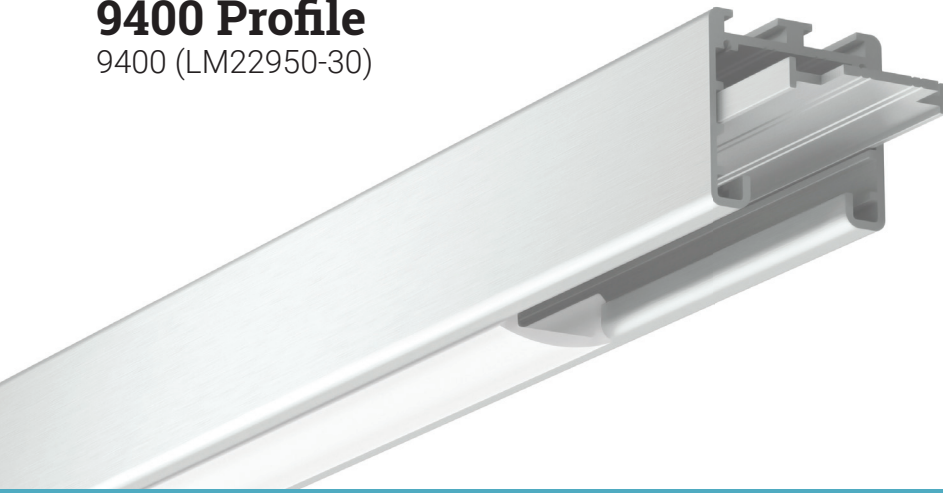

9000 Series

Dimensional drawing



This LED profile is easy to install and ideal for **residential, commercial and industrial projects**. Great in open or high spaces, this profile can be installed on surfaces or suspended. It is a profile designed to ensure that the points of the LED source are not visible*, offering linear lighting that's soft and uniform. All in one! A great design and versatility combined!

Features

- Designed to give a uniform light without hot spots* with an opal lens and a strip of 120 LEDs per meter or more.
- Custom length by sections of 2 to 240 inches (6m).
- 3 application guides for 10mm (3/8-inch) or narrower LED strips.
- Possibility to install 2 IP22 strips of 14mm for even more power.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation. Its use increases the lifetime of your LED strip.
- Compatible with several installation accessories (over 40 options).
- Suitable for outdoor installation.
- Has 3 position slots for the LED strip tray insert (the closer the strip is to the lens, the higher the chances of seeing the bright spots).

Options



LED strip compatibility

Compatible with LED strips up to **33mm** wide.



























- B3528-xxV-60 - 8mm - 4.8W (95 lm/ft) 1-3 strips
- B3528-xxV-120 - 8mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-xxV - 120H - 5mm - 9.6W (220 lm/ft) 1-3 strips
- B3528-24V - 180H - 5mm - 14.4W (288 lm/ft) 1-3 strips
- B3528-xxV-240 - 14mm - 19.5W (410 lm/ft) 1-2 strips
- B5050-xxV-60 - 10mm - 14.4W (407 lm/ft) 1-3 strips
- B5050-xxV-72 - 10mm - 17.8W (488 lm/ft) 1-3 strips



9400 Profile

Components and accessories

9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9400 Profile 9400 (LM22950-30)</p>	 <p>9000 Clear 9547 (LM22960-7)</p>	 <p>9200-9400 Alu 9270 (LM22970-11)</p>	 <p>Surface 9000 9571 (LM22980-1)</p>	 <p>Rail Insert 1,4 in. (37mm) 9000 (LM22954-99)</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>9400 Profile Black 9410 (LM22950-35)</p>	 <p>9000 Optiflex 9541 (LM22960-1)</p>	 <p>9200-9400 Alu, Black 9272 (LM22970-15)</p>	 <p>Wall bracket 9486 (LM22980-41)</p>	 <p>Horz joiner straight 1325 (LM22335-01)</p>	
 <p>9000 Opal 9543 (LM22960-3)</p>	 <p>9000 Focus 9545 (LM22960-5)</p>		 <p>Signage swivel bracket 9492 (LM22980-61)</p>	 <p>Horz joiner 45° corner 1328 (LM22335-07)</p>	
			 <p>Swivel sign arm small 6 in. 9491 (LM22980-55)</p>	 <p>Horz joiner 90° corner 1326 (LM22335-03)</p>	
			 <p>Swivel sign arm large 18 in. 9490 (LM22980-51)</p>	 <p>Vert joiner 90° corner 1327 (LM22335-05)</p>	
			 <p>Susp. Kwik-Gripper 1/4"-20NC 1497 (LM22335-31)</p>		
			 <p>Susp. Kwik-Gripper M10 X 1.0 1493 (LM22335-11)</p>		
			 <p>Insert bracket M10 X 1.0 9999 (LM23000-01)</p>		
			 <p>Insert bracket 3/8"-16NC 9998 (LM23000-03)</p>		
			 <p>Insert bracket 1/4"-20NC 9997 (LM23000-05)</p>		
			 <p>Threaded tube M10 X 1.0 1511 (LM22335-40)</p>		
			 <p>Threaded tube 3/8"-16NC 1512 (LM22335-41)</p>		
			 <p>Threaded tube 1/4"-20NC 1513 (LM22335-42)</p>		

