

P5730-100-700mA-20W-3000K-48"-IP22


Specification Sheet




PHYSICAL	
Product Type	Rigid PCB LED Strip
SMD Type	5730
Strip Width	1/2 in 12.4 mm
Strip Length	47 in 1193.8 mm
Number of LED Chips	100 LED
Lifespan	50 000 Hrs
IP Code (IEC standard 60529)	IP22

ELECTRICAL	
Input Type	DC, Constant Current
Input Voltage	700 mA
Rated Power (Max.)	20W Total

LIGHTING	
Luminous Flux	2742.66 lm
Luminous Efficacy	133.1 lm/W
Correlated Color Temperature	3000K (Warm White)
Colour Rendering Index	83.6
R9	17
dUV (black-body curve deviation)	-0.0007

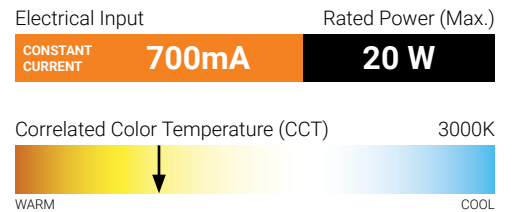

DIMENSIONS

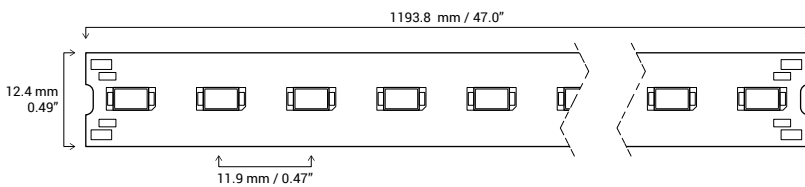

P5730-100-700mA-20W-3000K-48"-IP22

Test Data for Full PCB Strip (100 LED/47in)



Chroma Parameters

Chromaticity Coordinates: $x=0.4312, y=0.4004, u=0.2485, v=0.3460, duv=-0.0007$
 Correlated Color Temperature: 3069K
 Dominant Wave.: 582.8nm
 Purity: 49.6%
 Flux RGB Ratio: R=22.5%, G=75.8%, B=1.7%
 Peak Wave: 603.7nm
 Half Width: 137.5nm

Rendering Index: Ra=83.6

R1=82 R2=91 R3=97 R4=80 R5=81 R6=87 R7=85 R8=64
 R9=17 R10=78 R11=78 R12=68 R13=84 R14=98 R15=77


Photo Parameters

Luminous Flux: 2742.66 lm
 Luminous Efficacy: 133.1 lm/W
 Radiant Flux: 9112.7 mW
 Iv: 0.0 mcd

Electrical Parameters

Voltage: U=29.5V
 Current: I=700mA
 Power: P=20.6W
 Power Factor: PF=1.000

C.I.E. 1931 Chromaticity Diagram

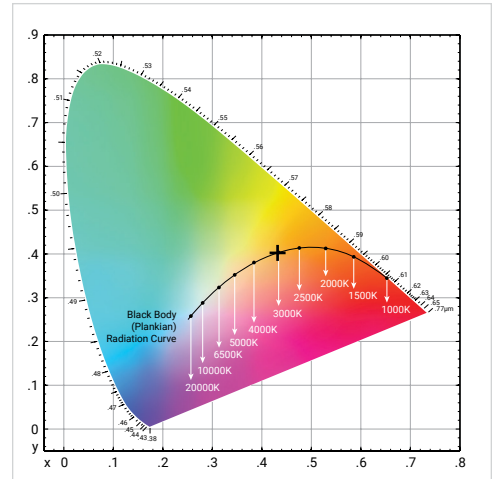

Spectral Ratio: R=44.1%, G=43.8%, B=12.2%

