

B5050-24V-60-10mm-14.4W-RGB+WHITE-IPXX

Specification Sheet




PHYSICAL

Product Type	Flexible LED Strip		
SMD Type	5050		
Strip Width	2/5 in	10 mm	
Strip Total Length (Roll)	16.4 ft	5 m	
LED Linear Density	18.3 LED/ft	60 LED/m	300 LED/roll total
Can be cut at every	6.56 in	166.7 mm	10 LED
Lifespan	50 000 Hrs		

ELECTRICAL


Input Type	DC, Constant Voltage		
Input Voltage	24V DC		
Rated Power (Max.)	4.4 W/ft	14.4 W/m	72 W/roll total



Electrical Input

Rated Power (Max.)

CONSTANT VOLTAGE	24V DC	72 W/roll
------------------	---------------	------------------

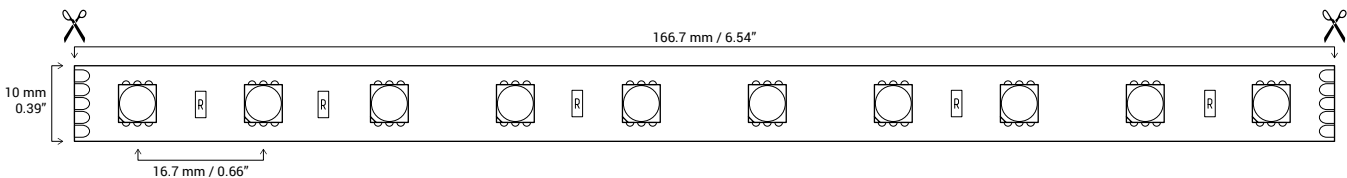

PRODUCT RANGE

Part Number	Code	IP	CCT*	Luminous Flux								
				lm / ft			lm / m			lm / roll (5m)		
B5050-24V-60-10mm-14.4W-RGB+WHITE-IP22	LM28340-21	IP22	RGB	RGB:	W:	Total:	RGB:	W:	Total:	RGB:	W:	Total:
B5050-24V-60-10mm-14.4W-RGB+WHITE-IP68	LM28340-11	IP68	+WHITE	64	201	265	210	660	870	1050	3300	4350

CCT* - Correlated Color Temperature
 CRI** - Colour Rendering Index
 duv*** - Black-body Curve Deviation

Office & Showroom:
 6068 Metropolitan East, Montreal, Quebec, H1S 1A9, Canada

Toll Free: 1-855-384-3384
 E-mail: info@lumentruss.com
 www.lumentruss.com

Copyright Lumentruss, All Rights Reserved
 Lumentruss reserves the right to make changes to this product
 without advance notice, and any such change shall be effective immediately

B5050-24V-60-10mm-14.4W-RGB+WHITE-IP22/IP68

Test Data for 1 Meter LED Strip Length



Coming Soon