


CATALOG 3.0

LINEAR LED LIGHTING SYSTEM




NEW PROFILES

Brand new products
1450, 3100, 8500, 8800 and more!

NEW CATEGORIES

Luminaires, recessed downlights,
track light system and more!



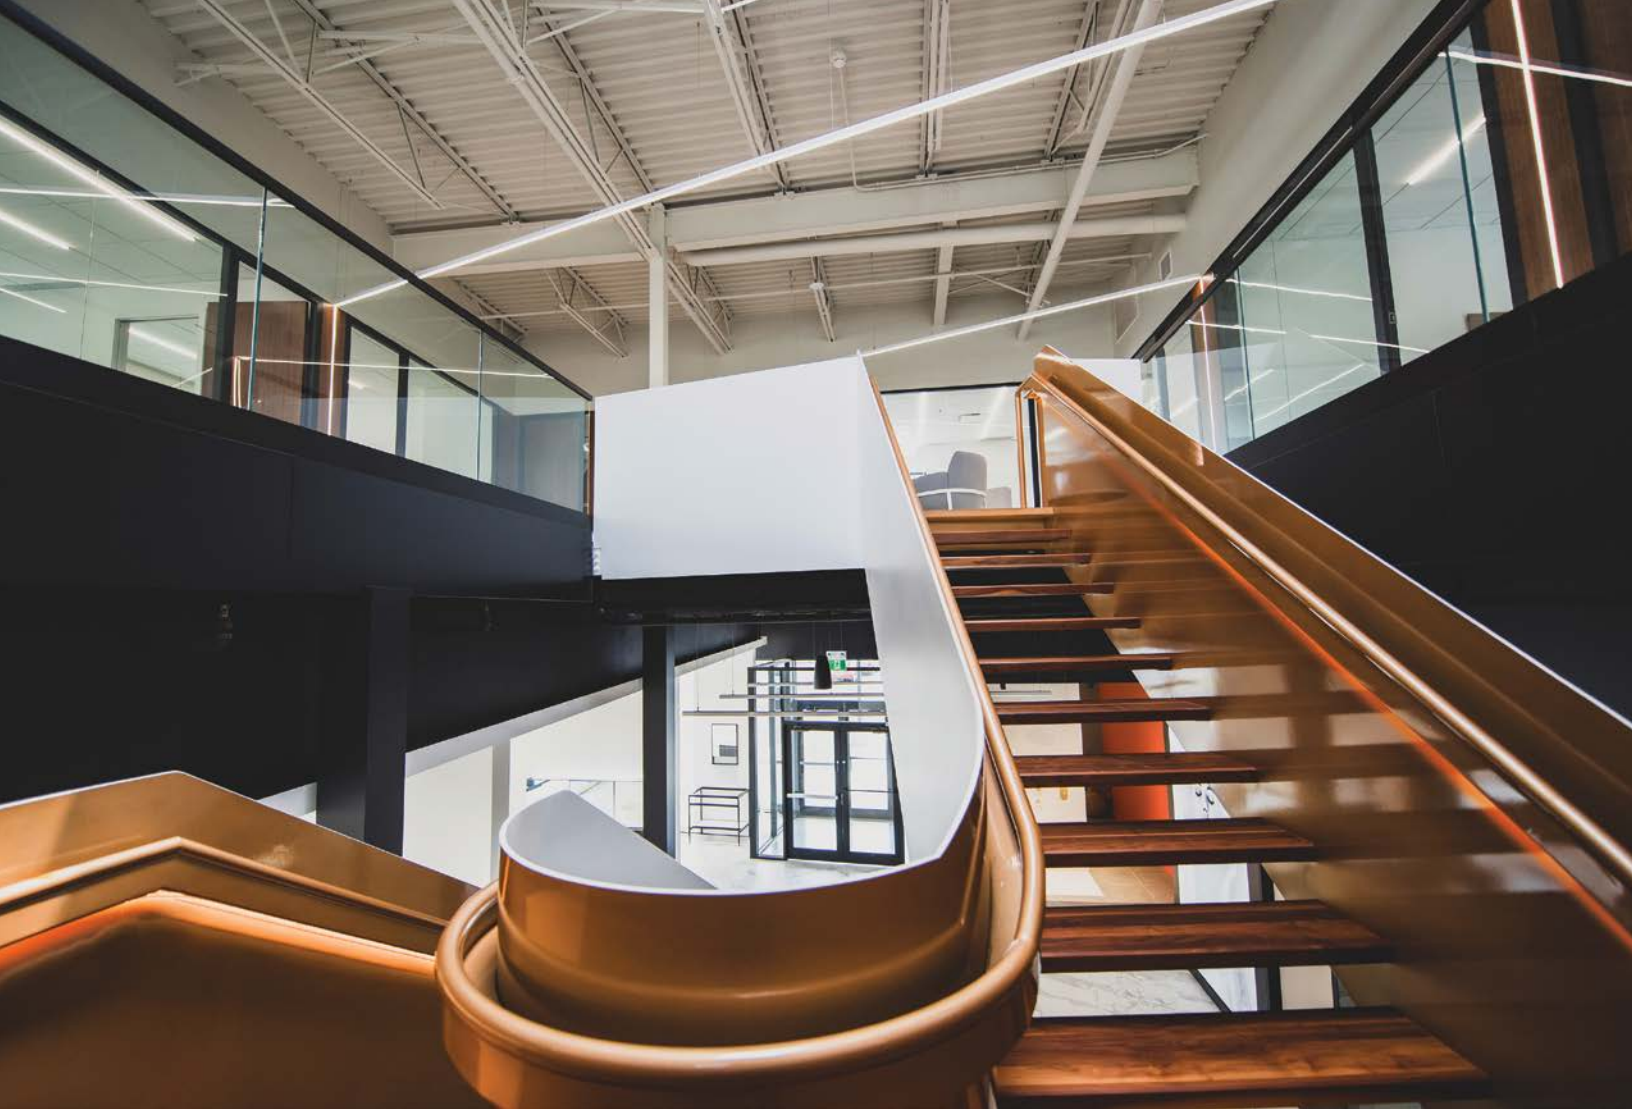

ABOUT LUMENTRUSS

We are proud to introduce the new **LUMENTRUSS V3.0** catalogue, featuring our extensive range of profiles for architectural LED lighting. Through time, we have created many new extrusions and accessories to suit your very needs.
















































Our LED profiles are easily installed and are perfect for residential, commercial and industrial purposes. Made in Canada with 6063-T5 aluminum, our LED profiles can be used both indoors and outdoors, in dry or wet locations. They all meet the North American woodworking standards. Our products are custom-made and available in sections up to 20 linear feet. They are suitable for any space and can be anodized or painted with the color of your choice to match your décor. These extrusions can be installed on a surface, recessed or even installed on a multitude of suspension lights.

Find out about our LTPS dimmable drivers on electronic low-voltage dimmers allowing you to connect to different automation systems and controls in place. The uses of the **LUMENTRUSS** range are literally limitless! We work daily to expand our range of profiles and accessories to meet all your needs.

100%
CUSTOMIZED

We create architectural lighting to your specifications. Our profiles can be extensively customized, offering you endless creative possibilities.

INDEX

	Optics Pages 4-5		5350 Profile Pages 50-51		SILO Pages 98-99
	Legend Page 6		5450 Profile Pages 52-53		PIKE Pages 100-101
	How to Order Page 7		5560 Profile Pages 54-55		APSYS Pages 104-105
	1100 Profile Pages 10-11		7400(7420) Profile Pages 58-59		ARCUS Pages 106-107
	1200 Profile Pages 12-13		7400(7450) Profile Pages 60-61		GEMINUS Pages 108-109
	1300 Profile Pages 14-15		7500 Profile Pages 62-63		NIDUS Pages 110-111
	1400 Profile Pages 16-17		7650 Profile Pages 64-65 + 66-67		SULCUS Pages 112-113
	1450 Profile Pages 18-19 + 20-21		7800 Profile Pages 68-69		LATUS Pages 114-115
	1500 Profile Pages 22-23		7850 Profile Pages 70-71		TASKLINE Luminaire Pages 118-119-120-121
	1650 Profile Pages 24-25		8500 Profile Pages 74-75 + 76-77		8700 Profile (serzo) Pages 122-123
	1690 Profile Pages 26-27		8800 Profile Pages 78-79		STUD Luminaire Pages 124-125
	1800 Profile Pages 28-29		8860 Profile Pages 80-81		LIGHT TASK Lamp Pages 126-127-128-129
	2000 Profile Pages 32-33		8900 Profile Pages 82-83		OMEGA Recessed downlight Pages 132-133-134-135
	3100 Profile Pages 36-37		9400 Profile Pages 86-87		TRAXX Track light system Pages 136-137-138-139
	3200 Profile Pages 38-39		9850 Profile Pages 88-89		LED Engines Pages 142 to 153
	4400 Profile Pages 42-43		TIGA Pages 92-93		Power Supplies Pages 154-155
	4500 Profile Pages 44-45		TOOBYFOR Pages 94-95		Sample Kits Pages 157
	5000 Profile Pages 48-49		TAO Pages 96-97		Appendix Pages 158-160

OUR LED LIGHT SOURCES

BRIGHT, BEAUTIFUL LIGHT OUR LED LIGHT SOURCES

FULL RANGE

We offer a comprehensive range of flexible LED engines in a variety of LED types, sizes, densities, colors, and voltages.

- The LED engines have excellent flexibility but also a solid construction.
- A variety of densities are available, from 18 LEDs per foot for ambient lighting, to well over 73 LEDs per foot for high intensity, dot-free appearance.
- We offer a complete palette of industry standard white and color LEDs.

CERTIFIED QUALITY TOP PERFORMANCE

From the specifications and design to the sourcing and manufacturing processes, rigorous quality controls backed by leading certification authorities ensure that you get a product that is guaranteed to perform to expectations.

- Certified by the Underwriters Laboratories and Intertek for compliance with the US and Canadian lighting and electrical codes and regulations.
- Compliance with RoHS European standards for quality and reduction of hazardous materials.
- California's Title 24 lighting compliance.

We settle for nothing less than the best in LED light sources. Energy efficiency is a key parameter in any application, and our LED engines rank consistently in the top range of energy efficient LED products on the market.

- Luminous efficacy of over 80 lumens per Watt in our standard 3528 and 5050 engines.
- Up to 130 lumens per watt in the high-power 2835 engines.



Lumen package	Physical		Electrical		Lumens/foot			
	Width	Density, LED/ft	DC Input	Rated Power, W/ft	Clear lens	Optiflex lens	Opal lens	Prime lens
LP0	5/16" (8mm)	18.3	12V 24V	1.5	124	109	64	94
LP1	5/16" (8mm)	36.6	24V	1.5	155	136	80	118
LP2	5/16" (8mm)	36.6	12V 24V	2.9	246	217	128	186
LP3	5/16" (8mm)	54.9	24V	4.4	297	262	154	225
LHP	2/5" (10mm)	73.2	24V	7	676	595	350	511

LIFELIKE COLORS

No more bleak colors and ugly hue shifts that have plagued the post-incandescent lighting world. Enjoy vivid, lifelike colors, and benefit from the superior energy efficiency of our white LED engines at the same time.

- Our whites provide a color rendering index (CRI) that is over 95, for a healthier, more natural lighting, particularly useful in color-critical environments such as retail, art & design, fashion, etc.



CRI < 60

CRI > 95

VIVID REDS

The red color is essential in all our perception of the world, from food to healthy-looking skintones. While many LEDs on the market boast a high CRI, few display bright reds properly.

- Our LED engines feature an R9 (bright red) value of over 60, for a vivid display of red tones. We are also in the processing of continually improving it, with many products' R9 being already well over 60.



R9 < 30

R9 > 60


CUSTOM TAILORED

Some of our luminaires use custom LED light sources to optimize the form factor, improve the heat dissipation, and maximize the performance and efficiency.

- Contact us with your project concept, and we can design and source the manufacturing of one-of-a-kind LED light sources to your very own requirements.



Our Standard Color Temperatures (CCT)



Compliance with California's Title 24 Building Energy Efficiency Program, with a CRI over 90 and a luminous efficacy of over 50 lumens per Watt.



OUR OPTICS

CUSTOMIZE YOUR LIGHTING WITH OUR COMPLETE RANGE OF LENSES

Without lens



CLEAR

This basic lens is designed to maximize the light output.

- Addition of components to increase flexibility
- Increases CCT of 50-80 Kelvin
- cRUus recognized component
- UV resistant
- Transmits 96.5% of the original light output from the LED source

OPTIFLEX



The frosted lens is developed for standard lighting, allowing an optimal light diffusion while maintaining high brightness.

- Addition of components to increase flexibility
- CCT reduction of 120-140 Kelvin
- cRUus recognized component
- UV resistant
- Transmits 85% of the original light output from the LED source

OPAL

A lens developed for thin profiles, allowing the elimination of the hot spots of the LED light source.

- Faded effect of the light source (minimum 120 LED per meter not to see the dots)
- CCT reduction of 190-240 Kelvin
- cRUus recognized component
- UV Resistant
- Transmits 65% of the original light output from the LED source





EXTRAS

Many lenses are available in extra shapes and materials, offering a greater creative freedom in the design of unique lighting fixtures.

- Volumetric lenses provide light diffusion over a wider angle, as well as a dot-free appearance of the source due to increased inner space
- cRUus component Certification
- UV Resistant



SPREAD

With its integrated prismatic grooves, this lens scatters the light and increases the beam angle to better light nearby objects.

- Addition of components to increase flexibility
- CCT reduction of 50-80 Kelvin
- cRUus recognized component
- UV resistant
- Transmits 95% of the original light output from the LED source



FOCUS

A converging lens that is designed to focus the light beam, for targeted and focused lighting.



- Addition of components to increase flexibility
- CCT reduction of 50-80 Kelvin
- cRUus recognized component
- UV resistant
- Transmits 85% of the original light output from the LED source



PRIME

A brand new optical diffuser Lumentruss has been working on to give you a no dots solution with more light output.

- Combines the qualities of the opal and optiflex lenses without their downsides
- cRUus recognized component
- Same effect as our opal lens but 45% more efficient
- Gives a uniform light
- Designed to give a no dots solution while keeping a much more interesting light effect and higher Lumen rate
- CCT 80% more accurate
- 50% more flexible



*CCT offset: average change of the LED source's original Correlated Color Temperature, in Kelvin

LEGEND

Symbols used and their meaning



Made in North America (plastic and aluminum components).



Architectural-grade 6063-T5 aluminum alloy with a 2.68 g/cm density and superior mechanical quality.



Components recognized by UL (Underwriters Laboratories) / IFDR Low-voltage Lighting Systems, Power Units, Luminaires, and Fittings



Certified by UL (Underwriters Laboratories) for Canada and the United States concerning North American safety and electrical standards governing this product / IFAM Surface-mounted LED Luminaires



For wet and dry locations.



Indicates product has been evaluated using the Standard for Low Voltage Lighting Systems, UL 2108 and the United States requirements from the Standard for LED Light Sources for use in Lighting Products, UL 8750. CNL indicates investigation to CSA Standard for Luminaires, C22.2 No. 250.0, and CSA Standard for General Requirements for Luminaires C22.2 No. 9.



5 year limited warranty on aluminum profiles.



The LED engine can be inserted into a resistant silicone sheath, making it waterproof, with an IP68 ingress protection rating.



Designed to give a uniform light without hot spots, with an opal or prime lens and a LED engine of 120 LEDs per meter or more.



Designed to allow CNC machining for a more extensive customization.



Sets of endcaps and brackets are also available with screws and bolts in stainless steel.



Choice of custom colors available on special order (minimum quantities required, please contact our specialists for details).



Standard finishings (Wood Series).



Standard plaster finishing (Gypsum Series).



For each of our Lumentruss luminaire that's made with recycled wood from Quebec, a tree will be planted. Help us help the environment!



Products that meet verified carbon standards by not having travelled more than 500 kilometers in their manufacturing process, thus promoting a sustainable development. We are committed to meet 2020 global carbon emission reduction goals while promoting renewable energy projects. We care about climate change and global warming.



California Title 24 Building Energy Efficiency Standards are designed to ensure new and existing buildings achieve energy efficiency and preserve outdoor and indoor environmental quality.



Designed to be levelled to the wall surface using joint compound.



Designed to assemble a non-linear luminaire; L-shaped, square, rectangular, etc.



Designed with a device that automatically switches the light on and off.



WARNING


Important electrical notice

1. Use only certified Class II components not exceeding 30V DC or 15V AC for installation in wet locations, and a maximum of 60V DC or 42.4V AC for installation in a dry or humid area.
2. Do not exceed 5 amps per circuit from 12VDC or 24VDC, for compliance with Class 2 standards of the American and Canadian electrical codes.
3. Products must be installed in full accordance with applicable electrical and building codes and regulations applicable. Installation should be performed by a qualified electrician in accordance with electrical standards and relevant local codes.

HOW TO ORDER

Example

For each of the available profiles, you will get a presentation page followed by another one containing a detailed list of all compatible components. By referring to the example provided at the bottom of this page, choose the parts needed and indicate them using the quick order codes provided below the components' descriptions.


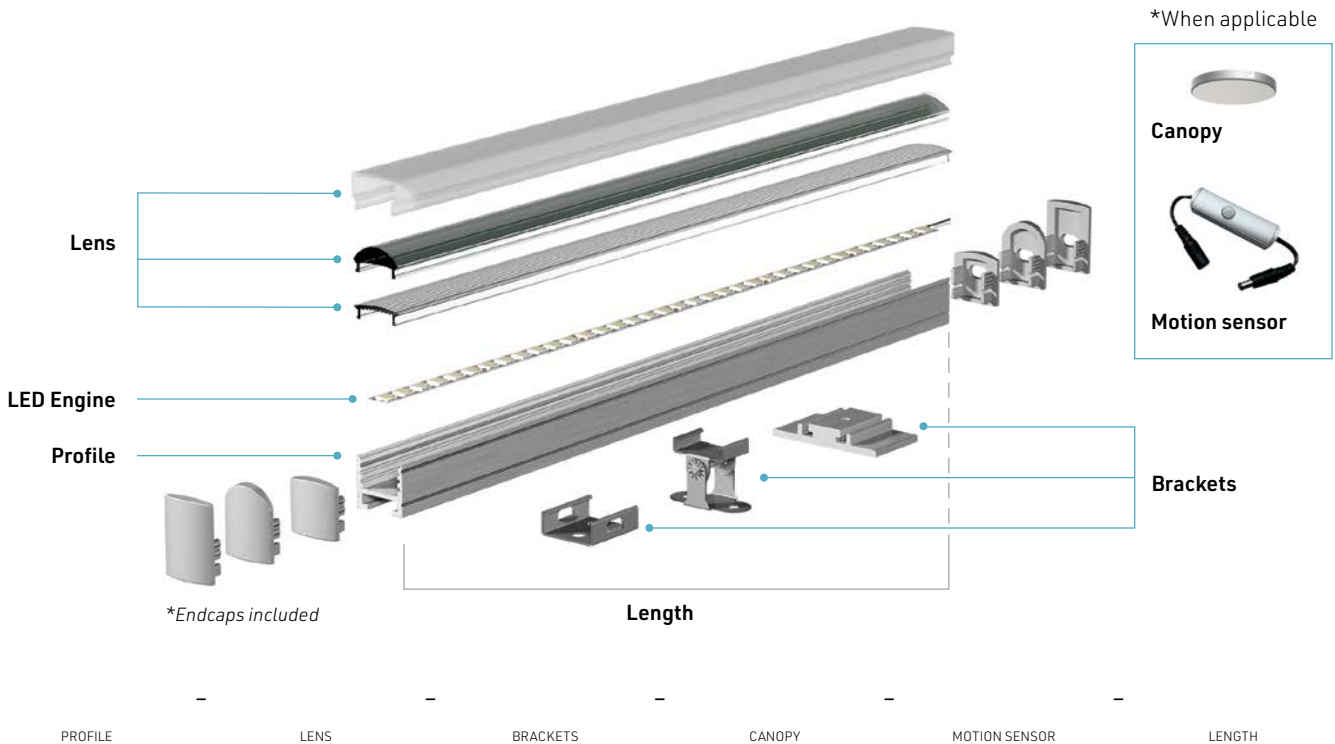


***NOTE:** By default, LumenTruss will install the appropriate endcaps according to options chosen. No endcaps option is available if mentioned when ordered.

Ordering example

To order a linear lighting fixture using a single LED engine, you can choose a profile from the 1000 Series. For a swiveling floodlight with a narrow beam (featured on the right), you can choose the 1400 profile, a Focus lens and the swivel surface mount. Finally, specify the needed total length of the fixture.

By default, the length is specified in inches, in accordance with North American woodworking standards. However, should you need to specify sizes in any other imperial or metric system units, please make sure to indicate the units used in the last field (length).

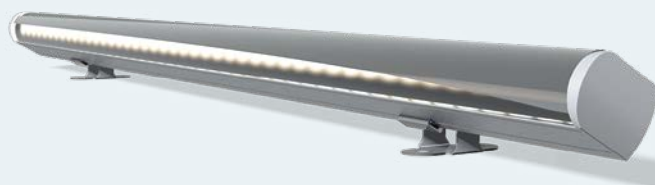

SEND ORDER :

Email : orders@lumentruss.com
 Phone : 1-855-384-3384
 Fax : 514-903-0649



1 0 0 0 S E R I E S






1100 PROFILE

1000 Series



Cross-section dimensions:



THE THINNEST OF THE 1000 SERIES

This profile is **the thinnest of the 1000 Series** being only 6 mm (0.236 inch) thick and 18.7 mm (0.736 inch) wide, and is compatible with most of our LED engines. Perfect for tight spots, it will be very discreet and will stand out.

FEATURES

- The most compact profile of the 1000 Series, only 6mm thick.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8 inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS


















LED ENGINE COMPATIBILITY












Compatible with LED engines up to **14mm** wide.

LINEAR WEIGHT

0.060 lbs/ft, 0.089 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1100 - 1100 Profile, alu</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>  <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p>  <p>OX3D - Square 3D, Optiflex</p>  <p>OP3D - Square 3D, Opal</p>  <p>NO - No lens</p>	 <p>FL - Flat bracket</p>  <p>45 - 45° Corner bracket</p>  <p>SW - Swivel bracket 180°</p>  <p>Easy beam angle adjustment</p>  <p>3M - Mounting tape, double face</p>  <p>NO - No mounting hardware</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
1100			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

1200 PROFILE

1000 Series



Cross-section dimensions:



LIGHTING WITHOUT HOT SPOTS!

This profile is designed to ensure that the LED source is invisible, offering uniform and soft lighting for the eyes. A compact and versatile luminaire!

FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY
















IP22: Compatible with LED engines up to **14mm** wide.











IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.099 lbs/ft, 0.148 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	MOTION SENSORS*	LENGTH
 <p>1200 - 1200 Profile, alu</p>	 <p>CL - Clear lens</p>	 <p>FL - Flat bracket</p>	 <p>SEN1 - 30 sec. Embedded</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1201 - 1200 Profile, black</p>	 <p>SP - Spread lens</p>	 <p>45 - 45° Corner bracket</p>	 <p>SEN2 - 30 sec. Outside extrusion</p>	
 <p>1202 - 1200 Profile, white</p>	 <p>OX - Optiflex lens</p>	 <p>SW - Swivel bracket 180°</p>	 <p>SEN3 - 4 min. Embedded</p>	
 <p>1203 - 1200 Profile, champagne</p>	 <p>OP - Opal lens</p>	 <p>Easy beam angle adjustment</p>	 <p>SEN4 - 4 min. Outside extrusion</p>	
 <p>120X - 1200 Profile, custom color</p> <p>IMPORTANT: Give RAL color № See Appendix 1 on page 158</p> <p>RAL NUMBER</p>	 <p>PR - Prime lens</p>		 <p>3M - Mounting tape, double face</p>	
	 <p>FO - Focus lens</p> <p>NO - No lens</p>	 <p>NO - No mounting hardware</p>	<p>*NOTES</p> <p>All motion sensors: Max 36W/12V or 72W/24V</p>	
PROFILE	LENS	MOUNTING HARDWARE	MOTION SENSOR	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: IP68 not available with motion sensor option.</p> <p>WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <p>TITLE 24</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

1300 PROFILE

1000 Series



Cross-section dimensions:

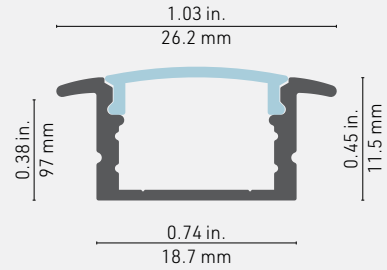

A COMPACT AND RECESSED PROFILE

Here is a **compact and recessed** profile allowing you to make the LED light source invisible. The edges on each side of this extrusion allow for a recessed installation, while having understated style with its discreet and neat appearance.

FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS





LED ENGINE COMPATIBILITY












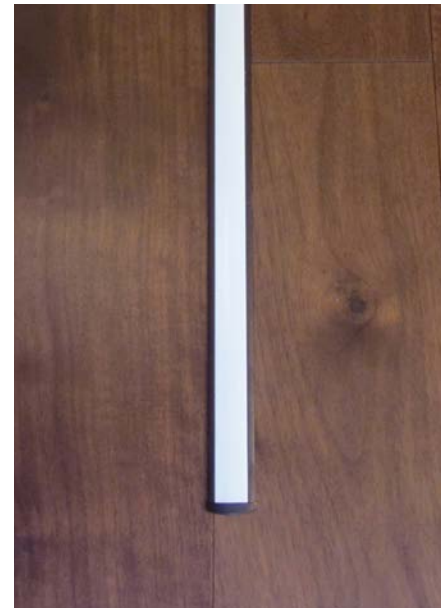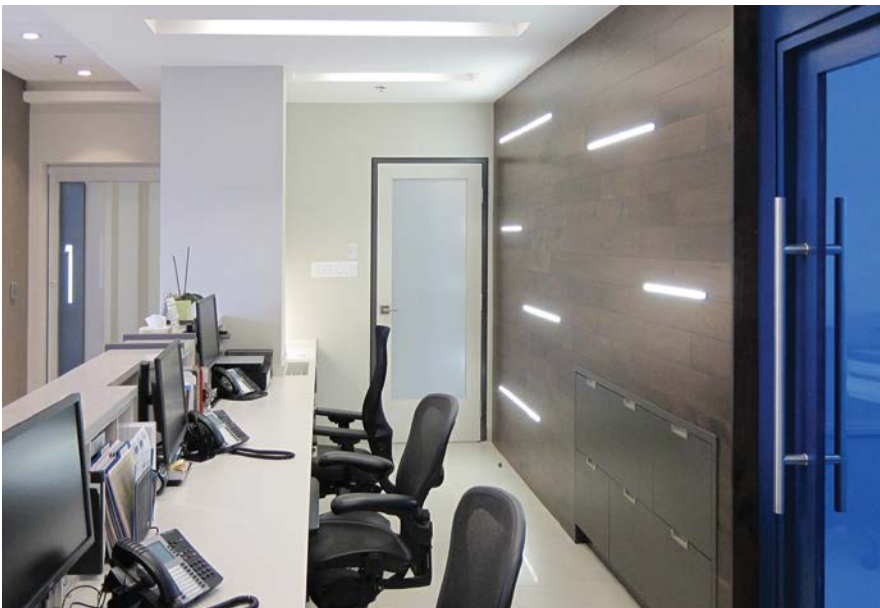



IP22: Compatible with LED engines up to **14mm** wide.











IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.115 lbs/ft, 0.171 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	MOTION SENSORS*	LENGTH
 <p>1300 - 1300 Profile, alu</p>	 <p>CL - Clear lens</p>	 <p>FL - Flat bracket</p>	 <p>SEN1 - 30 sec. Embedded</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1301 - 1300 Profile, black</p>	 <p>SP - Spread lens</p>	 <p>3M - Mounting tape, double face</p>	 <p>SEN3 - 4 min. Embedded</p>	
 <p>130X - 1300 Profile, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin: 5px 0;"></div> <p>RAL NUMBER</p>	 <p>OX - Optiflex lens</p>	 <p>NO - No mounting hardware</p>	 <p>NO - No sensor</p>	
	 <p>OP - Opal lens</p>		<p>*NOTES</p> <p>All motion sensors: Max 36W/12V or 72W/24V</p>	
	 <p>PR - Prime lens</p>			
	 <p>NO - No lens</p>			
PROFILE	LENS	MOUNTING HARDWARE	MOTION SENSOR	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: IP68 not available with motion sensor option.</p> <p>WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

1400 PROFILE

1000 Series



Cross-section dimensions:



SAY HELLO TO VERSATILITY!

In addition to offering even lighting, the 1400 allows beam adjustment¹ as well as a considerably larger choice of installation options². This profile also offers a wide variety of installation, **from fixed to suspended mounting**.

(1) With an aluminum heatsink rail insert installed at different positions. (2) More than 500 configurations are possible!

FEATURES

- The support rail offers the largest range of installation and assembly.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories (over 40 options).
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY






























IP22: Compatible with LED engines up to **14mm** wide.











IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.154 lbs/ft, 0.229 kg/m (without lens or insert)



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	MOTION SENSORS*	LENGTH
 <p>1400 - 1400 Profile, alu</p>	 <p>CL - Clear lens</p>	 <p>FL - Flat bracket</p>	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	 <p>SEN1 - 30 sec. Embedded</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1401 - 1400 Profile, black</p>	 <p>SP - Spread lens</p>	 <p>45 - 45° Corner bracket</p>	<p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	 <p>SEN2 - 30 sec. Outside extrusion</p>	
 <p>1402 - 1400 Profile, white</p>	 <p>OX - Optiflex lens</p>	 <p>SW - Swivel bracket 180°</p>	 <p>Easy beam angle adjustment</p>	 <p>SEN3 - 4 min. Embedded</p>	
 <p>1403 - 1400 Profile, champagne</p>	 <p>OP - Opal lens</p>	 <p>PH - Phantom bracket</p>		 <p>SEN4 - 4 min. Outside extrusion</p>	
 <p>1404 - 1400 Profile, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-top: 5px;"></div> <p>RAL NUMBER</p>	 <p>PR - Prime lens</p>	 <p>MG - Magnetic kit</p>	<p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>	<p>NO - No sensor</p>	
	 <p>FO - Focus lens</p>	 <p>WSB - Surface 2-side bracket</p>	<p>NO - No canopy</p>	<p>*NOTES</p> <p>All motion sensors: Max 36W/12V or 72W/24V</p>	
	 <p>OX3D - Square 3D, Optiflex</p>	 <p>SWS - Surface 1-side bracket</p>	<p>NO - No mounting hardware</p>		
	 <p>OP3D - Square 3D, Opal</p>	 <p>AWS - Surface 90° bracket</p>			
	<p>NO - No lens</p>	 <p>W45 - Surface 45° bracket</p>			
		 <p>SUS - 1400 suspension kit</p>			
		<p>NO - No mounting hardware</p>			


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 FT NO - No lead</p>	<p>I - IP22 indoor dry location 0 - IP68 wet/damp location</p> <p>Note: IP68 not available with motion sensor option. WarmDim is only available in IP22.</p>	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <p>TITLE 24 cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

1450 PROFILE - REGULAR LED ENGINE

1000 Series



Cross-section dimensions:



SAY HELLO TO VERSATILITY VERSION 2.0!

This profile is the biggest in size from our 1000 series line of product. It **has been specially designed for outdoor use** and can house all the different IP68 lumen Packages we offer. With a new sliding lens design, this profile offers a wide variety of installation, from fixed to suspended mounting.

FEATURES

- The support rail offers a large range of installation and assembly both fixed and suspended.
- NEW slidable lens system.
- Designed to give a uniform light without hot spots with a prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS




LED ENGINE COMPATIBILITY









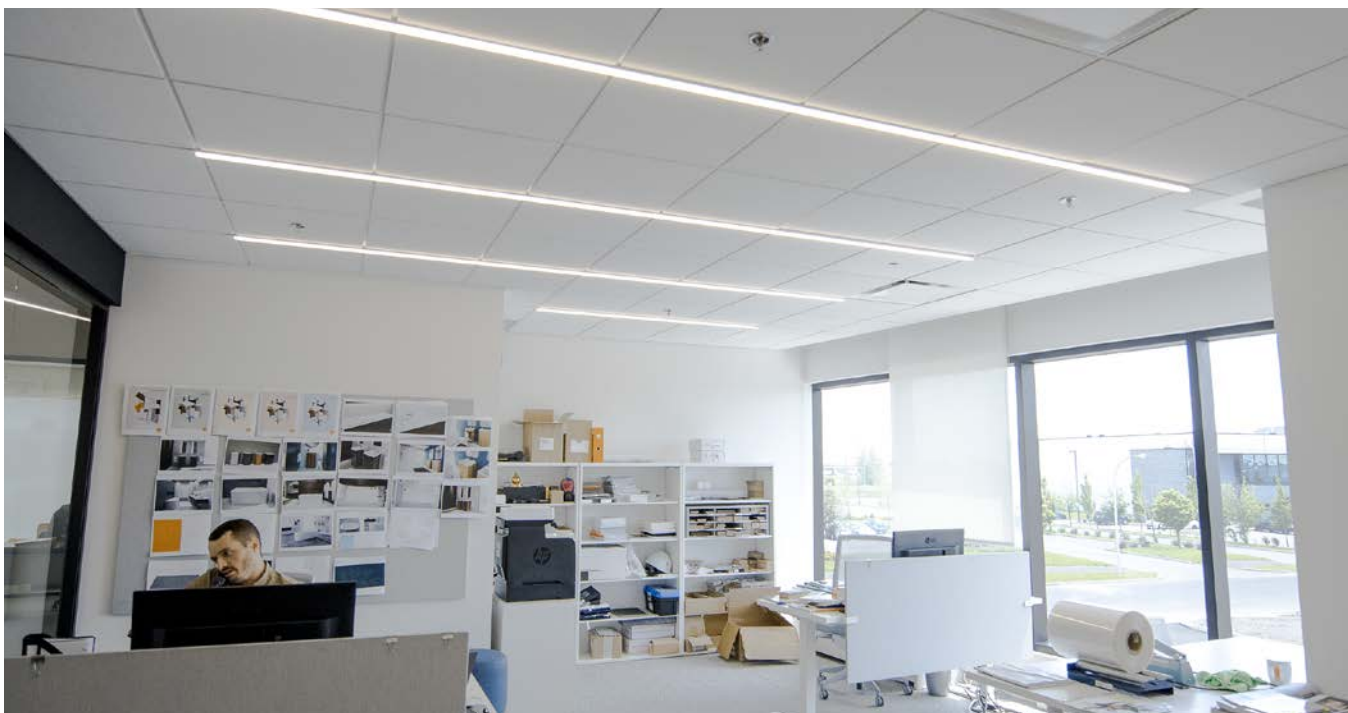














IP22: Compatible with LED engines up to **14mm** wide.












IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.23 lbs/ft, 0.35 kg/m (without lens or insert)



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 1450 - Series 1400, alu	 PR - Prime lens	 PH - Phantom bracket	<p>NOTE: Only available with SUS bracket (suspension)</p>  Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White	 HER - High efficiency reflector	Custom length by sections of 2 to 240 inches (6m).
 1451 - Series 1400, black	 FO - Focus lens	 MG - Magnetic kit	 Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White	 NO - No option	
 1452 - Series 1400, white	 OP3D - Square 3D, Opal	 WSB - Surface 2-side bracket	 Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White	 NO - No canopy	
 1453 - Series 1400, champagne	 NO - No lens	 AWS - Surface 90° bracket		 NO - No mounting hardware	
 145X - Series 1400, custom color IMPORTANT: Give RAL color Ne See Appendix 1 on page 158 RAL NUMBER		 SW - Swivel bracket 180°	 SUS - 1400 suspension kit		

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI Note: Not applicable for WarmDim & RGB color temperatures	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 FT NO - No lead	I - IP22 indoor dry location O - IP68 wet/damp location Note: WarmDim is only available in IP22.	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver	*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver 


COLOR TEMPERATURE CCT LUMEN PACKAGE LEAD IN LEAD OUT USAGE POWER SUPPLY/CONTROL

1450 PROFILE - LUXLINE 120V

1000 Series



Cross-section dimensions:



SAY HELLO TO VERSATILITY VERSION 2.0!

This profile is the biggest in size from our 1000 series line of product. It has been specially designed to be used with our new **LuxLine** series of 120V LED engine tape. With a new sliding lens design, this profile offers a wide variety of installation, from fixed to suspended mounting.

FEATURES

- The support rail offers a large range of installation and assembly both fixed and suspended.
- NEW slidable lens system.
- Designed to give a uniform light without hot spots with a prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS

























LED ENGINE COMPATIBILITY







Compatible with LED engines up to **14mm** wide.

LINEAR WEIGHT


0.23 lbs/ft, 0.35 kg/m (without lens or insert)



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 <p>1450 - Series 1400, alu</p>	 <p>PR - Prime lens</p>	 <p>PH - Phantom bracket</p>	 <p>NOTE: Only available with SUS bracket (suspension)</p>	 <p>HER - High efficiency reflector</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1451 - Series 1400, black</p>	 <p>NO - No lens</p>	 <p>MG - Magnetic kit</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	 <p>NO - No option</p>	
 <p>1452 - Series 1400, white</p>		 <p>WSB - Surface 2-side bracket</p>	 <p>NO - No canopy</p>		
 <p>1453 - Series 1400, champagne</p>	 <p>Easy beam angle adjustment</p>	 <p>SWS - Surface 1-side bracket</p>			
 <p>145X - Series 1400, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-top: 5px;"></div> <p>RAL NUMBER</p>		 <p>AWS - Surface 90° bracket</p>			
		 <p>W45 - Surface 45° bracket</p>			
		 <p>SW - Swivel bracket 180°</p>			
		 <p>SUS - 1400 suspension kit</p>			
		 <p>NO - No mounting hardware</p>			

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	JUMPER	USAGE	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  62 - 6200K	LUX - 350 LM / 4.0W FT / 90+CRI	PG - Plug-in 47" HW - Hardwire 118"	JP6 - Jumper 6" JP12 - Jumper 12" NO - No jumper	2 - IP65 indoor	The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and transluency conversion factors. <div style="border: 1px solid gray; padding: 2px; display: inline-block;"> TITLE 24 <small>COMP. UNIT</small> </div>
COLOR TEMPERATURE CCT	LUX	LEAD IN LEAD OUT	JUMPER QTY	IP65	

- ### LUXLINE FEATURES
- LumenTruss Driverless technology.
 - Direct line voltage.
 - Constant current IC providing uniform intensity over the entire run.
 - Uses North American power plug with built-in fuse or hardwire.
 - Order in lengths of 1 FT.
 - 164 FT maximum run.
 - Ultra high lumen output.
 - Architectural grade.
 - PVC coating (not recommended for direct sunlight).
 - Life of 50,000 hours /3 year warranty.
 - LED type: 3056
 - WARNING: Do not cut AC plug.

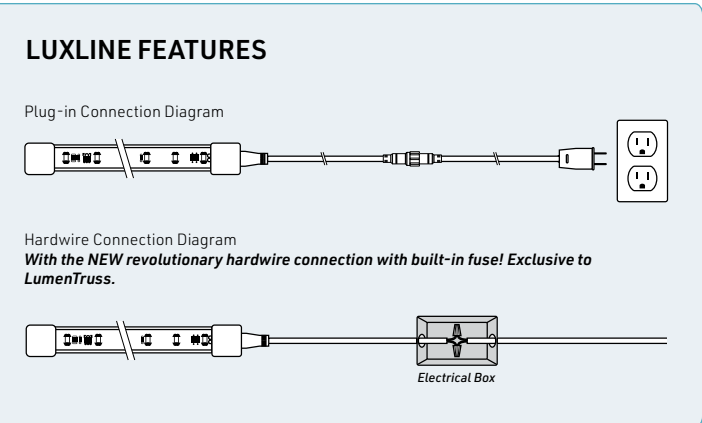


1500 PROFILE

1000 Series



Cross-section dimensions:

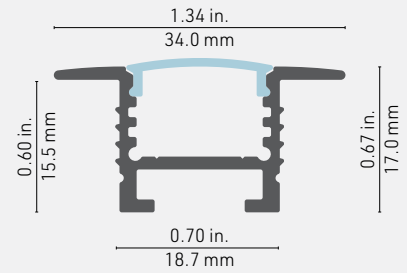

RECESSED PROFILE WITH ADJUSTABLE BEAM!

The edge design of the 1500 profile harmonizes with your décor and allows for a very secure recessed installation and provides lighting without hot spots. Use with our spring brackets for a fast and easy installation.

FEATURES

- The support rail offers the largest range of installation and assembly.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY















IP22: Compatible with LED engines up to **14mm** wide.

IP68: Compatible with LED engines up to **10mm** wide.











LINEAR WEIGHT

0.192 lbs/ft, 0.286 kg/m (without lens or insert)



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1500 - 1500 Profile, alu</p>	 <p>CL - Clear lens</p>	 <p>FL - Flat bracket</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1502 - 1500 Profile, white</p>	 <p>SP - Spread lens</p>	 <p>PH - Phantom bracket</p>	
 <p>150X - 1500 Profile, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin: 5px 0;"></div> <p>RAL NUMBER</p>	 <p>OX - Optiflex lens</p>	 <p>MG - Magnet kit</p>	
	 <p>OP - Opal lens</p>	 <p>SP - Spring bracket</p>	
	 <p>PR - Prime lens</p>	 <p>NO - No mounting hardware</p>	
	 <p>NO - No lens</p>		

PROFILE	LENS	MOUNTING HARDWARE	LENGTH
---------	------	-------------------	--------


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location</p> <p>Note: WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

1650 PROFILE

1000 Series



Cross-section dimensions:

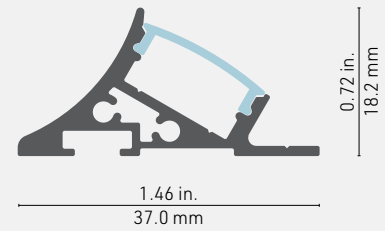

PRACTICAL AND SLEEK

The 1650 profile is your best choice for **product display**. It offers lighting at a 30-degree angle, so you can cover all of the items on your shelves or racks and bring them centerstage. The smooth curved profile adds an extra accent in style. Use it with a clear lens to maximize the light output, or with an Optiflex or Opal lens for no hot spots from any angle.

FEATURES

- Profile designed to light items on shelves and displays.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY













IP22: Compatible with LED engines up to **14mm** wide.

IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT


0.232 lbs/ft, 0.345 kg/m (without lens)









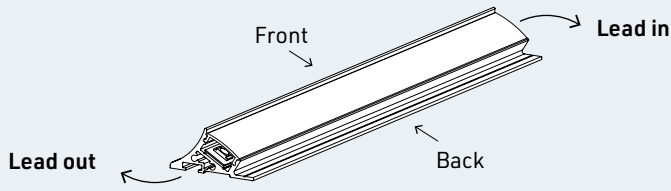



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1650 - 1650 Profile, alu incl. 3M mounting tape</p>	 <p>CL - Clear lens</p>	 <p>3M - Mounting tape, double face</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1651 - 1650 Profile, black incl. 3M mounting tape</p>	 <p>SP - Spread lens</p>	 <p>NO - No mounting hardware</p>	
 <p>1652 - 1650 Profile, white incl. 3M mounting tape</p>	 <p>OX - Optiflex lens</p>		
 <p>165X - 1650 Profile, custom color incl. 3M mounting tape</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-top: 5px;"></div> <p>RAL NUMBER</p>	 <p>OP - Opal lens</p>		
	 <p>PR - Prime lens</p>	 <p>NO - No lens</p>	

PROFILE	LENS	MOUNTING HARDWARE	LENGTH
---------	------	-------------------	--------

***NOTE:** This profile has a direction. Please refer to the graphic on the right to figure out the sides of lead in, lead out wires.



COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>


COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	LEAD OUT	USAGE	POWER SUPPLY/CONTROL
-----------------------	---------------	---------	----------	-------	----------------------

1690 PROFILE

1000 Series



Cross-section dimensions:

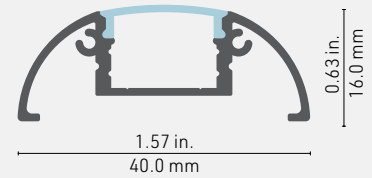

GREAT FOR UNDER CABINET LIGHTING

A rounded profile especially **designed to conceal mounting hardware and wires**, the 1690 can serve well for under cabinet lighting, or on any other surface as a mural fixture.

FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY













IP22: Compatible with LED engines up to **14mm** wide.











IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.204 lbs/ft, 0.304 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1690 - 1690 Profile, alu</p>	 <p>CL - Clear lens</p>	 <p>FL - Flat bracket</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>1691 - 1690 Profile, black</p>	 <p>SP - Spread lens</p>	 <p>NO - No mounting hardware</p>	
 <p>1692 - 1690 Profile, white</p>	 <p>OX - Optiflex lens</p>		
 <p>169X - 1690 Profile, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-top: 5px;"></div> <p>RAL NUMBER</p>	 <p>OP - Opal lens (dot free)</p>		
	 <p>PR - Prime lens (dot free)</p>	 <p>NO - No lens</p>	
PROFILE	LENS	MOUNTING HARDWARE	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; width: fit-content;"> <p>TITLE 24 cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

1800 PROFILE

1000 Series



Cross-section dimensions:



EASIEST BIDIRECTIONAL LIGHT WASHING EVER

Here is a solution for the **easiest bidirectional light washing** ever. Whether illuminating art from behind the frame, adding a halo around a panel, lighting a cove or a vanity mirror from the perimeter, the 1800 profile will do a rock-solid job, fine-tuned to your liking, while staying, well, "behind the curtains."

FEATURES

- An axially-symmetrical double profile accepting 2 light sources, projecting the light laterally in both directions.
- Developed for a concealed installation between two parallel surfaces.
- The protruding edges allow for a solid attachment to most surfaces and/or panels, permanently via your choice of standard hardware, or easily removable when using our standard WB wall mounting brackets with a lightweight front panel.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy, increasing heat dissipation and the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

















IP22: Compatible with LED engines up to **14mm** wide.

IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.483 lbs/ft, 0.719 kg/m (without lens)



PROFILE	INSIDE LENS	OUTSIDE LENS	MOUNTING HARDWARE	LENGTH
 <p>1800 - 1800 Profile, alu</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>  <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p>  <p>FO - Focus lens</p>  <p>NO - No lens</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>  <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p>  <p>FO - Focus lens</p>  <p>NO - No lens</p>	 <p>WB - 6" wall mount bracket, alu</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">1800</div> <p>PROFILE</p>	<p>LENS INSIDE</p>	<p>LENS OUTSIDE</p>	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">WB</div> <p>MOUNTING HARDWARE</p>	<p>LENGTH</p>

COLOR TEMPERATURE	LM PACKAGE IN/OUT*	LEAD IN/OUT	USAGE	POWERSUPPLY/CONTROL**	*NOTES
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 53 - 5300K (LHP only) 62 - 6200K (LP only) WD - WarmDim RGB - RGB RGBW - RGBW 	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>1 - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: 5px auto;"> <p>TITLE 24</p> </div>
<p>CCT INSIDE CCT OUTSIDE</p>	<p>LM INSIDE LM OUTSIDE</p>	<p>LEAD IN LEAD OUT</p>	<p>USAGE</p>	<p>POWER SUPPLY/CONTROL</p>	



2000 SERIES






2000 PROFILE

2000 Series



Cross-section dimensions:



WELL FOCUSED ON THE TASK!

Offering lighting without hot spots at a **45-degree** angle from a corner, the 2000 Series excels at maximizing appeal of the products in POP stands, while maintaining a minimalist style.

FEATURES

- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **14mm** wide.












IP68: Compatible with LED engines up to **10mm** wide.











LINEAR WEIGHT

0.117 lbs/ft, 0.175 kg/m (without lens)



Boutique Exclusivity - Project Manager: J. J. Design

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>2000 - 2000 Profile, alu</p>	 <p>CLR - Clear lens, round</p>	 <p>45 - 45° corner bracket</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>OXR - Optiflex lens, round</p>	 <p>3M - Mounting tape, double face</p>	
	 <p>OPR - Opal lens, round</p>	 <p>NO - No mounting hardware</p>	
	 <p>PRR - Prime lens, round</p>		
	 <p>OXS - Optiflex lens, square</p>		
	 <p>OPS - Opal lens, square</p>		
	 <p>NO - No lens</p>		
2000			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p> <p>Note: WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	




3000 SERIES






3100 PROFILE

3000 Series

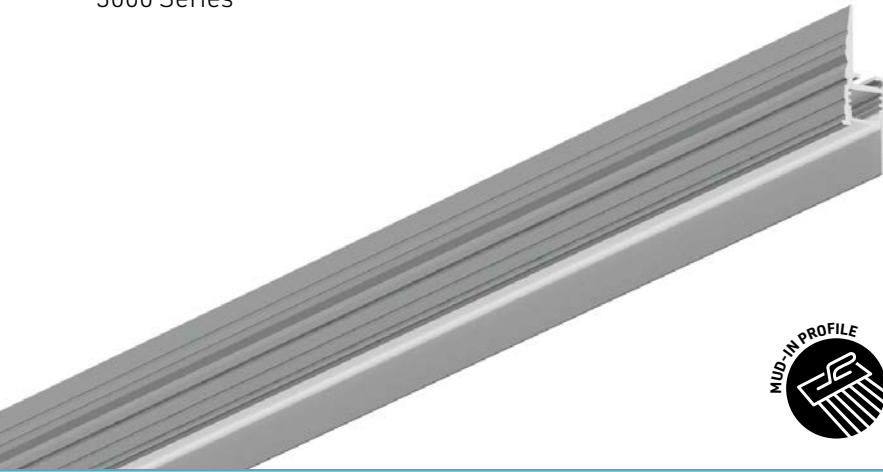

Cross-section dimensions:



REDEFINES CONTOUR LIGHTING!

Ideal for night lighting and dramatically enhancing the perimeter of a room, the new 3100 aluminum profile is recessed and provides uniform contour lighting, downward, at 90°. It fits perfectly with standard gypsum panels for a seamless finish. This wall application meets aesthetic and safety needs in areas with low levels or poor lighting. Perfect for lighting a corridor in a residence or a hotel!

FEATURES

- Designed to be recessed and provide uniform contour lighting, downward, at 90 degrees. Indoor use for residential or commercial applications.
- Direct adjustment with standard 1/2 inch gypsum panels and with 5/8 inch gypsum panels.
- Impeccable finish thanks to the grooves that allow the profile to be leveled to the plasterboard using joint compound.
- Available in 96 inch (2.43 m) lengths for easy and accurate on-site installation.
- Equipped with a Prime lens for uniform illumination without light dots and optimal light diffusion.
- 8 mm LED light source: 4.8 W, 9.6 W, and 14.5 W, with 5 color temperatures (2400 K to 4200 K), also available in 10 mm width in 14.4 W-RGB.
- Designed to meet North American woodworking standards.

OPTIONS





LED ENGINE COMPATIBILITY




Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT










0.330lbs/ft, 0.491kg/m (without lens)



PROFILE	LENGTH	LENSES
 <p>3100 QTY - Profile</p>	<p>Available in straight section of 8 feet (96 inches/2.4 m). *Cut on site</p>	 <p>PR - prime lens</p>
<p>QUANTITY</p>	<p>X 96 INCHES</p> <p>LENGTH</p>	<p>INCLUDED</p> <p>WITH EACH PROFILE</p>

JOINERS		
 <p>Type A straight joiner</p>	 <p>Type A horz. 45°/135° joiner</p>	 <p>Type A horz. 90° joiner</p>
<p>QUANTITY</p>	<p>QUANTITY</p>	<p>QUANTITY</p>

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
<p>COLOR TEMPERATURE CCT</p>	<p>LUMEN PACKAGE</p>	<p>LEAD IN LEAD OUT</p>	<p>USAGE</p>	<p>POWER SUPPLY/CONTROL</p>	<p>LED ENGINE LENGTH</p>

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver


TITLE 24

3200 PROFILE

3000 Series



Cross-section dimensions:



With its smooth and curved inner surface, the new 3200 recessed profile allows indirect lighting with a hollow effect, regardless of the height at which it is installed. What's new? The possibility of adding endcaps for a neat and elegant finish. The 3200 is ideal for residential or commercial applications that require high efficiency, safe lighting.

FEATURES

- Direct adjustment with standard 1/2 inch gypsum panels and with 5/8 inch gypsum panels.
- Impeccable finish thanks to the grooves that allow the profile to be leveled to the wall surface using joint compound.
- Available in 96 inch (2.43 m) lengths for easy and accurate on-site installation. Optional endcaps, available.
- Equipped with a Prime lens for uniform illumination without light dots and optimal light diffusion.
- 8 mm LED light source: 4.8 W, 9.6 W, and 14.5 W, with 7 color temperatures (2400K to 6200K), IP22; also available in 10 mm width in 14.4 W-RGB.

OPTIONS





LED ENGINE COMPATIBILITY

Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT










0.330lbs/ft, 0.491kg/m (without lens)



PROFILE	LENGTH	LENSES
 <p>3200 QTY - Profile</p>	<p>Available in straight section of 8 feet (96 inches/2.4 m). *Cut on site</p>	 <p>PR - prime lens</p>
<p>QUANTITY</p>	<p>X 96 INCHES</p> <p>LENGTH</p>	<p>INCLUDED</p> <p>WITH EACH PROFILE</p>

JOINERS		
 <p>Type A straight joiner</p>	 <p>Type A horz. 45°/135° joiner</p>	 <p>Type A horz. 90° joiner</p>
<p>QUANTITY</p>	<p>QUANTITY</p>	<p>QUANTITY</p>


LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver



4000 SERIES

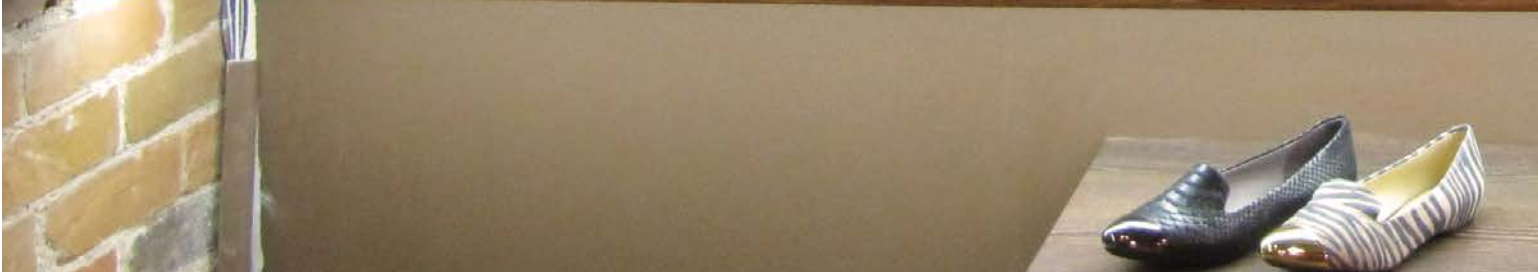




4400 PROFILE

4000 Series



Cross-section dimensions:



ONE OF THE SMALLEST ON THE MARKET


Guaranteed to be discreet! The 4400 profile is reduced to a minimum with its size of less than half an inch, while accepting a good range of LED engines¹.

(1) Accepts LED engines up to 8mm wide.

FEATURES

- Ultra-compact aluminum profile – 12.2mm wide by 12.2mm high (0.5 x 0.5in).
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS












LED STRIP COMPATIBILITY

Compatible with LED strips up to **8mm** wide.

LINEAR WEIGHT

0.108 lbs/ft, 0.160 kg/m



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 4400 - 4400 Profile, alu	 CL - Clear lens	 FL - Flat bracket	Custom length by sections of 2 to 240 inches (6m).
 4401 - 4400 Profile, black	 OX - Optiflex lens	 NO - No mounting hardware	
 440X - 4400 Profile, custom color IMPORTANT: Give RAL color № See Appendix 1 on page 158 <div style="border: 1px solid black; width: 100px; height: 15px; margin-top: 5px;"></div> RAL NUMBER	 OP - Opal lens  NO - No lens		
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

4000


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<div style="display: flex; flex-direction: column; gap: 5px;"> <div> 24 - 2400K</div> <div> 27 - 2700K</div> <div> 30 - 3000K</div> <div> 35 - 3500K</div> <div> 42 - 4200K</div> <div> 53 - 5300K</div> </div>	LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead	I - IP22 indoor dry location	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver	*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver <div style="border: 1px solid black; padding: 2px; display: inline-block;"> TITLE 24 <small>cover.jpg</small> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

4500 PROFILE

4000 Series



Cross-section dimensions:



MEET OUR MAGIC WAND!

A well cherished secret that we just have to brag about. The 4500 is a slim but extremely versatile display solution. With its **ultra-compact size** and its **complete freedom of lighting direction**, and accepting most LED engines¹, you will find many ways to install it with its wide variety of accessories.

(1) Accepts LED engines ranging up to 10mm wide.

FEATURES

- Ultra-compact size with a diameter of only 16mm (5/8in).
- All of the 4500 brackets allow adjusting lighting direction along the axis as desired.
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS










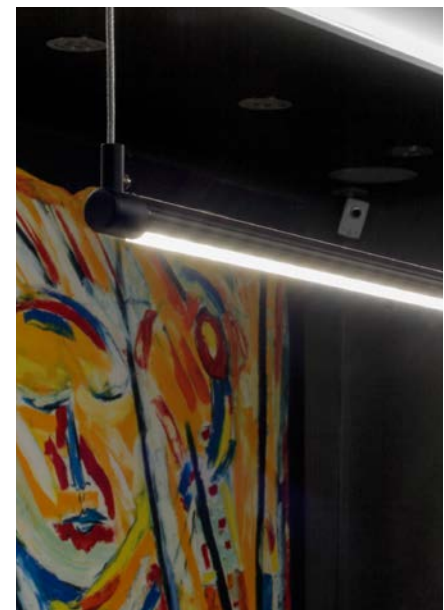













LED ENGINE COMPATIBILITY











Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.147 lbs/ft, 0.218 kg/m



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>4500 - 4500 Profile, alu</p>	 <p>CL - Clear lens</p>	 <p>FL - Flat bracket</p>	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 2 to 60 inches (1.5m).</p>
 <p>4501 - 4501 Profile, black</p>	 <p>OX - Optiflex lens</p>	 <p>U0 - "U" bracket, Alu</p>  <p>P0 - "P" bracket, Alu</p>	 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
 <p>450X - 4501 Profile, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-top: 5px;"></div> <p>RAL NUMBER</p>	 <p>OP - Opal lens</p>	 <p>VS - Arm kit vertical surface Maximum = 12"</p>  <p>VI - Arm kit vertical insert Maximum = 12"</p>	 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>	
	 <p>NO - No lens</p>	 <p>HS - Arm kit horizontal surface Maximum = 12"</p>  <p>HI - Arm kit horizontal insert Maximum = 12"</p>	 <p>NO - No canopy</p>	
		 <p>SUS - 4500 endcap suspension kit with 15ft. coax. cable</p>  <p>NO - No mounting hardware</p>		
PROFILE	LENS	MOUNTING HARDWARE	CANOPY	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	




5000 SERIES






5000 PROFILE

5000 Series

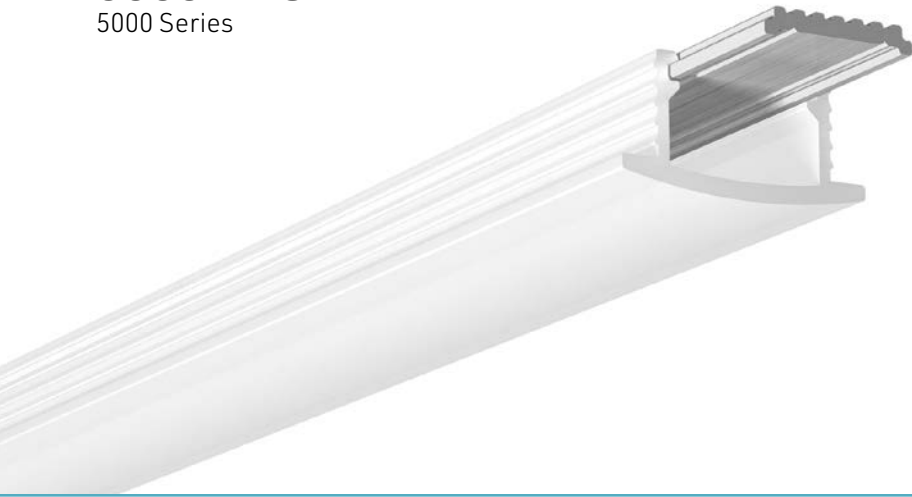

Cross-section dimensions:

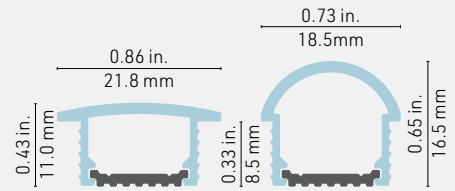

SIMPLICITY ITSELF!

The 5000 consists of an **aluminum heatsink base** inserted into a **flexible recessed lens** with gripping sides. It allows for a very **simple installation**, with the assembly inserted into the recess and staying in place due to the gripping ribbed lens sides. The 5/8" wide and 3/8" deep recess is a direct fit for North American cabinetry, closet, or mural applications, besides being economical and providing lighting without hot spots.

FEATURES

- Designed to give a uniform light without hot spots with the opal round lens.
- The 5200 (round) lens has a 0.31 inch (8mm) wall offset, while the 5300 (flanged) lens stands out only 1/10" (2.5mm).
- The LED heatsink base is made of aluminum for improved heat dissipation.
- The recess hole should be 5/8" (15.9mm) wide and 8.5mm (3/8 inch) deep minimum.
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8 inch) LED engine or less.
- Designed to meet North American woodworking standards.

OPTIONS




LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **10mm** wide.

IP68: Compatible with LED engines up to **8mm** wide.





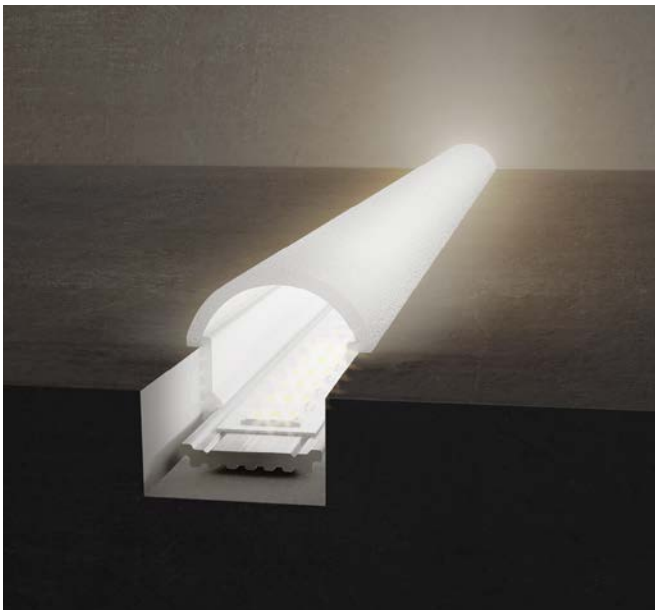




LINEAR WEIGHT

0.035 lbs/ft, 0.052 kg/m (without lens)
0.035 lbs/ft, 0.052 kg/m (with 5300 flanged lens)
0.035 lbs/ft, 0.052 kg/m (with 5200 round lens)




PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>5000 - 5000 Heatsink profile, alu</p>	 <p>OPF - Opal lens, flanged</p>  <p>OPR - Opal lens, round</p>  <p>NO - No lens</p>	 <p>3M - Mounting tape, double face</p>  <p>NO - No mounting hardware</p>	<p>Custom length by sections of 96 inches (2.44m).</p>
5000			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

5000


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

5350 PROFILE

5000 Series

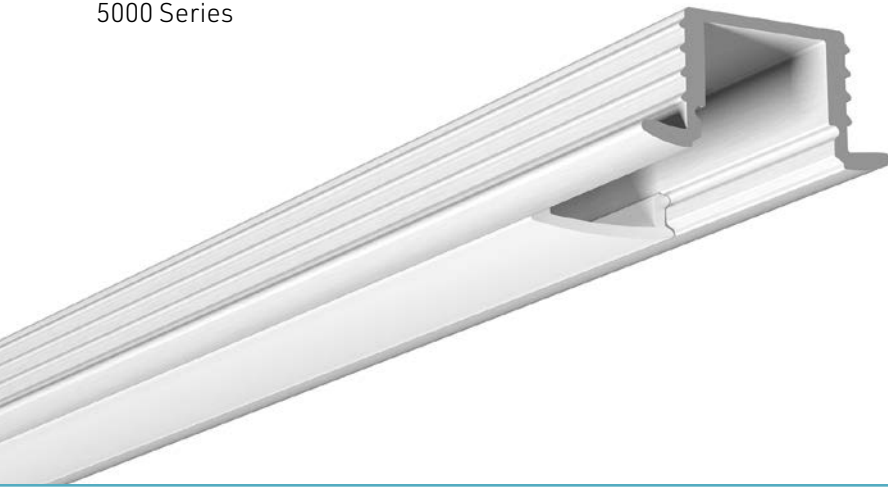

Cross-section dimensions:

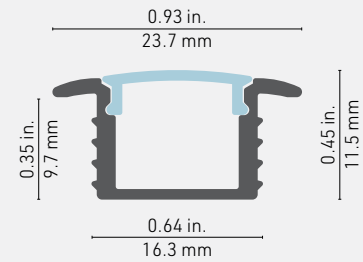

A COMPACT RECESSED PROFILE

Here is a **compact recessed** profile allowing you to make the light source and the LED invisible. The edges on each side of this extrusion allow a recessed installation, giving it style with a discreet and neat appearance. This profile will **fit in a 5/8 inch** deep recess.

FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens.
- Designed for a snug fit in a 5/8-inch (16mm) wide, 3/8-inch (10mm) deep recess.
- Custom length by sections of 96 inches (2.44m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY










IP22: Compatible with LED engines up to **10mm** wide.

IP68: Compatible with LED engines up to **8mm** wide.











LINEAR WEIGHT

0.110 lbs/ft, 0.164 kg/m (without lens)




PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 5350 - 5350 Profile, alu	 OP - Opal lens	 3M - Mounting tape, double face	Custom length by sections of 2 to 96 inches (2.44m).
 5351 - 5350 Profile, black	 PR - Prime lens	 NO - No mounting hardware	
 5352 - 5350 Profile, white	 NO - No lens		
 535X - 5350 Profile, custom color IMPORTANT: Give RAL color № See Appendix 1 on page 158			
<input type="text" value="RAL NUMBER"/> RAL NUMBER			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

5000


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  RGB - RGB  RGBW - RGBW	LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI Note: Not applicable for WarmDim & RGB color temperatures	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead	I - IP22 indoor dry location 0 - IP68 wet/damp location	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver	*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

5450 PROFILE

5000 Series

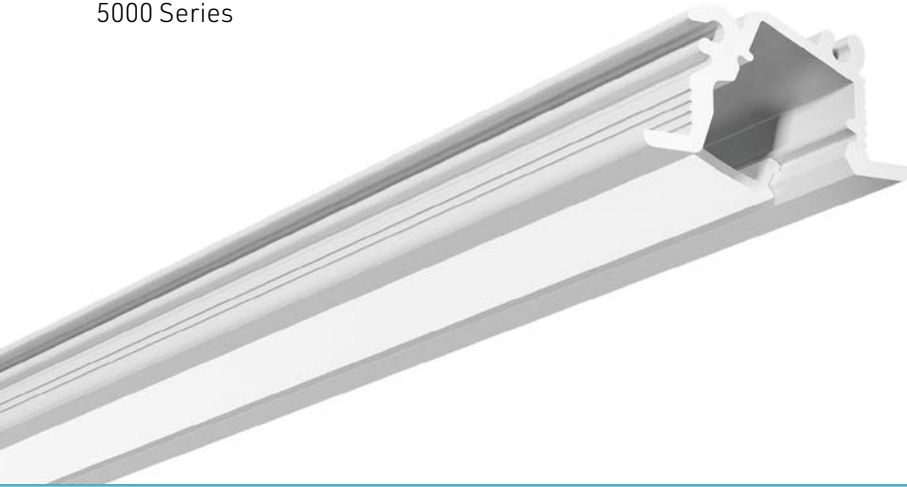

Cross-section dimensions:

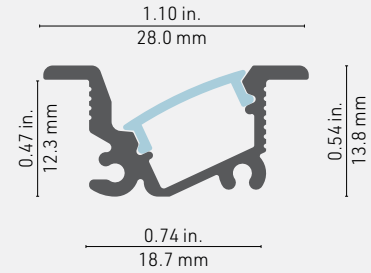

PERFECT FOR CABINETRY

The 5450 is a **compact recessed LED lighting profile** for cabinetry and other wood furnishing projects, directing the light beam at a **25-degree angle** which allows you to light the cabinet contents from the edge. This profile will **fit in a 5/8 inch** deep recess.

FEATURES

- Recessed installation inside a 3/4-inch (19mm) wide and 1/2-inch (13mm) deep recess.
- Custom length by sections of 96 inches (2.44m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY





IP22: Compatible with LED engines up to **10mm** wide.

IP68: Compatible with LED engines up to **8mm** wide.











LINEAR WEIGHT

0.163 lbs/ft, 0.242 kg/m (without lens)



PROFILE	LENSES	LENGTH
 <p>5450 - 5450 Profile, alu</p>	 <p>OP - Opal lens</p>  <p>PR - Prime lens</p>  <p>NO - No lens</p>	<p>Custom length by sections of 2 to 96 inches (2.44m).</p>
<div style="border: 1px solid black; padding: 5px; display: inline-block;">5450</div> <p>PROFILE</p>	<div style="border: 1px solid black; width: 100px; height: 15px; display: inline-block;"></div> <p>LENS</p>	<p>LENGTH</p>

5000


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location O - IP68 wet/damp location <p>Note: WarmDim is only available in IP22.</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid gray; padding: 2px; display: inline-block;"> <p>TITLE 24 COVER</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

5560 PROFILE

5000 Series



Cross-section dimensions:



INSTALLS ON CURVED OR UNEVEN SURFACES!

The 5560 profile allows integrating linear LED lighting on **curved or uneven surfaces**. Its low profile (1/5" including lens), and a thickness of less than 1/32" (0.75mm), allows for **effortless bending and installation** using plain mounting tape.

FEATURES

- Custom length by sections of 96 inches (2.44m).
- Thin, lightweight and flexible, can be easily bent over curved or uneven surfaces.
- Can be installed using adhesives/mounting tape.
- Made of ALCOA 6063-T5 aluminum alloy, increasing heat dissipation and the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS








LED ENGINE COMPATIBILITY

Compatible with LED engines up to **12mm** wide.











LINEAR WEIGHT

0.033 lbs/ft, 0.049 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 5560 - 5560 Profile, alu	 OP - Opal lens  NO - No lens	 3M - Mounting tape, double face  NO - No mounting hardware	Custom length by sections of 2 to 96 inches (2.44m).
5560	-	-	-
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

5000

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE 24 cover.jpg</p> </div>
-	-	-	-	-	-
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	IP22	POWER SUPPLY/CONTROL	



7000 SERIES





MULTIMÉDIA

Maa

RWANDA 1994

SAUL


Zombikönyvek
X-MEN

POLICIERS


Sally Lockhart

7400 (7420) PROFILE

7000 Series

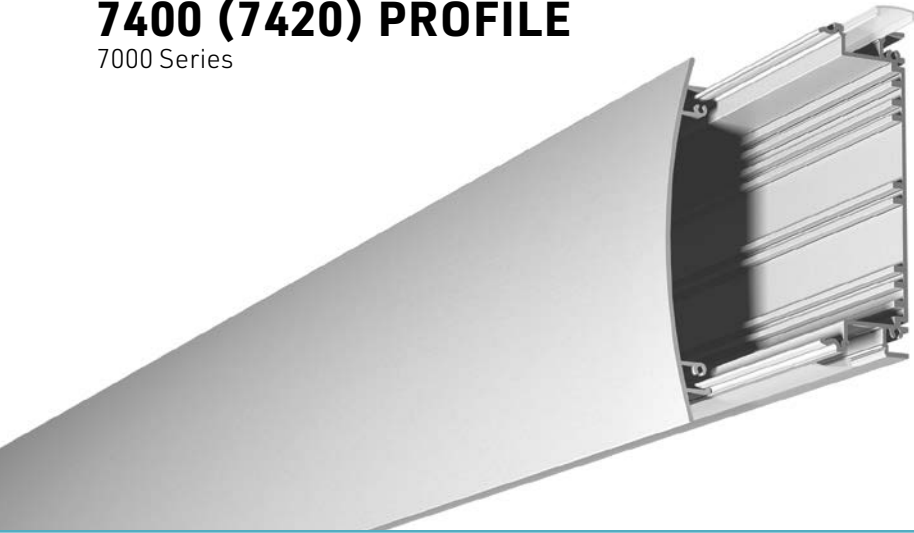

Cross-section dimensions:

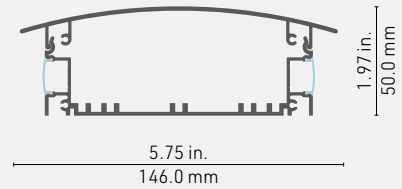

Make customized **modern wall fixtures** with our **7400 profile and the 7420 faceplate**. It accepts most LED engines and lenses of the 1000 Series, offering multiple lighting possibilities. Besides lighting the wall up and down, you could vary the light intensity and color.

FEATURES

- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less in top and bottom insert.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS


















LED ENGINE COMPATIBILITY

The top and bottom inserts are compatible with LED engines up to **14mm** wide for IP22 and up to **10mm** wide for IP68 options.












LINEAR WEIGHT

1.617 lbs/ft, 2.406 kg/m (with cover plate)



PROFILE	LENS DOWN	LENS UP	LENGTH
 7420 - Series 7400, alu	 CL - Clear lens	 CL - Clear lens	Custom length by sections of 6 to 240 inches (6m).
	 SP - Spread lens	 SP - Spread lens	
	 OX - Optiflex lens	 OX - Optiflex lens	
	 OP - Opal lens	 OP - Opal lens	
	 PR - Prime lens	 PR - Prime lens	
	 FO - Focus lens	 FO - Focus lens	
	 NO - No lens	 NO - No lens	
7420			<p>*NOTES</p> <ul style="list-style-type: none"> - By default CNC-machined junction box openings are made to match standard octagonal junction box in the center of the backplate of the aluminum profile. For custom options, please contact your local representative. - Drivers are remote
PROFILE	LENS DOWN	LENS UP	LENGTH


7000

COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	LEAD IN/OUT	USAGE	POWERSUPPLY/CONTROL**	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW  NO - No up light (w/ opal lens) 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI NO - No up light (w/ opal lens) <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location O - IP68 wet/damp location <p>Note: WarmDim is only available in IP22.</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC*** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96V - 24V Driver</p>
CCT DOWN CCT UP	LM DOWN LM UP	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	




7400 (7450) PROFILE

7000 Series

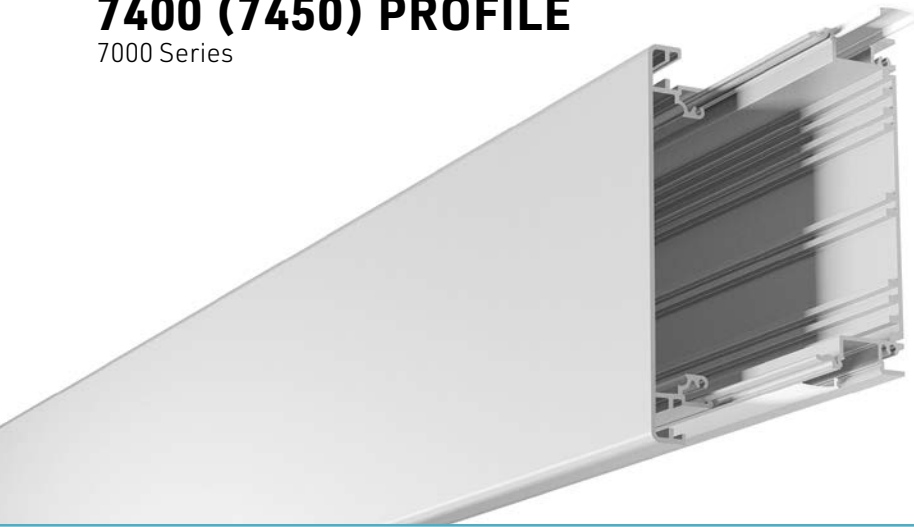

Cross-section dimensions:

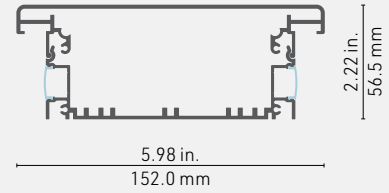

From **flat wall fixtures** to **one-of-a-kind signage**, the 7400 profile with the 7450 faceplate can do it all. The 7400 base accepts most LED engines and lenses of the 1000 Series. The faceplate can be CNC- machined and backlit through an acrylic screen for effective designer signage. Go up to 20 feet long, and finish as desired.

FEATURES

- Designed to create custom lit nameplates / logo signs.
- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less in top and bottom insert.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS


















LED ENGINE COMPATIBILITY

The top and bottom inserts are compatible with LED engines up to **14mm** wide for IP22 and up to **10mm** wide for IP68 options.

LINEAR WEIGHT

1.949 lbs/ft, 2.901 kg/m (with cover plate)














PROFILE	LENS DOWN	LENS UP	LENGTH
 7450 - profile, alu	 CL - Clear lens	 CL - Clear lens	Custom length by sections of 6 to 240 inches (6m).
	 SP - Spread lens	 SP - Spread lens	
	 OX - Optiflex lens	 OX - Optiflex lens	
	 OP - Opal lens	 OP - Opal lens	
	 PR - Prime lens	 PR - Prime lens	
	 FO - Focus lens	 FO - Focus lens	
	 NO - No lens	 NO - No lens	
7450			
PROFILE	LENS DOWN	LENS UP	LENGTH

***NOTES**

- By default CNC-machined junction box openings are made to match standard octagonal junction box in the center of the backplate of the aluminum profile. For custom options, please contact your local representative.
- Drivers are remote
- To carve your logo on the front cover of the profile, please contact your local representative and submit the logo image in vector format to: support@lumentruss.com

7000

COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	LEAD IN/OUT	USAGE	POWERSUPPLY/CONTROL**	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW  NO - No up light (w/ opal lens) 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI NO - No up light (w/ opal lens) <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location O - IP68 wet/damp location <p>Note: WarmDim is only available in IP22.</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC*** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<ul style="list-style-type: none"> * The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative. *** Only available in 96W - 24V Driver
CCT DOWN CCT UP	LM DOWN LM UP	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	




7500 PROFILE

7000 Series



Cross-section dimensions:



This 7500 series has direct, indirect or combined lighting options. Combining style and **elegance in a beautiful round format**, the 7500 profile is designed to be a suspended fixture with different and independent lumen package for both lighting options to achieve a wide variety of looks and lighting effects. This charming light fixture, is perfect for your project in either residential or commercial applications.

FEATURES

- Customizable lengths by sections from 2 to 240 inches (6m).
- Designed to give a uniform light without hot spots with a prime lens.
- Large variety of optics allows for greater creativity.
- 2 different suspension options; fixed and pivoting.
- Made of ALCOA 6063 T-5 aluminum alloy increasing heat dissipation.
- Increases the practical life of your LEDs with better heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS





















LED ENGINE COMPATIBILITY

Compatible with LED engines up to **12mm** wide.

LINEAR WEIGHT

0.433 lbs/ft, 0.644 kg/m (without lens)



PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>7500 - 7500 Profile, alu</p>	 <p>OX - Optiflex lens</p>	 <p>CL - Clear lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 2 to 96"</p> <p>Swivel maximum length = 72"</p>
 <p>7501 - 7500 Profile, black</p>	 <p>PR - Prime lens</p>	 <p>SP - Spread lens</p>	 <p>Suspension swivel kit with 15ft. aircraft cable</p> <p>SWRD - Red loop SWPK - Pink loop SWCY - Cyan loop SWBK - Black loop SWBL - Blue loop SWWH - White loop SWGR - Green loop SWTR - Transparent loop SWOR - Orange loop</p>	 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
 <p>7502 - 7500 Profile, white</p>	 <p>NO - No lens</p>	 <p>OX - Optiflex lens</p>		 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>	
 <p>750X - 7500 Profile, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <p>RAL NUMBER</p>	 <p>NO - No lens</p>	 <p>OP - Opal lens</p>		 <p>NO - No canopy</p>	
PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH

COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	POWER CABLE FINISH	USAGE	POWERSUPPLY/CONTROL**	*NOTES	
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p> <p>WD - WarmDim</p> <p>RGB - RGB</p> <p>RGBW - RGBW</p> <p>NO - No up light (w/ opal lens)</p>	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>NO - No up light (w/ opal lens)</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>BK - Black</p> <p>WH - White</p> <p>RD - Red</p> <p>BC - Black/White Chevron</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96W - 24V Driver</p>	
CCT DOWN	CCT UP	LM DOWN	LM UP	POWER CABLE FINISH	USAGE	POWER SUPPLY/CONTROL


IP22

TITLE 24


7650 PROFILE (TUBE)

HORIZONTAL SUSPENSION / WALL MOUNT

7000 Series

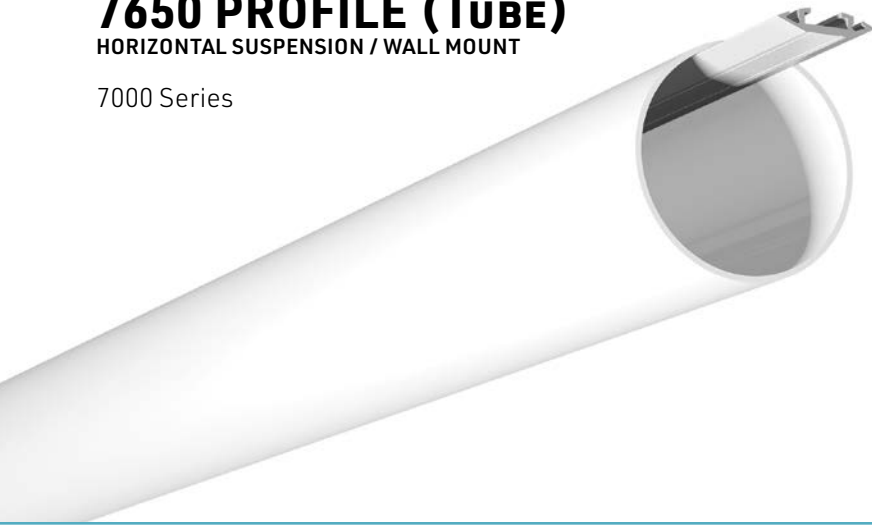

Cross-section dimensions:



THE BEAUTY OF 315 ° LIGHTING

Modern design, this beautiful opal acrylic tube multiplies the possibilities of lighting. An innovative three-sided radiator diffuses light at 315° and can accommodate 2 or 3 light sources. The wide choice of color temperatures and light intensities make it an ultra-versatile luminaire when it comes to determining the intensity and color of the light. With a 3-inch diameter, the 7650 provides uniform linear illumination without dots or halos.

FEATURES

- **Surface Installation:** Can be installed horizontally with 2 stylish canopies or vertically with a stylish canopy, and an electrical junction box. Given the lightness of the tube, the facades of the stylish canopy can be mounted in three positions: top, center and bottom.
- **Horizontal Hanging Installation:** Create striking lighting effects by varying angles or arranging tubes asymmetrically. Choice of 3 standard light sources and 3 24V high power light sources on one, two or three radiator trays providing 6 light intensity options.
- Custom length by sections of 6 to 144 inches (3.6m).
- Accepts 3 LED engines on the heatsink insert
- Designed to give a uniform light without hot spots.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

All three surfaces of the heatsink insert are compatible with LED engines up to **10mm** wide for IP22 and up to **8mm** wide for IP68 options.

LINEAR WEIGHT

0.529 lbs/ft, 0.787 kg/m (acrylic tube with aluminum heatsink insert only)



ACRYLIC DIFFUSER



7650 - Acrylic diffuser tube

HEATSINK INSERT



1900 - Edge heatsink

MOUNTING HARDWARE



SUSH - Horz. susp. kit, Alu (Type B single channel) w/15ft. aircraft cable

MC - Mural canopy, alu

CANOPY

NOTE: Only available with **SUS** bracket (suspension)



Remote driver canopy plate
See Appendix 2 on page 158
CR0 - Alu
CR1 - Black
CR2 - White



Integrated driver in canopy
See Appendix 2 on page 158
CI0 - Alu
CI1 - Black
CI2 - White




Integrated driver & suspension kit
See Appendix 2 on page 158
CIK0 - Alu
CIK1 - Black
CIK2 - White
















NO - No canopy

LENGTH

Custom length by sections of 6 to 144 inches (3.6 m).



COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	POWER CABLE FINISH	USAGE*	POWER SUPPLY/CONTROL
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  RGB - RGB  RGBW - RGBW	2LP1 - 320 LM / 3.0W FT / 90+CRI 2LP3 - 616 LM / 9.0W FT / 90+CRI 3LP2 - 765 LM / 9.0W FT / 90+CRI 3LP3 - 924 LM / 13.5W FT / 90+CRI 2LHP - 1400 LM / 14.0W FT / 95+CRI 3LHP - 2100 LM / 21.0W FT / 95+CRI Note: Not applicable for WarmDim & RGB color temperatures	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 FT NO - No lead	 BK - Black  WH - White  RD - Red  BC - Black/White Chevron	I - IP22 indoor dry location 0 - IP68 wet/damp location Note: 3LHP3, 3RGB & 3RGBW are only available in IP22.	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	POWER CABLE FINISH	USAGE	POWER SUPPLY/CONTROL

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver


7650 PROFILE (TUBE)

VERTICAL SUSPENSION

7000 Series



Cross-section dimensions:



THE MAGIC OF 360° LIGHTING

Modern design, this beautiful opal acrylic tube multiplies the possibilities of lighting. Its innovative four-sided radiator diffuses 360° light and can accommodate 4 light sources. The wide choice of color temperatures and light intensities make it an ultra-versatile luminaire when it comes to determining the intensity and color of the light. With a 3-inch diameter, the 7650 provides uniform linear illumination without dots or halos.

FEATURES

- Hanging installation vertically
- Custom length by sections of 6 to 144 inches (3.6m).
- Accepts 4 led engines on the heatsink insert: up to 10mm wide.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to give a uniform 360° light without hot spots.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

All four surfaces of the heatsink are compatible with LED engines up to **10mm** wide for IP22 and up to **8mm** wide for IP68 options.

LINEAR WEIGHT

0.529 lbs/ft, 0.787 kg/m (acrylic tube with aluminum heatsink insert only)



ACRYLIC DIFFUSER



7650 - Acrylic diffuser tube

HEATSINK INSERT



7604 - 4-Side heatsink

MOUNTING HARDWARE



SUSV - Vert. susp. kit, Chrome w/15ft. aircraft cable & coax wire

CANOPY

NOTE: Only available with SUS bracket (suspension)




Remote driver canopy plate
See Appendix 2 on page 158
CR0 - Alu
CR1 - Black
CR2 - White

LENGTH

Custom length by sections of 6 to 60 inches.

NOTE: When using our high voltage LED engine (4LHP), the maximum length is 48 inches.



7000

COLOR TEMPERATURE	LUMEN PACKAGE*	POWER CABLE FINISH	USAGE*	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 53 - 5300K (LHP only) 62 - 6200K (LP only) RGB - RGB RGBW - RGBW 	<ul style="list-style-type: none"> 4LP0 - 512 LM / 6.0W FT / 90+CRI 4LP1 - 640 LM / 6.0W FT / 90+CRI 4LP2 - 1020 LM / 12.0W FT / 90+CRI 4LP3 - 1232 LM / 18.0W FT / 90+CRI 4LHP - 2800 LM / 28.0W FT / 95+CRI <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> BK - Black WH - White RD - Red BC - Black/White Chevron 	<ul style="list-style-type: none"> I - IP22 indoor dry location 0 - IP68 wet/damp location <p>Note: LHP, RGB & RGBW options are only available in IP22.</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE 24 cover.jpg</p> </div>


COLOR TEMPERATURE CCT LUMEN PACKAGE POWER CABLE FINISH USAGE POWER SUPPLY/CONTROL

7800 PROFILE (POLETRUSS)

7000 Series



Cross-section dimensions:



Illuminate the inside of your closet to see your entire wardrobe! The 7800 profile is our **most robust closet pole** and offers three lighting possibilities. The rod will accept most LED engines as well as the 1000 and 4000 series lenses. You can even add a touch of woodwork in order to give it a classy appearance.

FEATURES

- Rugged construction to withstand abuse in a commercial (hotel or retail) setting.
- Compatible with the 1000 and the 4000 series lenses.
- Can be installed in length of 8 feet without additional support.
- Custom length by sections of up to 8 feet (2.44m).
- Application guide for 10mm (3/8-inch) LED engine or less in the bottom insert.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS















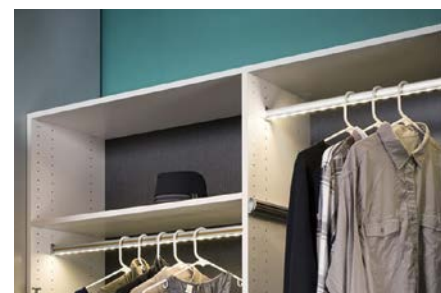



LED ENGINE COMPATIBILITY

The **bottom channel** is compatible with LED engines up to **14mm** wide for IP22 and up to **10mm** wide for IP68 options, and the **side channels** – with LED engines up to **10mm** wide for IP22 and up to **8mm** wide for IP68 options.

LINEAR WEIGHT

1.058 lbs/ft, 1.575 kg/m (without lenses)















PROFILE	LENS DOWN (1)	FRONT SIDE (2)	BACK SIDE (3)	MOUNTING HARDWARE	LENGTH
 <p>7800 - Profile, alu</p>	 <p>CL - Clear lens</p>  <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p>  <p>NO - No Lens</p>	 <p>CL - Clear lens side</p>  <p>OX - Optiflex lens side</p>  <p>OP - Opal lens side</p>  <p>NO - No lens</p>	 <p>CL - Clear lens side</p>  <p>OX - Optiflex lens side</p>  <p>OP - Opal lens side</p>  <p>NO - No lens</p>	 <p>BR0 - endcap / bracket kit, Alu</p>	<p>Custom length by sections of 6 to 96 inches (2.44m).</p>
7800				BR0	
PROFILE	BOTTOM LENS (1)	FRONT SIDE (2)	BACK SIDE (3)	MOUNTING HARDWARE	LENGTH

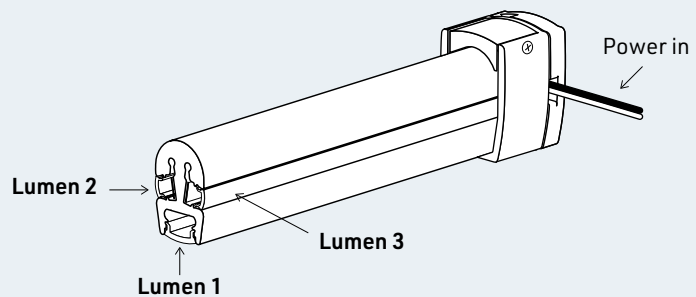***NOTES**

By default lenses are the same length as aluminum profile. Customer will need to cut the bottom lens to accommodate the ceiling support (BR2) if required.

*NOTE: Follow this diagram when selecting the Lumen Package.
No side strip = Opal lens




COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW  NO - No side light (w/ opal lens) 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI NO - No side light (w/ opal lens) <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> 1 - IP22 indoor dry location 0 - IP68 wet/damp location <p>Note: WarmDim is only available in IP22. LHP, RGB & RGBW options for the sides are only available in IP22.</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 5px; width: fit-content;"> <p>TITLE 24</p> </div>
CCT1 CCT2 CCT3	LM1 LM2 LM3	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

7850 PROFILE

7000 Series



Cross-section dimensions:



The 7850 is a **direct replacement of standard closet rods, and even curtain rods**. Whether you need to light your way through the morning wardrobe, or turn your sheer curtains into a privacy screen at night, this profile will do the job. This profile can even be used to replace your shower curtain rod when installed with IP68 graded LED engine and power supply suitable for wet locations.

FEATURES

- Standard diameter for wardrobe rods, compatible with a wide range of hardware on the market.
- Compatible with the 1000 Series lenses.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY




















IP22: Compatible with LED engines up to **14mm** wide.












IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.442 lbs/ft, 0.658 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	SUPPORT	MOTION SENSORS*	LENGTH
 <p>7850 - Profile, Alu</p>	 <p>CL - Clear lens</p>	 <p>BR1 - Heavy duty Closet Rod bracket kit</p>	 <p>BR2 - Ceiling support (should be ordererd at every 48")</p>	 <p>SEN1 - 30 sec. Embedded</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
 <p>7853 - Profile, Champagne</p>	 <p>SP - Spread lens</p>	 <p>BR3 - Screwless finish hangers</p>	 <p>NO - No support</p>	 <p>SEN2 - 30 sec. Outside extrusion</p>	
	 <p>OX - Optiflex lens</p>	 <p>EC0 - Standard endcaps, Alu.</p>		 <p>SEN3 - 4 min. Embedded</p>	
	 <p>OP - Opal lens</p>	 <p>NO - No mounting hardware</p>		 <p>SEN4 - 4 min. Outside extrusion</p>	
	 <p>PR - Prime lens</p>			 <p>NO - No sensor</p>	
	 <p>NO - No lens</p>			<p>*NOTES</p> <p>All motion sensors: Max 36W/12V or 72W/24V</p>	
PROFILE	LENS	MOUNTING HARDWARE	SUPPORT QTY (every 48")	MOTION SENSOR	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location</p> <p>Note: WarmDim is only available in IP22.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	



8000 SERIES






8500 PROFILE - REGULAR LED ENGINE

8000 Series



Cross-section dimensions:

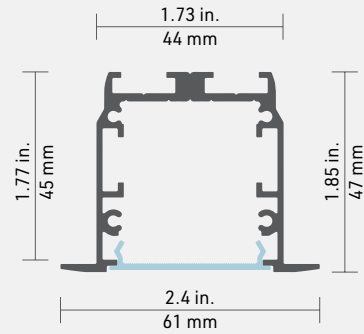

The ultimate in simplified LED lighting! The 8500 recessed profile is designed for use with standard and HOS LED engines. With its elegant and discreet edges, the 8500 fits perfectly and requires no plastering. Its ingenious design includes Type B grooves that allow the use of flat and 45°/135° joiners, ideal for angled fittings. **It is a masterpiece in terms of ease of installation, luminous intensity and creative set-up.**

FEATURES

- Alu finish (white and black available on special order).
- Available in 8-foot (2.4 m) lengths.
- Prime lens: superior quality optics designed with LumenTruss's exclusive dot-free technology.
- 5 color temperatures (2400 K to 4200 K).
- Driverless, just plug in the LED engine.
- PVC reflector for maximum luminance and light loss-free illumination.
- Spring brackets simplify installation and securely hold the extrusion in the opening.
- Optional DIY overmoulding kit available.
- Designed to meet North American woodworking standards.

OPTIONS









LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.

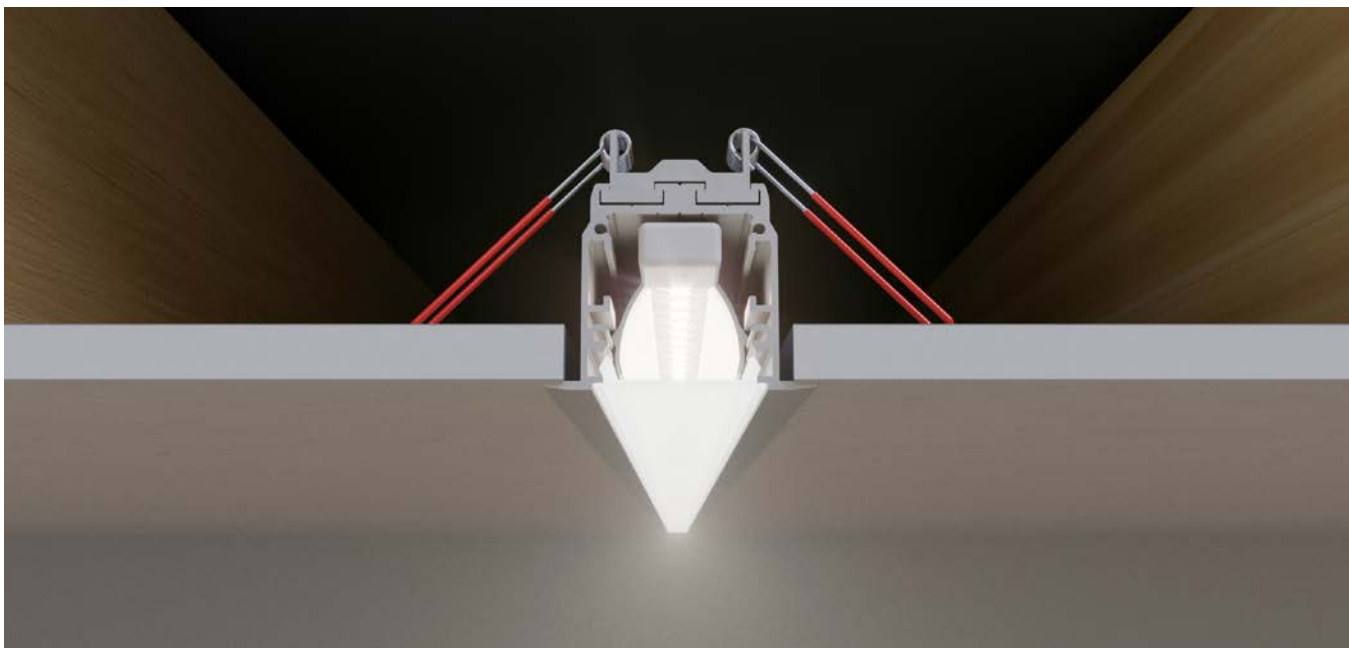









LINEAR WEIGHT

0.73 lbs/ft, 1.084 kg/m (without lens)




PROFILE	LENSES	MOUNTING HARDWARE	OPTION	LENGTH
 8500 - Profile, Alu	 PR - Prime flat lens	 SP - Spring bracket	 HER - High efficiency reflector	Custom length by sections of 6 to 240 inches (6m).
	 OX - Optiflex flat lens	 NO - No mounting hardware	 NO - No option	
	 OXC - Optiflex concave lens			
	 NO - No Lenses			
8500				
PROFILE	LENS	MOUNTING HARDWARE	OPTION	LENGTH

8000


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>cover.jpg</p> </div>
IP22					
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

8500 PROFILE - LUXLINE 120V

8000 Series

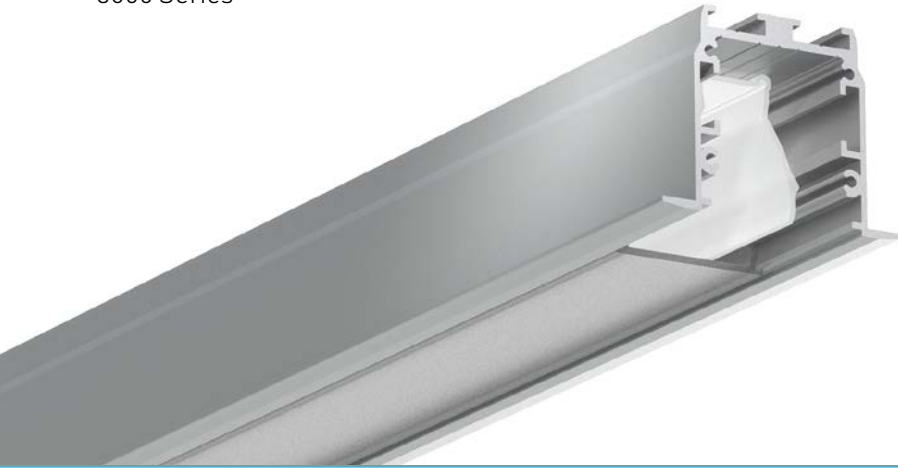

Cross-section dimensions:

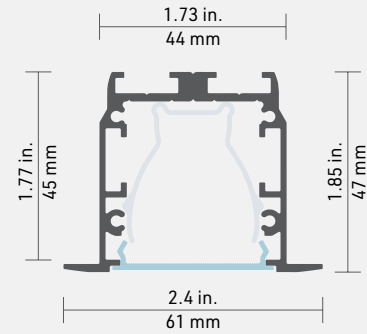

The ultimate in simplified LED lighting! The 8500 recessed profile is **designed for use with the LuxLine 120 V LED engine**, available in 164 foot rolls, which allows you to create uniform lighting to suit the length of your project. With its elegant and discreet edges, the 8500 fits perfectly and requires no plastering. Its ingenious design includes Type B grooves that allow the use of flat and 45°/135° joiners, ideal for angled fittings. It is a masterpiece in terms of ease of installation, connection and creative set-up.

FEATURES

- Alu finish (white and black available on special order).
- Available in 8-foot (2.4 m) lengths.
- Prime lens: superior quality optics designed with LumenTruss's exclusive dot-free technology.
- 5 color temperatures (2400 K to 4200 K).
- Driverless, just plug in the LED engine.
- PVC reflector for maximum luminance and light loss-free illumination.
- Spring brackets simplify installation and securely hold the extrusion in the opening.
- Optional DIY overmoulding kit available.
- Designed to meet North American woodworking standards.

OPTIONS










LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.

LINEAR WEIGHT

0.73 lbs/ft, 1.084 kg/m (without lens)




PROFILE	LENSES	MOUNTING HARDWARE	OPTION	LENGTH
 <p>8500 - Profile, Alu</p>	 <p>PR - Prime flat lens</p> <p> NO - No Lenses</p>	 <p>SP - Spring bracket</p> <p> NO - No mounting hardware</p>	 <p>HER - High efficiency reflector</p> <p> NO - No option</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
<div style="border: 1px solid black; padding: 2px; display: inline-block;">8500</div>				
PROFILE	LENS	MOUNTING HARDWARE	OPTION	LENGTH

8000

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	JUMPER	USAGE	*NOTES
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 62 - 6200K 	<p>LUX - 350 LM / 4.0W FT / 90+CRI</p>	<p>PG - Plug-in 47"</p> <p>HW - Hardwire 118"</p>	<p>JP6 - Jumper 6"</p> <p>JP12 - Jumper 12"</p> <p>NO - No jumper</p>	<p>2 - IP65 indoor</p>	<p>The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <div style="border: 1px solid gray; padding: 2px; display: inline-block; text-align: center;"> <p>TITLE 24 <small>lumens/foot</small></p> </div>
<div style="border: 1px solid black; padding: 2px; display: inline-block;">LUX</div>				<div style="border: 1px solid black; padding: 2px; display: inline-block;">IP65</div>	
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	JUMPER QTY		

- ### LUXLINE FEATURES
- LumenTruss Driverless technology.
 - Direct line voltage.
 - Constant current IC providing uniform intensity over the entire run.
 - Uses North American power plug with built-in fuse or hardwire.
 - Order in lengths of 1 FT.
 - 164 FT maximum run.
 - Ultra high lumen output.
 - Architectural grade.
 - PVC coating (not recommended for direct sunlight).
 - 3 year warranty.
 - Life of 50,000 hours
 - LED type: 3056
 - WARNING: Do not cut AC plug.

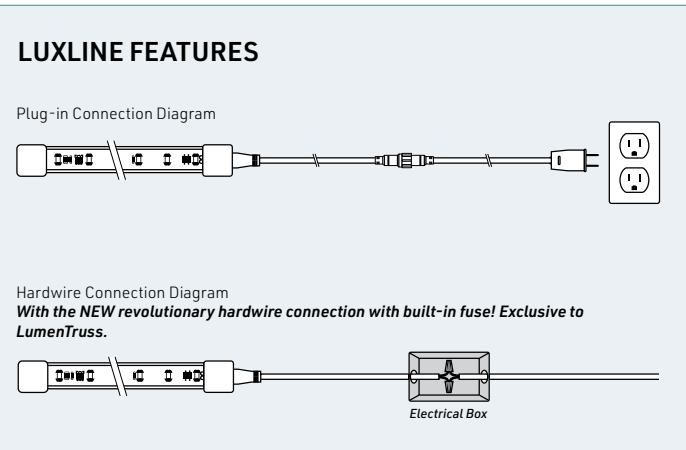


8800 PROFILE

8000 Series



Cross-section dimensions:



This new profile design will offer you a wide choice of optics, thanks to the development of various lens that will allow you to customize the light projection angle. In addition, its unique hardware will allow you to adjust the direction of your fixture to your needs, even after installation is complete.

FEATURES

- Hardware specially developed to allow you to rotate the luminaire and guide the light source according to the circumstances.
- Can be used with a concave diffuser designed to hide the light source while maintaining the profile to the foreground.
- The combination of various lenses will offer a lighting distribution customized to your needs.
- Straight and clean lines will give a modern look to your decor.
- Optics available: flat, concave diffuser & anti glare.
- Designed to meet North American woodworking standards.

OPTIONS






















LED ENGINE COMPATIBILITY












Compatible with LED engines and PCBs up to **33mm** wide.

WEIGHT

0.563 lbs/ft, 0.8378 kg/m, without lenses.



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 <p>8800 - Profile, Alu</p>  <p>8801 - Profile, Black</p>  <p>8802 - Profile, White</p>  <p>8802 - Profile, White</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-top: 5px;"></div> <p>RAL NUMBER</p>	<p>PR - Prime flat lens</p>  <p>OX - Optiflex flat lens</p>  <p>OXC - Optiflex concave lens</p>  <p>NO - No Lenses</p> 	<p>SW - Swivel bracket kit</p>  <p>Type B dbl. chann. susp. kit with 15ft. aircraft cable</p> <p>9480 - Alu 9491 - Black 9482 - White</p>  <p>Loop swivel bracket</p> <p>SWRD - Red SWPK - Pink SWCY - Cyan SWBK - Black SWBL - Blue SWWH - White SWGR - Green SWTR - Transparent SWOR - Orange</p>  <p>NO - No mounting hardware</p> 	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>  <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>  <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>  <p>NO - No canopy</p> 	<p>HER - High efficiency reflector</p>  <p>NO - No option</p> 	<p>Custom length by sections of 2 to 240"</p> <p>Swivel maximum length = 96"</p>
PROFILE	LENS	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not required for Warmdim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>SUS - Coaxial wire 15 FT</p> <p>NO - No lead</p>	<p>1 - IP22 indoor dry location</p> <p>0 - IP68 wet/damp location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

8860 PROFILE

8000 Series



Cross-section dimensions:

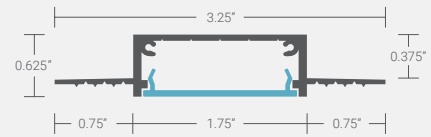

With a direct fit for standard 5/8" and 1/2" gypsum panels, the 8860 profile makes it easy to install recessed linear LED lights on ceilings or walls, in a few simple steps, creating a nice and smooth effect. Can be use with standard drywalls with no need to change the structure under the panels. The light source will seem to merge with the surface which creates a refine look that will work well with any design!

FEATURES

- A direct fit for standard 5/8" and 1/2" gypsum panels.
- The grooves found on the flaps help reduce the gap between the screws and the surface.
- The LED channels allows the installation of two double strip tape (19.2w) side by side, for maximum lighting power.
- Available in precut sections of 96 inches (2.4 m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS







LED ENGINE COMPATIBILITY

Compatible with LED engines up to **30mm** wide in total for direct light options and up to **5mm** wide on either side for edge light options.

LINEAR WEIGHT

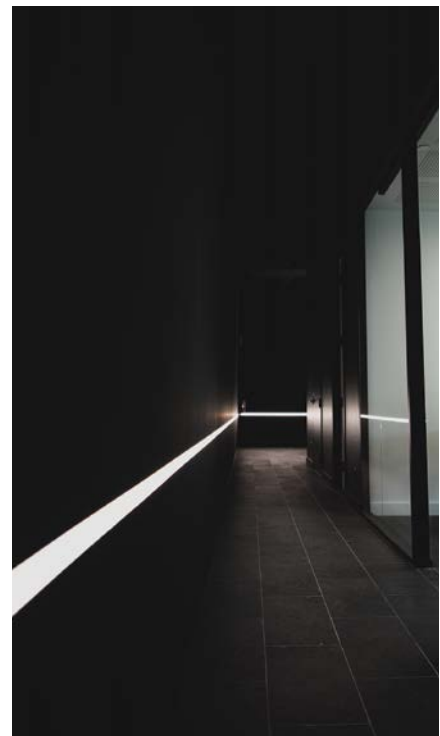0.380 lbs/ft, 0.5656 kg/m, without lenses.



PROFILE	LENGTH	LENSES	PVC PROTECTOR
 <p>8860 - Profile</p>	<p>Available in straight section of 8 feet (96 inches/2.4 m).</p>	 <p>PR - prime lens</p>	 <p>PVC - Pvc protector</p>
QUANTITY	<p>x 96 INCHES</p> <p>LENGTH</p>	<p>INCLUDED</p> <p>WITH EACH PROFILE</p>	<p>INCLUDED</p> <p>WITH EACH PROFILE</p>


ENCAPS













8860 Endcaps

QUANTITY

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.









DIRECT LIGHTING OPTION (one LED engine)

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LP only)  62 - 6200K (LHP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX (RGB only)</p> <p>NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY / CONTROL	LED ENGINE LENGTH




DOT-FREE EDGE LIGHTING OPTION (two LED engines)

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	LENGTH
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K 	<p>2LP3 - 308 LM / 4.5W FT / 90+CRI</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH


*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

8900 PROFILE (KNIFE EDGE)

8000 Series

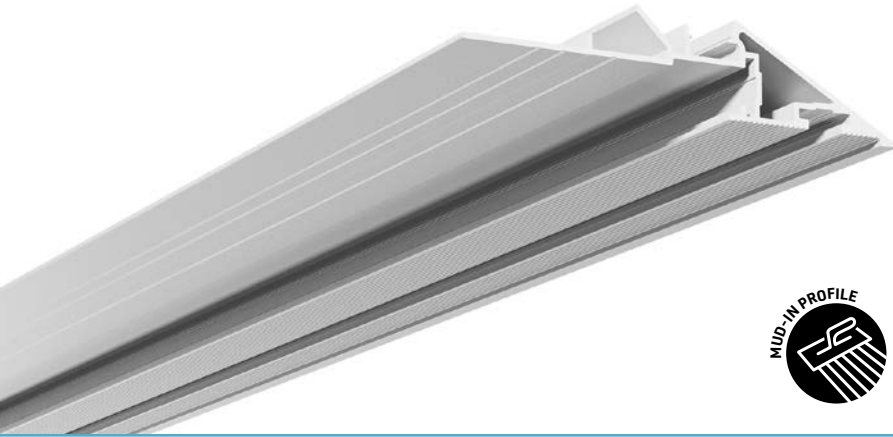

Cross-section dimensions:

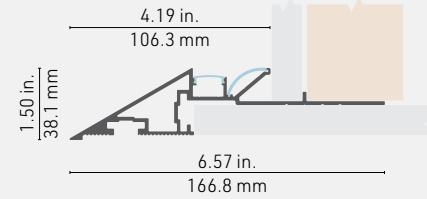

The 8900 "Knife Edge" profile makes the construction of **edgeless coves and drop ceiling soffits** a breeze. Its direct fit for standard gypsum panels allows for a seamless finish. Two integrated LED channels allow you to **add contour lighting, fill space with light, or both**. Build rectangular shapes using pre-built corners and straight line extrusions, tune the light with your choice of LED engines, paint to match, and you're done!

FEATURES

- A direct fit for standard 5/8" gypsum panels, will also accommodate 1/2" panels with the installation of 1/8" shims onsite.
- The grooved area allows to level the profile to the plasterboard using drywall mud.
- Two different LED channels, a 90 degrees to focus the light in the cove, a 40 degrees to wash of the ceiling, use both for a maximum indirect lighting.
- The LED channels are designed for up to 14mm wide LED light engine. Are to be ordered to desired lengths for easier installation.
- Ordered in length of 96 inches (2.43m), cuttable on site for easy and precise installation.
- Available for easier installation, 2 types of pre-made corners, inside corner (8901) lighting on 90 degree, and outside corner (8902) lighting on 270 degree.
- Each 96" inch section and corners includes both series 1000 Standard (1261) and 2000 round Optiflex (2034) lenses and 2 type C straight joiners (see accessories for additional joiners).
- Made of ALCOA 6063-T5 aluminum alloy for increased heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

Both LED channels are compatible with LED engines up to **14mm** wide.





LINEAR WEIGHT

1.288 lbs/ft, 1.916 kg/m, without lenses.



8900 Profile (KNIFE EDGE) ordering sheet



8000 Series

PROFILE	LENGTH	90° UP LENS	40° SIDE LENS	ACCESSORIES
 8900 - Profile	Available in straight section of 8 feet (96 inches/2.4 m).	 OX - Optiflex lens	 OXR - Optiflex lens, round	 JS - Type C straight joiner
QUANTITY	X 96 INCHES LENGTH	INCLUDED WITH EACH PROFILE	INCLUDED WITH EACH PROFILE	INCLUDED X2 WITH EACH PROFILE

EXTRA ACCESSORIES

 JS - Type C straight joiner	 JH45 - Type C horiz. 45° joiner	 JH90 - Type C horiz. 90° joiner	 JV90 - Type C vert. 90° joiner	 JV45 - Type C vert. 45° joiner
QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY











PRE-MADE CORNERS

 I90 - Inside corner 90°	 O270 - Outside corner 270°	 I45 - Inside corner 45°	 O45 - Outside corner 45°
QUANTITY	QUANTITY	QUANTITY	QUANTITY


LENS + ACCESSORIES

90° UP LENS OX - Optiflex lens
40° SIDE LENS OXR - Optiflex lens, round
ACCESSORIES JS - Type C straight joiner
INCLUDED WITH EACH CORNER

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	LENGTH
 24 - 2400K	LP0 - 128 LM / 1.5W FT / 90+CRI	HW3 - Hardwire 3 FT	I - IP22 indoor dry location	A - Non-dimming	Total length of LED engine in inches - See Appendix 3 on how to calculate length.
 27 - 2700K	LP1 - 160 LM / 1.5W FT / 90+CRI	HW6 - Hardwire 6 FT		B - ELV dimming 120V AC	
 30 - 3000K	LP2 - 255 LM / 3.0W FT / 90+CRI	HW9 - Hardwire 9 FT		C - ELV dimming 120/277V AC**	
 35 - 3500K	LP3 - 308 LM / 4.5W FT / 90+CRI	HWX - Hardwire custom FT		D - 0/10V dimming 120/277V AC	
 42 - 4200K	LHP - 700 LM / 7.0W FT / 95+CRI	DC3 - DC plug 3 FT		E - Non-dimming DC plug in	
 53 - 5300K (LHP only)	Note: Not applicable for WarmDim & RGB color temperatures	DC6 - DC plug 6 FT		F - DMX	
 62 - 6200K (LP only)		DC9 - DC plug 9 FT		NO - No driver	
 WD - WarmDim		DCX - DC plug custom FT			
 RGB - RGB		NO - No lead			
 RGBW - RGBW					
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

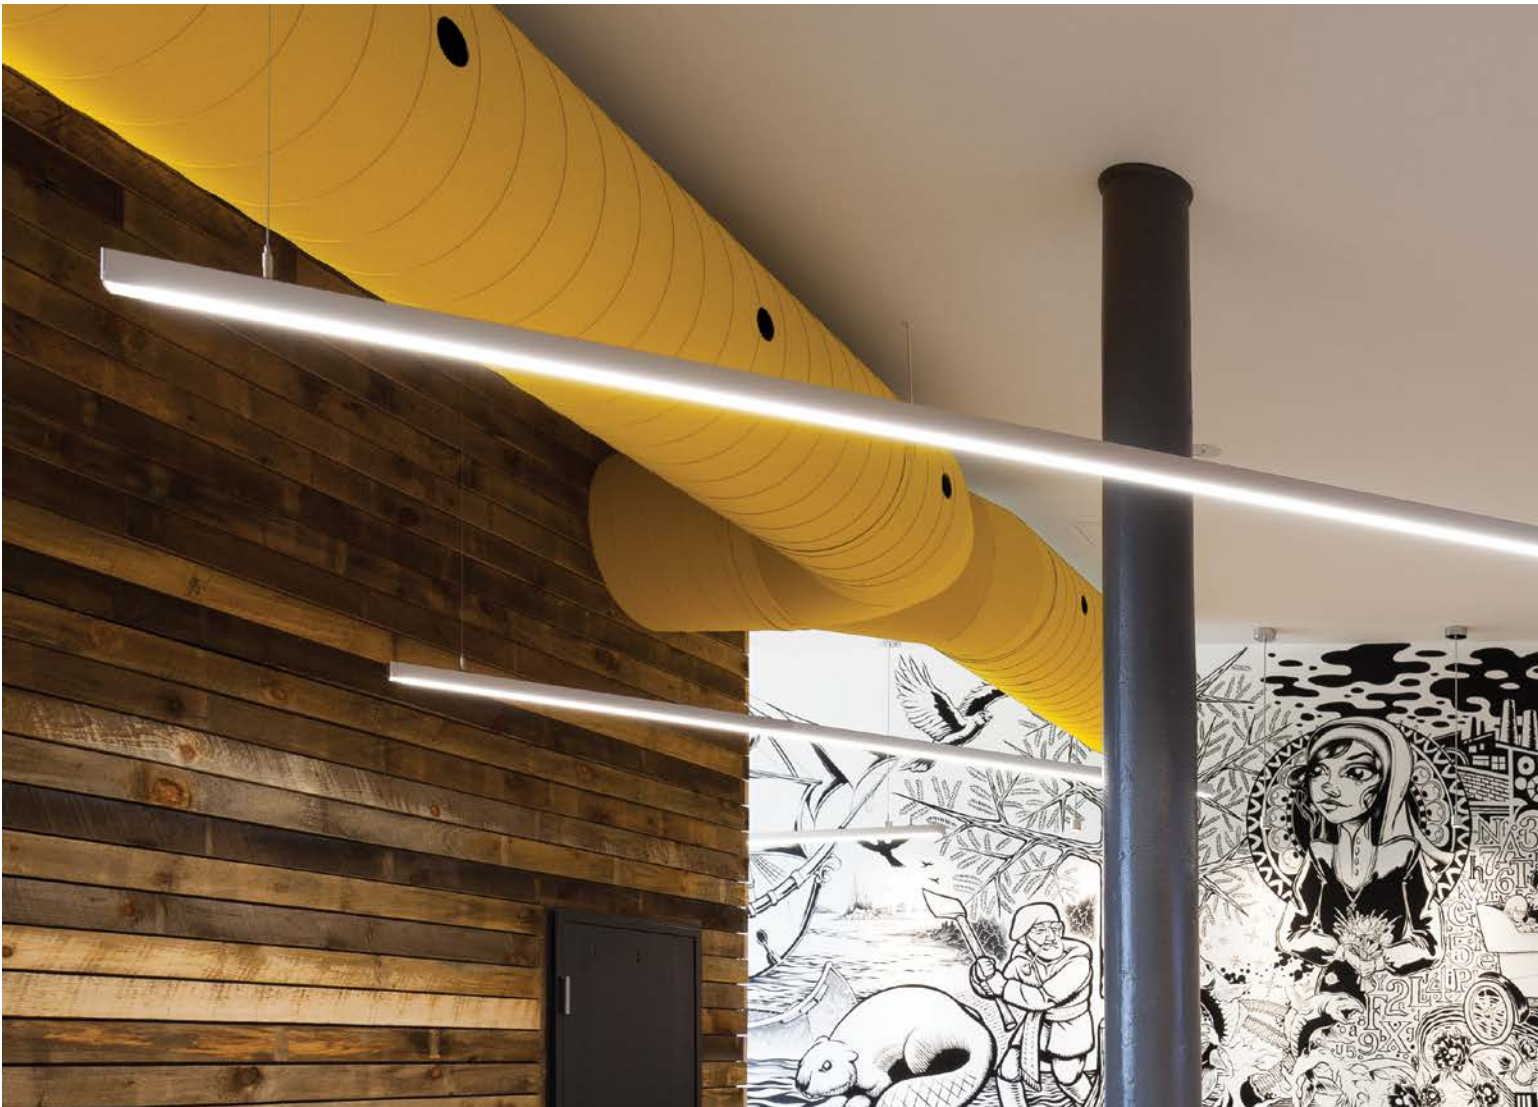

9000 SERIES






9400 PROFILE

9000 Series



Cross-section dimensions:



The **9400 profile** with its twin mounting channels allows for a **wide range of installation options**. Whether on swivel arms, on a surface, or suspended, it can be built in complex spatial configurations using **corner joiners**. Its rugged build in 6063-T5 aluminum alloy will withstand abuse in demanding applications and extreme weather, all of it with an understated elegance.

FEATURES

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heatsink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has 3 application guides for 10mm (3/8-inch) wide LED engines.
- Designed to give a uniform light without hot spots.
- Its mounting channels make it compatible with a wide range of installation accessories.

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines and PCBs up to **33mm** wide.





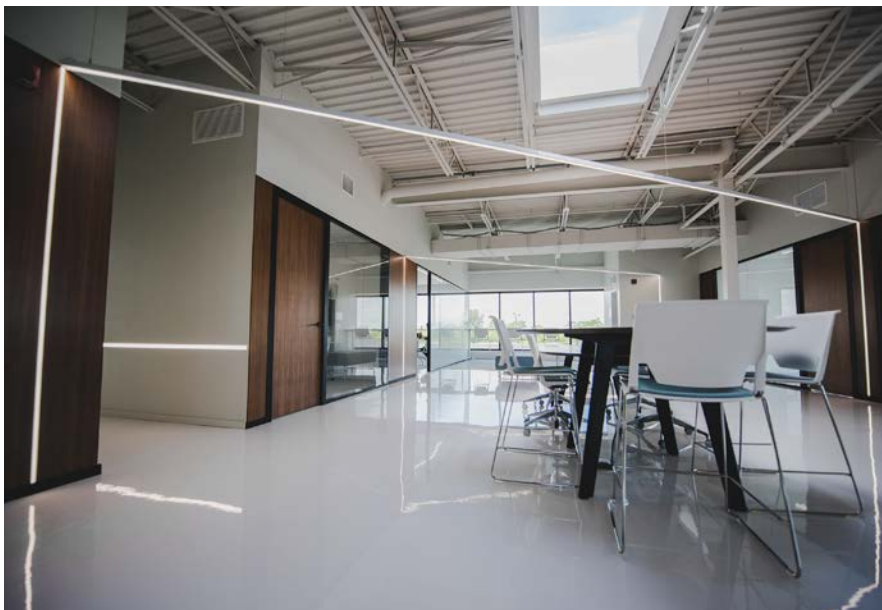



















LINEAR WEIGHT











0.697 lbs/ft, 1.038 kg/m (without lens or insert)



9400 Profile ordering sheet

9000 Series

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 <p>9400 - Profile, Alu</p>	 <p>CL - Clear lens</p>	 <p>CLIP - Clip-in Bracket</p>	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	 <p>HER - High efficiency reflector</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
 <p>9401 - Profile, Black</p>	 <p>OX - Optiflex lens</p>	 <p>Surface 2-side bracket S20 - Alu S21 - Black S22 - White</p>	 <p>Integrated driver in canopy See Appendix 2 on page 158 C10 - Alu C11 - Black C12 - White</p>	 <p>NO - No option</p>	
 <p>9402 - Profile, White</p>	 <p>OP - Opal Lens</p>	 <p>Surface 1-side bracket S10 - Alu S11 - Black S12 - White</p>	 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>		
 <p>940X - 9400 Profile, custom color</p> <p>IMPORTANT: Give RAL color № See Appendix 1 on page 158</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin: 5px 0;"></div> <p>RAL NUMBER</p>	 <p>PR - Prime Lens</p>	 <p>Swivel wall bracket SW0 - Alu SW1 - Black SW2 - White</p>	 <p>NO - No canopy</p>		
	 <p>FO - Focus lens</p>	 <p>Swivel sign arm, 6° offset SA60 - Alu SA61 - Black SA62 - White</p>			
	 <p>NO - No lens</p>	 <p>Swivel sign arm, 18° offset SA180 - Alu SA181 - Black SA182 - White</p>			
		 <p>Type B dbl, chann. susp. kit with 15ft. aircraft cable SUS0 - Alu SUS1 - Black SUS2 - White</p>	 <p>NO - No mounting hardware</p>		
PROFILE	LENS	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>SUS - Coaxial wire 15 FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE</p> <p>24</p> <p>comp.jpg</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

9850 PROFILE

9000 Series



Cross-section dimensions:



The 9850 is a 9000 series linear luminaire system designed to be suspended. Minimalist style, it is robust and powerful. Multiple standard LED light sources can be installed up to 36 mm wide for maximum power. It is equipped with an Optiflex lens that diffuses the light evenly, without dots, in a beam of 180 degrees. A tool-free, exclusive assembly eliminates hardware clutter for a clean look.

FEATURES

- 3 inches wide by 4 inches high.
- Custom length by sections of 2 to 240 inches.
- Made of ALCOA 6063-T5 aluminum alloy for superior heat dissipation and LED longevity.
- The Optiflex (frosted) lens, combined with the distance from the LED source to the lens, allows for a dot-free light appearance.
- Tool-free mounting kit with rubber tabs and magnetic bits, exclusive to LumenTruss™
- The suspension cables can be installed anywhere on the top of the luminaire for greater flexibility of installation.

OPTIONS




LED ENGINE COMPATIBILITY







Multiple standard LED engines can be installed up to a total width of **36mm**.

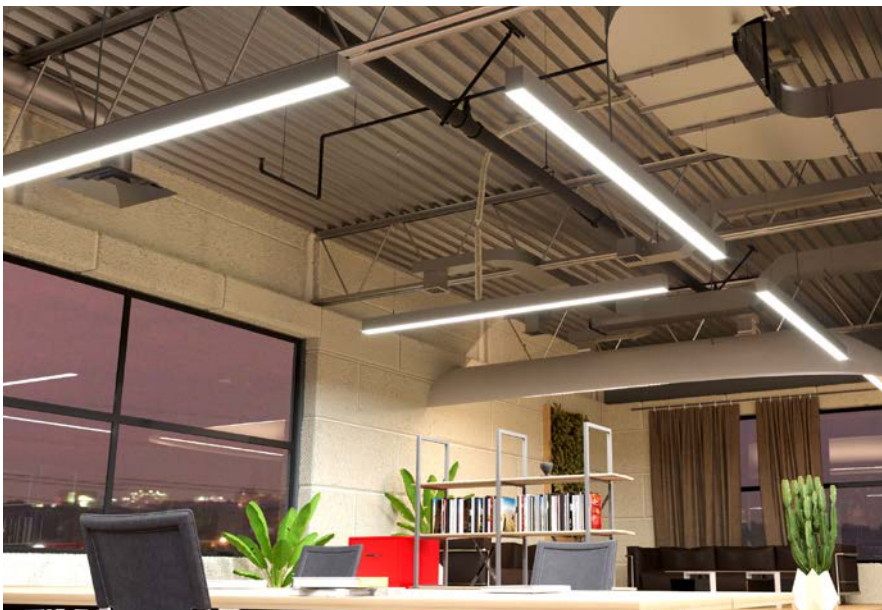LINEAR WEIGHT











2.863 lbs/ft, 4.261 kg/m

Figures provided for the aluminum profiles only – outer and inner enclosures, heatsink. The complete assembly, with LED light sources, reflectors, power supplies, endcaps, mounting hardware etc. will be greater, and will vary depending on product configuration.



PROFILE ASSEMBLY	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>9850 - Down profile assembly, Alu</p>	 <p>Suspension kit with 15ft. aircraft cable SUS0 - Stainless SUS1 - Black</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	Custom length by sections of 2 to 240 inches.
		 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
		 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>	
		 <p>NO - No canopy</p>	
PROFILE ASSEMBLY	MOUNTING HARDWARE	CANOPY	LENGTH

9000

COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<ul style="list-style-type: none"> I - IP22 indoor dry location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> TITLE 24 <small>comp.jpg</small> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	IP22	POWER SUPPLY/CONTROL	



WOOD SERIES






TIGA

Wood Series



Cross-section dimensions:




Go for the warmth of the **natural essence of wood**. Liven up your spaces with our ecological lighting fixtures made of recycled wood from Quebec. The slim **TIGA** will match any décor with its smoothed out sides, and can be combined with a linear canopy for extra style.

FEATURES

- Engineered from sustainably harvested and recycled hardwood, for superior mechanical quality and to bring out the natural wood texture.
- Designed to give a uniform light without hot spots with an optiflex, opal or prime lens.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Available in natural or oiled finishes, or in custom wood essences and tints.

OPTIONS


















LED ENGINE COMPATIBILITY













Compatible with LED engines or PCBs up to **14mm** wide.

LINEAR WEIGHT

1.141 lbs/ft, 1.699 kg/m (without lens or insert)



PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>TIGO - Wood enclosure, Oiled finish Alu heatsink included with profile</p>	 <p>CL - Clear lens</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>
 <p>TIGN - Wood enclosure, Natural finish Alu heatsink included with profile <i>NOTE: Special order, additional charges will be applied</i></p>	 <p>OX - Optiflex lens</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p> <p>NO - No lens</p>		 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
	 <p>OP - Opal lens</p>  <p>PR - Prime lens</p> <p>NO - No Lens</p>		<div style="border: 1px solid black; padding: 5px; text-align: center;">SUS</div>	 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p> <p>NO - No canopy</p>	
PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH


COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	USAGE	POWERSUPPLY/CONTROL**	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW  NO - No up light (w/ opal lens)	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>NO - No up light (w/ opal lens)</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96V - 24V Driver</p>
CCT DOWN	CCT UP	LM DOWN	LM UP	
				<div style="border: 1px solid black; padding: 5px; text-align: center;">IP22</div>
			POWERSUPPLY/CONTROL	<div style="border: 1px solid black; padding: 5px; text-align: center;">  </div>

TOOBYFOR

Wood Series



Cross-section dimensions:



The **simplicity and minimalism** of **TOOBYFOR** makes it a welcome accent in contemporary spaces. Like the rest of our Wood Series, it is engineered from recycled hardwood, for natural warmth and superior quality. It is durable with its rugged build and an aircraft-grade suspension cable, but brings a lightweight and modern touch to any interior.

FEATURES

- Engineered from sustainably harvested and recycled hardwood, for superior mechanical quality and to bring out the natural wood texture.
- Designed to give a uniform light without hot spots with an optiflex, opal or prime lens.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Available in natural or oiled finishes, or in custom wood essences and tints.

OPTIONS












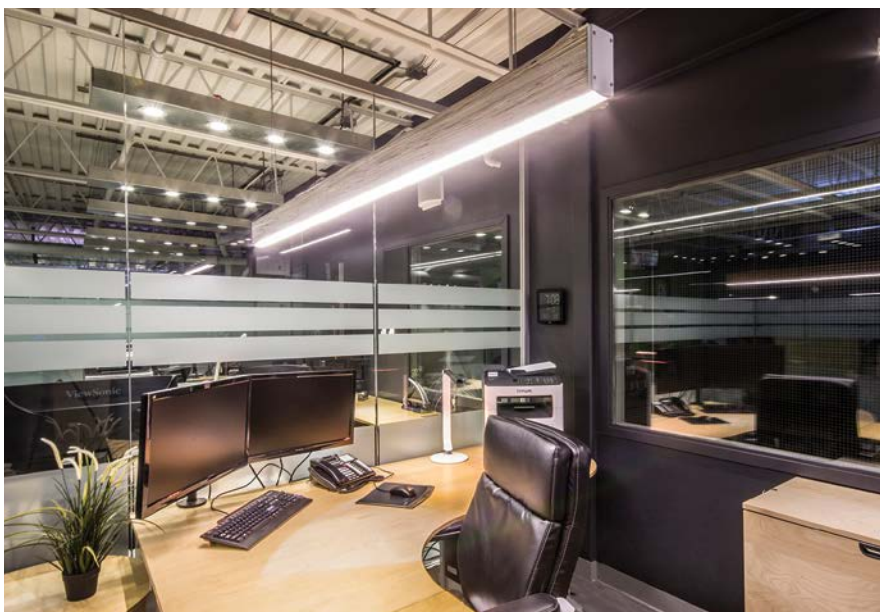









LED ENGINE COMPATIBILITY













Compatible with LED engines or PCBs up to **14mm** wide.

LINEAR WEIGHT

1.385 lbs/ft, 2.060 kg/m (without lens or insert)



PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>TOOO - Wood enclosure, Oiled finish Alu heatsink included with profile</p>	 <p>CL - Clear lens</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>
 <p>TOON - Wood enclosure, Natural finish Alu heatsink included with profile <i>NOTE: Special order, additional charges will be applied</i></p>	 <p>OX - Optiflex lens</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p>		 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
	 <p>OP - Opal lens</p>  <p>PR - Prime lens</p>  <p>NO - No Lens</p>	 <p>NO - No lens</p>	<div style="border: 1px solid black; padding: 5px; text-align: center;">SUS</div>	 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>  <p>NO - No canopy</p>	
PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH


COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	USAGE	POWERSUPPLY/CONTROL**	*NOTES	
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW  NO - No up light (w/ opal lens)	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>NO - No up light (w/ opal lens)</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96V - 24V Driver</p>	
CCT DOWN	CCT UP	LM DOWN	LM UP		
				<div style="border: 1px solid black; padding: 5px; text-align: center;">IP22</div>	
			POWERSUPPLY/CONTROL	<div style="border: 1px solid black; padding: 5px; text-align: center;">  </div>	

TAO

Wood Series



Cross-section dimensions:

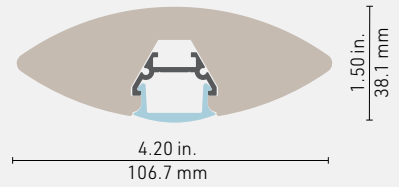

The **TAO** will hover seemingly **weightless in space**, with its organic blend of **futuristic form** and **timeless appeal** of wood. With a discreet visual signature from afar, it will unravel its texture in full from a more personal distance, all while casting light of a desired quality (and quantity).

FEATURES

- Engineered from sustainably harvested and recycled hardwood, for superior mechanical quality and to bring out the natural wood texture.
- Designed to give a uniform light without hot spots with an optiflex, opal or prime lens.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Available in natural or oiled finishes, or in custom wood essences and tints.

OPTIONS















LED ENGINE COMPATIBILITY











Compatible with LED engines or PCBs up to **14mm** wide.

LINEAR WEIGHT

1.024 lbs/ft, 1.524 kg/m (without lens or insert)



PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>TA00 - Wood enclosure, Oiled finish Alu heatsink included with profile</p>	 <p>CL - Clear lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>
 <p>TA0N - Wood enclosure, Natural finish Alu heatsink included with profile <i>NOTE: Special order, additional charges will be applied</i></p>	 <p>OX - Optiflex lens</p>		 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
	 <p>OP - Opal lens</p>		 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p>	
	 <p>PR - Prime lens</p> <p> NO - No Lens</p>		<p> NO - No canopy</p> <p>SUS</p>	
PROFILE	LENS	BRACKETS	MOUNTING HARDWARE	LENGTH


COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY / CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>I - IP22 indoor dry location</p>	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver 	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <p>TITLE 24 comp. tag</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	USAGE	POWER SUPPLY / CONTROL	

SILO

Wood Series



Cross-section dimensions:

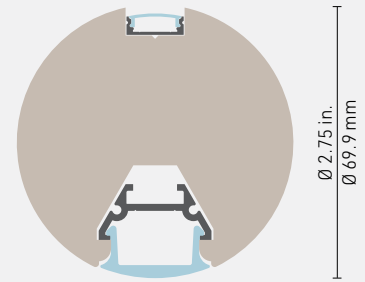

The **SILO** is another **minimalist profile** that is under 3 inches in diameter but brings all the **warmth and texture** that distinguishes our Wood Series. Its lightweight elegance is a welcome touch to contemporary spaces.

FEATURES

- Engineered from sustainably harvested and recycled hardwood, for superior mechanical quality and to bring out the natural wood texture.
- Designed to give a uniform light without hot spots with an optiflex, opal or prime lens.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Available in natural or oiled finishes, or in custom wood essences and tints.

OPTIONS













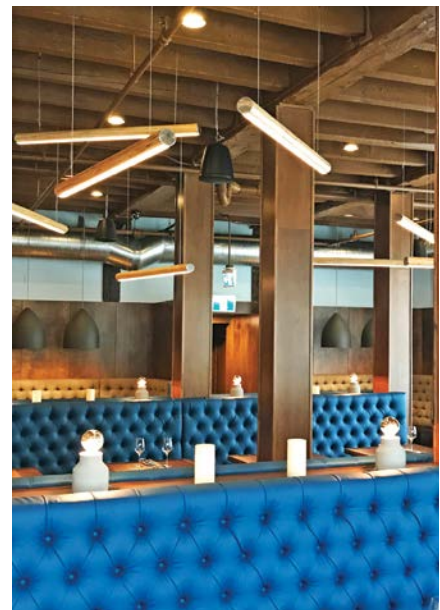





LED ENGINE COMPATIBILITY













Compatible with LED engines or PCBs up to **14mm** wide.

LINEAR WEIGHT

1.419 lbs/ft, 2.112 kg/m (without lens or insert)



PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>SIL0 - Wood enclosure, Oiled finish Alu heatsink included with profile</p>	 <p>CL - Clear lens</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>
 <p>SILN - Wood enclosure, Natural finish Alu heatsink included with profile <i>NOTE: Special order, additional charges will be applied</i></p>	 <p>OX - Optiflex lens</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p> <p>NO - No lens</p>		 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>	
	 <p>OP - Opal lens</p>  <p>PR - Prime lens</p> <p>NO - No Lens</p>		<div style="border: 1px solid black; padding: 5px; text-align: center;">SUS</div>	 <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p> <p>NO - No canopy</p>	
PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH


COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	USAGE	POWERSUPPLY/CONTROL**	*NOTES
<p> 24 - 2400K</p> <p> 27 - 2700K</p> <p> 30 - 3000K</p> <p> 35 - 3500K</p> <p> 42 - 4200K</p> <p> 53 - 5300K (LHP only)</p> <p> 62 - 6200K (LP only)</p> <p> WD - WarmDim</p> <p> RGB - RGB</p> <p> RGBW - RGBW</p> <p> NO - No up light (w/ opal lens)</p>	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>NO - No up light (w/ opal lens)</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96W - 24V Driver</p>
CCT DOWN	CCT UP	LM DOWN	LM UP	
				<div style="border: 1px solid black; padding: 5px; text-align: center;">IP22</div>
			POWERSUPPLY/CONTROL	<div style="border: 1px solid black; padding: 5px; text-align: center;">  </div>

PIKE

Wood Series



Cross-section dimensions:

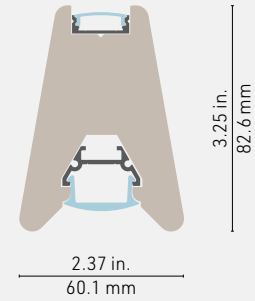

Go edgy and playful with a youthful approach on the classic of wood. The **PIKE** is the profile with the **most discreet light source** in the series, for a fresh yet unobtrusive visual presence that is particularly fit for social spaces, whether recreational or collaborative.

FEATURES

- Engineered from sustainably harvested and recycled hardwood, for superior mechanical quality and to bring out the natural wood texture.
- Designed to give a uniform light without hot spots with an optiflex, opal or prime lens.
- Custom length by sections of 2 to 144 inches (3.6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Available in natural or oiled finishes, or in custom wood essences and tints.

OPTIONS


















LED ENGINE COMPATIBILITY

Compatible with LED engines or PCBs up to **14mm** wide.

LINEAR WEIGHT

1.275 lbs/ft, 1.898 kg/m (without lens or insert)



PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>PIKO - Wood enclosure, Oiled finish Alu heatsink included with profile</p>	 <p>CL - Clear lens</p>	 <p>CL - Clear lens</p>  <p>SP - Spread lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>
 <p>PIKN - Wood enclosure, Natural finish Alu heatsink included with profile <i>NOTE: Special order, additional charges will be applied</i></p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p> <p>NO - No Lens</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>PR - Prime lens</p> <p>NO - No lens</p>		 <p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p>  <p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p> <p>NO - No canopy</p>	
PROFILE	LENS DOWN	LENS UP	SUS MOUNTING HARDWARE	CANOPY	LENGTH

COLOR TEMPERATURE	LM PACKAGE DOWN/UP*	USAGE	POWERSUPPLY/CONTROL**	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p> <p>WD - WarmDim</p> <p>RGB - RGB</p> <p>RGBW - RGBW</p> <p>NO - No up light (w/ opal lens)</p>	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>NO - No up light (w/ opal lens)</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96W - 24V Driver</p>
CCT DOWN	LM DOWN	IP22 USAGE	POWERSUPPLY/CONTROL	TITLE 24



GYPSUM SERIES






AP SIS

Gypsum Series



Cross-section dimensions:



Smooth out those corners with a **rounded light extravaganza!** The APSIS will go into any corner, whether wall or ceiling, and level out flush with the 1/2" gypsum panels. Prime and paint, mount the aluminum LED profile with your choice of lens, and breathe a brand new life into your interior. As easy as it gets!

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level with drywall mud to match seamlessly with 5/8in. panels.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.








LINEAR WEIGHT

0.848 lbs/ft, 1.262 kg/m (without aluminum profile or lens)













GYPSUM PROFILE	LENGTH
 <p>APS - Gypsum profile * Light source delivered separately from the Gypsum fixture.</p>	Available in straight section of 8 feet (96 inches/2.4 m).
QUANTITY	x 96 INCHES LENGTH

Suggested aluminum profile options (for more information see product pages pp.10-13)

ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1100 - Profile, Alu</p>  <p>1200 - 1200 Profile, alu</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>NO - No Lens</p>	 <p>3M - 3M mounting tape, 8mm</p>  <p>NO - No mounting hardware</p>	Custom length by sections of 2 to 240 inches (6m).
ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH


LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 160 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 255 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 308 LM / 4.5W FT / 90+CRI</p> <p>LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>SUS - Coaxial wire 15 Ft</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC**</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY / CONTROL	LED ENGINE LENGTH


*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

ARCUS

Gypsum Series

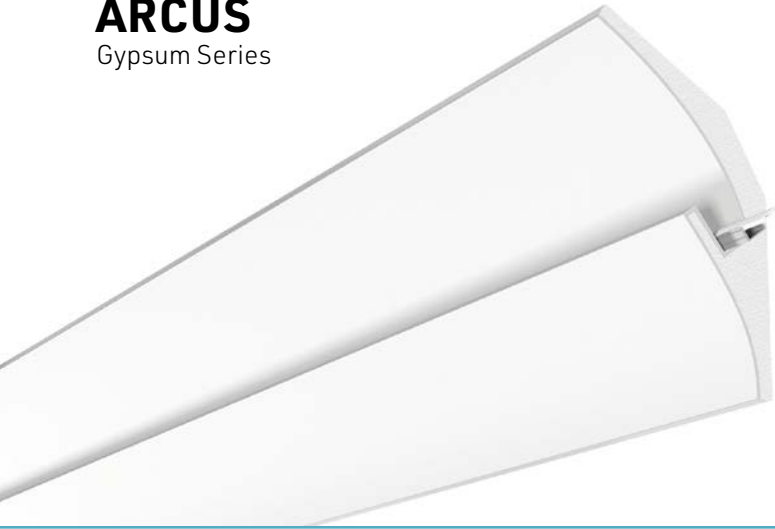

Cross-section dimensions:



The **ARCUS** moulding is designed for slanted surfaces, such as in **attics or cathedral ceiling rooms**. It levels out flush with 1/2" or 5/8" gypsum panels, and contains a recessed LED channel for smooth lighting of the ceiling perimeter. Fits most common slant angles, with room for adjustment using drywall mud. It can be primed and painted like a regular wall surface.

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level with drywall mud to match seamlessly with 5/8in. panels.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.








LINEAR WEIGHT

0.856 lbs/ft, 1.275 kg/m (without aluminum profile or lens)













GYPSUM PROFILE	LENGTH
 <p>ARC - Gypsum profile * Light source delivered separately from the Gypsum fixture.</p>	Available in straight section of 8 feet (96 inches/2.4 m).
QUANTITY	X 96 INCHES LENGTH

Suggested aluminum profile options (for more information see product pages pp.10-13)

ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1100 - Profile, Alu</p>	 <p>OX - Optiflex lens</p>	 <p>3M - 3M mounting tape, 8mm</p>	Custom length by sections of 2 to 240 inches (6m).
 <p>1200 - 1200 Profile, alu</p>	 <p>OP - Opal lens</p>	 <p>NO - No mounting hardware</p>	
	 <p>NO - No Lens</p>		
ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY / CONTROL	LED ENGINE LENGTH


*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

GEMINUS

Gypsum Series



Cross-section dimensions:



GEMINUS creates **corner alcoves** with a 2-inch wide opening, uniformly lit from both sides, for a **more emphasized linear lighting** effect. A direct fit for 1/2-inch gypsum panels, it can also be leveled with 5/8-inch ones, with the same ease of installation and effectiveness as with other Gypsum Series profiles.

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level out to 5/8in. panels with drywall mud and tape, while supporting the edges over 2x1.5in. wall/ceiling beams.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.














LINEAR WEIGHT

1.067 lbs/ft, 1.587 kg/m (without aluminum profile or lens)













GYPSUM PROFILE	LENGTH
 <p>GEM - Gypsum profile * Light source delivered separately from the Gypsum fixture.</p>	Available in straight section of 8 feet (96 inches/2.4 m).
QUANTITY	LENGTH
x	96 INCHES

Suggested aluminum profile options (for more information see product pages pp.10-13)

ALU PROFILE	2ND ALU PROFILE	LENSES	2ND LENSES	MOUNTING HARDWARE	LENGTH
 1100 - Profile, Alu	 1100 - Profile, Alu	 OX - Optiflex lens	 OX - Optiflex lens	 3M - 3M mounting tape, 8mm	Custom length by sections of 2 to 240 inches (6m).
 1200 - 1200 Profile, alu	 1200 - 1200 Profile, alu  NO - No 2nd profile	 OP - Opal lens  NO - No Lens	 OP - Opal lens  NO - No Lens	 NO - No mounting hardware	
ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH		

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI Note: Not applicable for WarmDim & RGB color temperatures	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead	I - IP22 indoor dry location	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver	Total length of LED engine in inches - See Appendix 3 on how to calculate length.
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY / CONTROL	LED ENGINE LENGTH


*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

NIDUS

Gypsum Series



Cross-section dimensions:

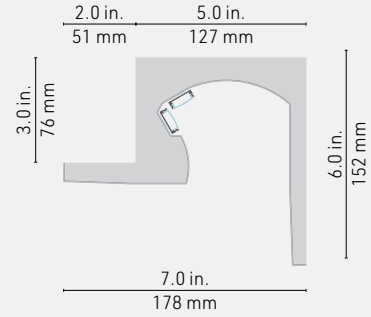

The **NIDUS** profile is an easy and affordable solution for light grazing a wall, while keeping the **LED source concealed** and the **corner visually intact**. Install over 2×3in. beams/joists, without the need to build elaborate wood structures, level with the gypsum panels, then mount the LED profile(s) at the position yielding the desired beam direction. Great above blinds or curtains!

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level out to 5/8in. panels with drywall mud and tape, while supporting the edges over 2x3in. wall/ceiling beams.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect. The profiles can be installed at one or both of the two available positions.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.








LINEAR WEIGHT

1.368 lbs/ft, 2.036 kg/m (without aluminum profile or lens)













GYPSUM PROFILE	LENGTH
 <p>NID - Gypsum profile * Light source delivered separately from the Gypsum fixture.</p>	Available in straight section of 8 feet (96 inches/2.4 m).
QUANTITY	x 96 INCHES LENGTH

Suggested aluminum profile options (for more information see product pages pp.10-13)

ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1100 - Profile, Alu</p>  <p>1200 - 1200 Profile, alu</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>NO - No Lens</p>	 <p>3M - 3M mounting tape, 8mm</p>  <p>NO - No mounting hardware</p>	Custom length by sections of 2 to 240 inches (6m).
ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>

COLOR TEMPERATURE CCT LUMEN PACKAGE LEAD IN LEAD OUT USAGE POWER SUPPLY / CONTROL LED ENGINE LENGTH


*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

SULCUS

Gypsum Series



Cross-section dimensions:

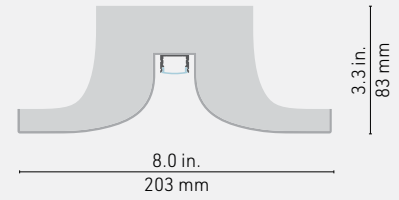

Add **smooth internally lit grooves** to your walls using the SULCUS gypsum profile. It is supported on 2x3in. joists or studs, and will level out flush with 5/8 in. gypsum panels, with a little drywall tape and mud. Paint to match your décor, and enjoy the smooth look as well as the admiration of others!

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 5/8in. gypsum panels, over 2x3in. wall/ceiling beams.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.








LINEAR WEIGHT

0.702 lbs/ft, 1.044 kg/m (without aluminum profile or lens)













GYPSUM PROFILE	LENGTH
 <p>SUL - Gypsum profile * Light source delivered separately from the Gypsum fixture.</p>	Available in straight section of 8 feet (96 inches/2.4 m).
QUANTITY	X 96 INCHES LENGTH

Suggested aluminum profile options (for more information see product pages pp.10-13)

ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1100 - Profile, Alu</p>  <p>1200 - 1200 Profile, alu</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>NO - No Lens</p>	 <p>3M - 3M mounting tape, 8mm</p>  <p>NO - No mounting hardware</p>	Custom length by sections of 2 to 240 inches (6m).
ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead</p>	I - IP22 indoor dry location	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver</p>	Total length of LED engine in inches - See Appendix 3 on how to calculate length.
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY / CONTROL	LED ENGINE LENGTH


*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

LATUS

Gypsum Series



Cross-section dimensions:

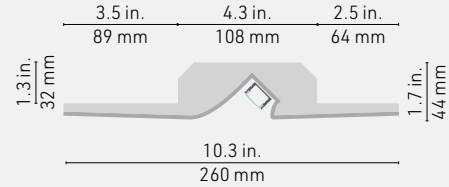

The **LATUS** is an asymmetric recessed LED moulding for drywall, allowing **washing an adjacent surface with light from a 45-degree angle**, from a distance of your choice. The uniform light distribution enhances the appearance of art and displayed items. A direct fit with standard gypsum panels, it needs only a low (1-1/4in.) back clearance, and can be easily installed between smaller beams or joists.

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 5/8in. gypsum panels.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.








LINEAR WEIGHT

0.637 lbs/ft, 0.947 kg/m (without aluminum profile or lens)













GYPSUM PROFILE	LENGTH
 <p>LAT - Gypsum profile * Light source delivered separately from the Gypsum fixture.</p>	Available in straight section of 8 feet (96 inches/2.4 m).
QUANTITY	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> 96 INCHES </div>

Suggested aluminum profile options (for more information see product pages pp.10-13)

ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>1100 - Profile, Alu</p>  <p>1200 - 1200 Profile, alu</p>	 <p>OX - Optiflex lens</p>  <p>OP - Opal lens</p>  <p>NO - No Lens</p>	 <p>3M - 3M mounting tape, 8mm</p>  <p>NO - No mounting hardware</p>	Custom length by sections of 2 to 240 inches (6m).
ALU PROFILE	LENSES	MOUNTING HARDWARE	LENGTH

LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN / OUT	USAGE	POWER SUPPLY / CONTROL	LENGTH
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD - WarmDim  RGB - RGB  RGBW - RGBW	<p>LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI</p> <p>Note: Not applicable for WarmDim & RGB color temperatures</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277V AC** D - 0/10V dimming 120/277V AC E - Non-dimming DC plug in F - DMX NO - No driver</p>	<p>Total length of LED engine in inches - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY / CONTROL	LED ENGINE LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver



LUMINAIRES






TASKLINE

Luminaire Series



Cross-section dimensions:




VISUALLY DISCREET AND YET SO POWERFUL

Introducing TaskLine, the first up and down, glare-free, miniature linear lighting system in its category. You can easily connect more than one TaskLine with our quick-link system to create a continuous run.


The highly esthetic TaskLine square-in-square optical system delivers superior visual comfort, flawless color mixing and uniform lighting. Boasting an efficacy of up to 118 lm/W and an output of up to 762 lm/ft, this linear downlight is suited for general lighting and high-ceiling applications. Available in silver, white and black finish.

UP & DOWN LIGHTING

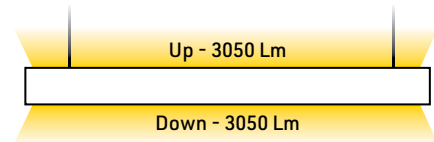

FEATURES

- Ability to connect more than one unit with our quick-link design.
- Up and down lighting.
- Integrated 0-10 V dimming solution.
- Anti-glare technology reducing eye fatigue.
- Very powerful lighting, convenient for work and commercial spaces.

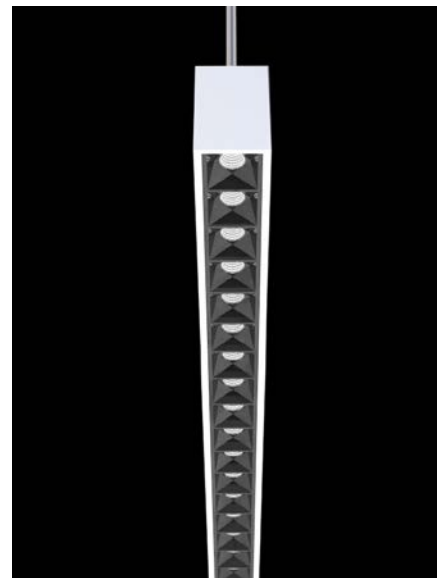

LINKABLE DESIGN

Easily connect additional taskline with our quick link design.



QUICK LINK DESIGN

Our Quick Link system bring new flexibility to linear lighting systems. Easily and quickly combine up to 15 units to create a continuous run design.

Our Quick Link design open up fresh choices for design flexibility and custom approaches.




CERTIFIED QUALITY









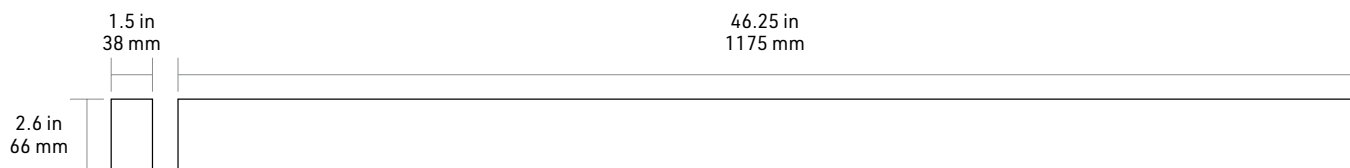





From the time of design and conception, through the final manufacturing process, LumenTruss quality is controlled and backed by leading certification authorities to ensure that you get a product that is guaranteed to perform to your expectations.



TASKLINE DIMENSIONS



TECHNICAL DATA			
Dimension	46.25 x 2.6 x 1.5 in	Max. Interconnected units	15
Weight	7 lbs / 3.2 kg	CRI	+80
Power	25W up, 25W down	Beam Range	50 degree
Efficacy	118 lm/W	Input	120/277 VAC - 50/60Hz
Lumen Output	762 Lm/ft		


LIGHTING SYSTEM	COLOR TEMPERATURE	QUANTITY
 <p>TASKLINE-50W, SILVER Up/Down-0-10V</p>	3000K 	LM00001-38
	3500K 	LM00001-40
	4000K 	LM00001-39
 <p>TASKLINE-50W, BLACK Up/Down-0-10V</p>	3000K 	LM00001-49
	3500K 	LM00001-47
	4000K 	LM00001-55
 <p>TASKLINE-50W, WHITE Up/Down-0-10V</p>	3000K 	LM00001-50
	3500K 	LM00001-48
	4000K 	LM00001-56

SERZO 2.0

Luminaire Series



Cross-section dimensions:

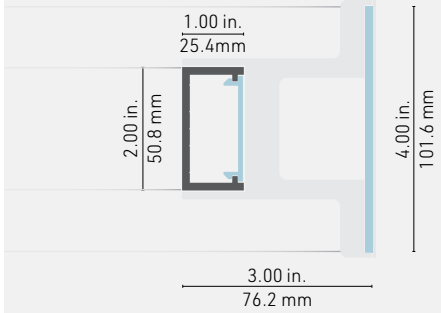

Introducing the impressive SERZO ring luminaire system, an exclusive series at LumenTruss™. The Serzo can be suspended horizontally in different angles to create a spectacular visual effect. Available in three fixed diameters of 36, 54 and 72 inches¹, they provide 360 degrees, even, dot-free omnidirectional lighting, making them particularly attractive for large spaces. The design of each ring incorporates an offset acrylic opal diffuser that gives this exceptional luminaire an elegant and refined look.

(1) Overall diameter with offset acrylic diffusers.

FEATURES

- Anodized aluminum, white, black, or custom finishing.
- 180 LED/m light source with single or double installation for high power.
- Overall diameter of 36, 54 and 72 inches.
- Made of ALCOA 6063-T5 aluminum alloy that increases heat dissipation.

OPTIONS



LED ENGINE COMPATIBILITY

The LED channel is compatible with multiple LED engines, up to **36mm (1.42")** wide in total.

WEIGHT

Serzo36: 1.288 lbs (2.232 kg)
Serzo54: 7.6064 lbs (3.450 kg)
Serzo72: 10.291 lbs (4.668 kg)

The weight varies significantly depending on product configuration. Figures provided are for the LED profiles only without lenses, mounting hardware, diffusers or reflectors.



SERZO 36 suspended, with diffuser, and with reflector.



PROFILE



Serzo 36 - Profile, 32" O.D.
S362 - White
S361 - Black
S36X - Custom color
IMPORTANT: Give RAL color No
 See Appendix 1 on page 158

RAL NUMBER



Serzo 54 - Profile, 50" O.D.
S542 - White
S541 - Black
S54X - Custom color
IMPORTANT: Give RAL color No
 See Appendix 1 on page 158

RAL NUMBER



Serzo 72 - Profile, 68" O.D.
S722 - White
S721 - Black
S72X - Custom color
IMPORTANT: Give RAL color No
 See Appendix 1 on page 158

RAL NUMBER

LENSES



OX - Serzo optiflex lens

OX

LENS

SUSPENSION



Horizontal suspension kit with
 diffuser/reflector mount and 15ft.
 aircraft cable
SUS2 - White
SUS1 - Black
SUS3 - Graphite

SUSPENSION

OUTER RING



AC - 4" Acrylic diffuser

AC

DIFFUSER/REFLECTOR

CANOPY



Remote driver canopy plate
 See Appendix 2 on page 158
CR0 - Alu
CR1 - Black
CR2 - White



Integrated driver in canopy
 See Appendix 2 on page 158
CI0 - Alu
CI1 - Black
CI2 - White



NO - No canopy

CANOPY

PROFILE


COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY/CONTROL**	*NOTES
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 	<p>SERZO 36*36L -3558 LM / 48W / 90+CRI</p> <p>36H -4234 LM / 71.78W / 90+CRI</p> <p>SERZO 54"</p> <p>54L -5574 LM / 75.3W / 90+CRI</p> <p>54H -6720 LM / 113.96W / 90+CRI</p> <p>SERZO 72"</p> <p>72L -7604 LM / 102.7W / 90+CRI</p> <p>72H -9164 LM / 155.4W / 90+CRI</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277V AC***</p> <p>D - 0/10V dimming 120/277V AC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** 54H and 72H lumen packages require installation of two drivers.</p> <p>*** Only available in 96W - 24V Driver</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	<input type="text" value="IP22"/>	POWER SUPPLY/CONTROL	

STUD DOWN

Luminaire Series



Cross-section dimensions:



Offered in two popular lengths, the STUD is a linear luminaire system designed to be suspended. It is robust and powerful. With a CRI of 92+, UL-certified LED light sources provide exceptional quality linear illumination in a high-power version. It is equipped with an Optiflex lens that diffuses the light evenly, without dots, in a beam of 180 degrees with a built in intergrated 0-10V dimming driver. A tool-free, exclusive assembly eliminates hardware clutter for a clean look. Ideal for offices and commercial spaces.

FEATURES

- Dimensions: 3 "wide, 4" high, and 48 "or 96" long.
- Made of ALCOA 6063-T5 aluminum alloy for superior heat dissipation and LED longevity.
- The Optiflex (frosted) lens, combined with the distance from the LED source to the lens, allows for a dot-free light appearance.
- Choice of 3 color temperatures: 3000 K, 3500 K and 4000 K.
- Transformer integrated.
- Tool-free mounting kit with rubber tabs and magnetic bits, exclusive to LumenTruss™
- The suspension cables can be slided anywhere on the top of the luminaire for greater flexibility of installation

OPTIONS



LED ENGINE COMPATIBILITY

STUD is designed for use with proprietary rigid 1.5in wide LED PCBs.

LINEAR WEIGHT


2.863 lbs/ft, 4.261 kg/m

Figures provided for the aluminum profiles only – outer and inner enclosures, heatsink. The complete assembly, with LED light sources, reflectors, power supplies, endcaps, mounting hardware etc. will be greater, and will vary depending on product configuration.




STUD down ordering sheet

Luminaire Series

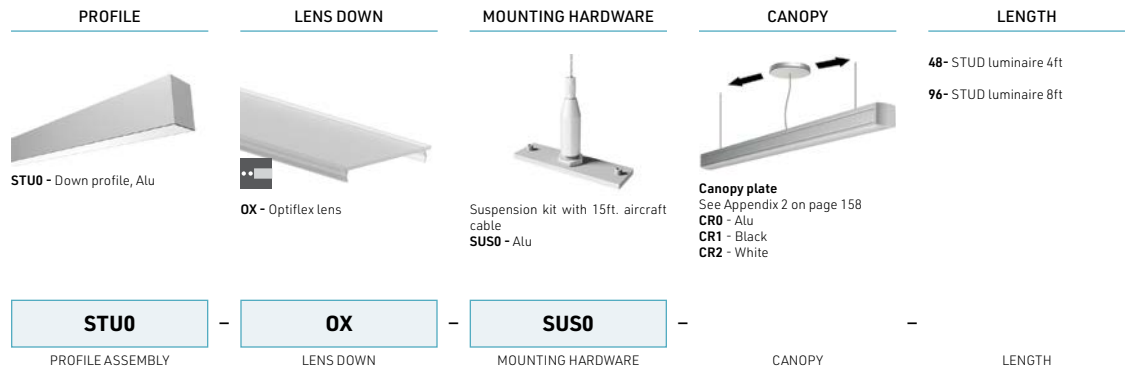

Luminaire

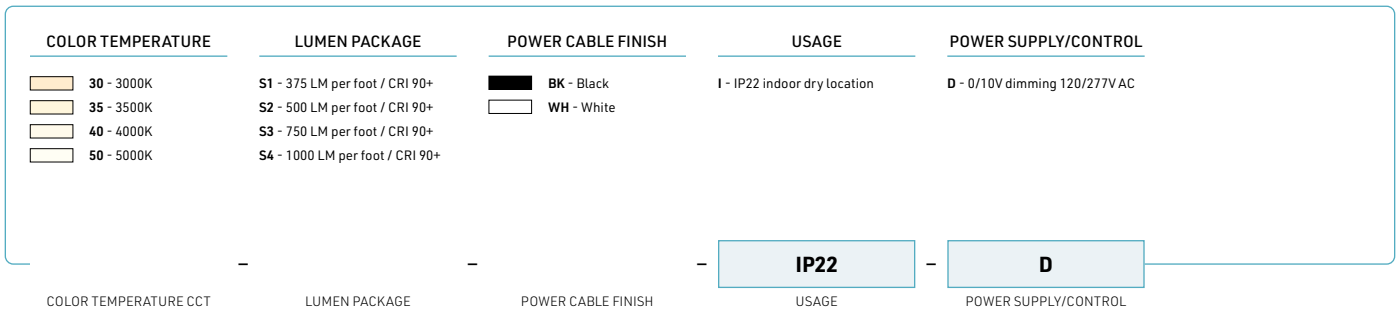


LIGHT TASK

Luminaire Series



Cross-section dimensions:

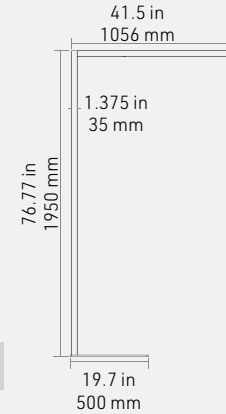


WITH TUNABLE WHITE!

The aluminum Light Task floor lamp is designed with intelligent lighting control, daylight adjustment and movement detection. You can configure these controls to your liking and the lamp will automatically turn on when sensing your presence and adjust its lighting output so that a relatively constant level of illumination is maintained throughout the day. Its straight and clean lines will give a modern look to your decor.


FEATURES

- Configurable daylight sensor and motion sensor.
- Daylight adjustment directly and indirectly.
- Regulation of amount of light when absent, resuming automatically by motion sensor.
- Manual dimming available for room light (indirect light) and direct light.
- Anti-glare technology reducing eye fatigue.

UP & DOWN LIGHTING

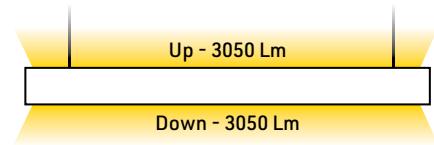


VARIABLE COLOR



A WIDE RANGE OF SETTINGS


Use the touch panel to manually adjust the light intensity.

SENSORS AND SETTING SWITCH

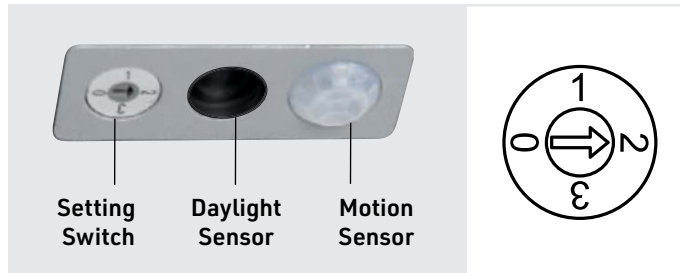

SWITCH POSITION	MOTION SENSOR	DAYLIGHT SENSOR
0	OFF	OFF
1	ON	OFF
2	ON	ON
3	OFF	ON

MOTION SENSOR

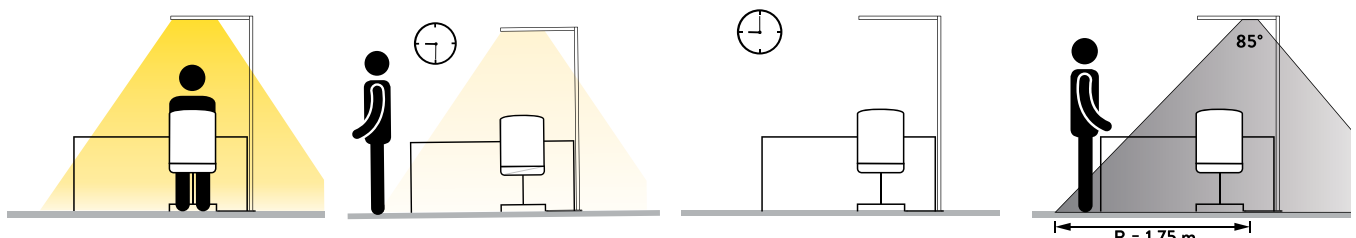

Turn on the lamp.


After 30 min, without presence, output of the luminaire is reduced to 30% automatically.

After 30 min, without presence, output of the luminaire automatically switches off.

When presence detected, the luminaire switches on immediately. Detection angle 85°

R = 1,75 m

DAYLIGHT SENSOR

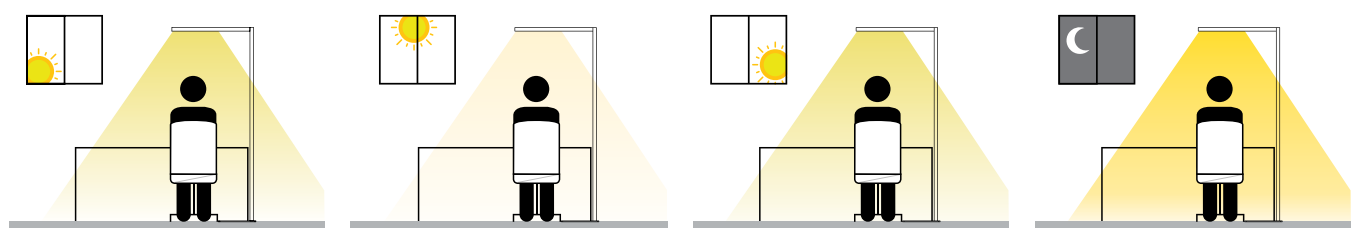

After each manual dimming, the set value is stored together with the value of the ambient light, measured by the sensor.

When the ambient light change or re-dimming, the output of the lamp is adjusted so that a relatively constant level of illumination are maintained, optimal for desk work.

TOUCH PANEL



Upper area:
 - Indirect light On/Off switch
 - indirect light: dimming

Middle area:
 - On/Off switch
 - Adjust color temperature in tunable white.

Lower area:
 - Direct light On/Off switch
 - Direct light: dimming

CERTIFIED QUALITY




From the time of design and conception, through the final manufacturing process, LumenTruss quality is controlled and backed by leading certification authorities to ensure that you get a product that is guaranteed to perform to your expectations.

WITH SEPARATE UP & DOWN CONTROLS, LIGHT TASK GIVES YOU MANY OPTIONS



LIGHT TASK DIMENSIONS

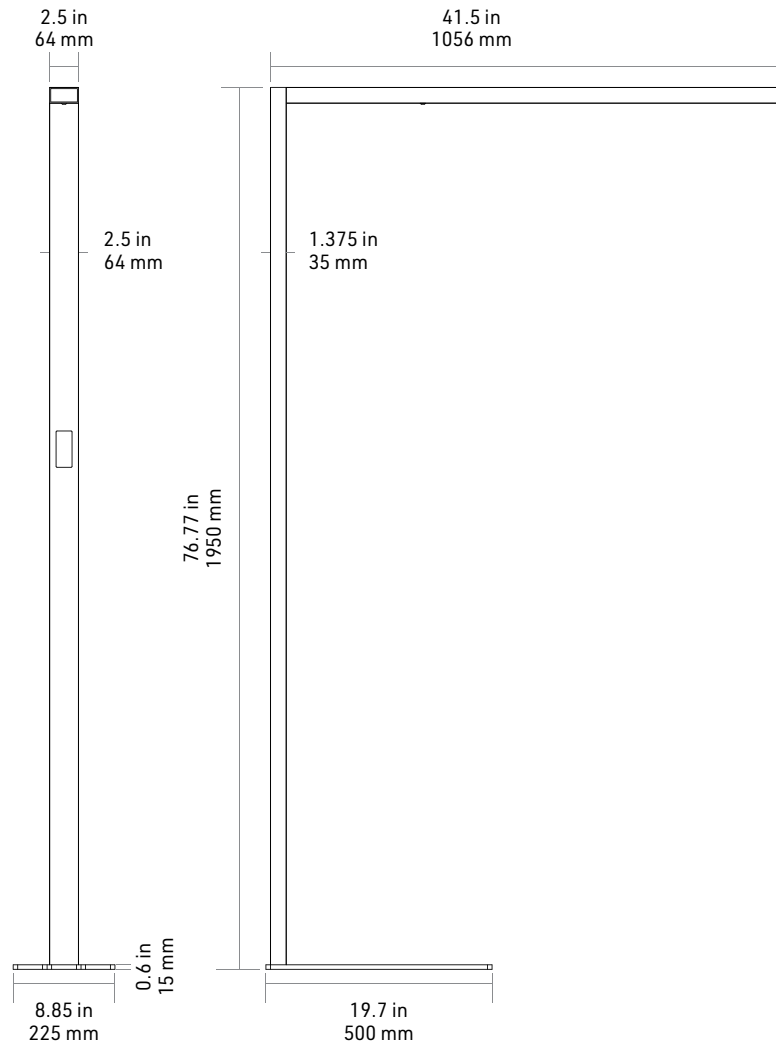

TECHNICAL DATA

Dimension	46.25 x 2.6 x 1.5 in	Beam angle	50° direct, 120° indirect
Power	25W up, 25W down	Dimming	Touch-dim
Power Consumption	80kwh/1000h	Protection Rating	IP20
Lumen Output	762 Lm/ft	Warranty	5 year warranty

LUMINAIRE TYPE	QUANTITY
 LIGHT TASK, SILVER	LM00001-25
 LIGHT TASK, BLACK	LM00001-45
 LIGHT TASK, WHITE	LM00001-46

Lamp



RECESSED & TRACK LIGHT SYSTEM






OMEGA

Recessed Downlight



Cross-section dimensions:



Shown: Trimless model (See page 134 for other models).



The quality of light of this Series is comparable to that of a halogen lamp offering crisp, directional light which perfectly highlights surroundings. It offers a CRI of 90 and glare-control reflector design.

This small LED module provides higher lumen performance than an LED lamp and is very easy to install. Without the need of a housing, it is installed directly in the ceiling using torsion springs and most models are IC rated. The LED module is fitted with an external dimmable driver. Omega is also offering style, discretion and flexibility with a wide selection of interchangeable trims and accessories.

FEATURES

- Anti-glare reflector design UGR \leq 19
- Available in 6 W (IC rated) with three different beam angle options: 22°, 36° and 60°
- Reproduces the crisp white light of an MR16 halogen lamp
- 50 000 hours
- High CRI of 90
- Discreet look and sleek design
- Dimmable
- Designed to meet North American woodworking standards.






OMEGA TRIMLESS KIT - MODERN & STUNNING


AN INSTANT CLASSIC

The Omega trimless kit is our new favorite LED Recessed luminaire! Minimalist with the newest in technology. The kit is available in silver, white or black. One of the advantages is that it is designed to be plastered into ceilings to give a seamless appearance. A great choice to get a clean and modern look.

Recessed

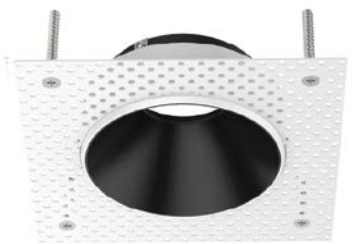

Kit Trimless Black

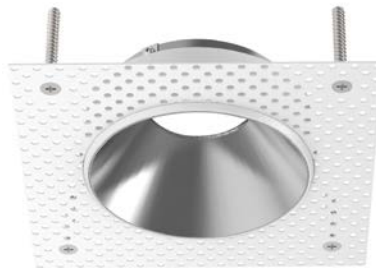

Kit Trimless Silver



Kit Trimless White



OMEGA MODULES AND TRIMS DIMENSIONS

QUALITY CONSTRUCTION

The Omega Series is designed and manufactured using high quality materials.

EASE OF INSTALLATION

This LED downlight is easy to install with no need for a housing and it comes equipped with torsion springs.

VERSATILITY

With interchangeable trims and reflectors, this product can be adapted to all types of designs and applications.


PLEASING LIGHT

The Omega Series reproduces the crisp white look of a halogen MR16 lamp at a fraction of the energy cost

SUPERIOR PERFORMANCE


The Omega Series produces more light output than a regular LED MR16 or GU10 lamp.

RA2 - SA2




3 3/4" (95 mm)

RS2




3" (76.5 mm)

RR2



3 1/2" (89 mm)

















KT0 - KT1 - KT2










3 1/8" (79 mm)

Omega ordering sheet

Recessed downlight

COLOR TEMPERATURE	LUMINOSITY	BEAM ANGLE	TRIM		QUANTITY
27 - 2700K 	670 - 670 lm, CRI 90+ 	22 - 22 degrees 			 OMEGA 6W
30 - 3000K 		36 - 36 degrees 			
35 - 3500K 		60 - 60 degrees 			
40 - 4000K 					

			KT0 - Kit trimless silver  3 3/8" (79mm)	RA2 - Round adjustable, White  3 3/4" (95mm)	
			KT1 - Kit trimless black  3 3/8" (79mm)	SA2 - Square adjustable, White  3 3/4" (95mm)	
			KT2 - Kit trimless white  3 3/8" (79mm)	RR2 - Round recessed, White  3 1/2" (89mm)	
				RS2 - Round shower, White  3" (76.5mm)	

COLOR TEMPERATURE	- 670 -	LUMINOSITY	BEAM ANGLE	TRIM	QUANTITY
COLOR TEMPERATURE	- 670 -	LUMINOSITY	BEAM ANGLE	TRIM	QUANTITY
COLOR TEMPERATURE	- 670 -	LUMINOSITY	BEAM ANGLE	TRIM	QUANTITY
COLOR TEMPERATURE	- 670 -	LUMINOSITY	BEAM ANGLE	TRIM	QUANTITY


Recessed

TRAXX SPOTLIGHT

Track light system



Cross-section dimensions:

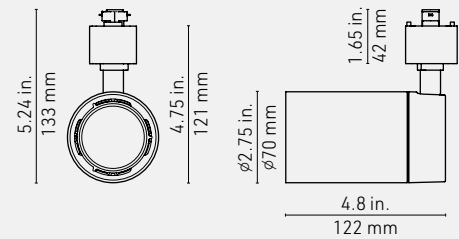


Shown: 15W model (see opposite page for 8W dimensions).



Elegant and powerful, the TRAXX track light system from LumenTruss™ enhances the decorative elements or products you want to highlight. With its interchangeable heads providing 3 projection angles and a choice of 4 color temperatures, this track-mounted spotlight is ideal for high-end applications. Its modular design, removable and tool-free, makes it an exceptionally versatile LED spotlight.

FEATURES




- Lumen output (15W) 1200lm - 4000K
- Lumen output (8W) 465lm - 4000K
- 8W & 15 W, 120V, 50,000 hours.
- interchangeable projection angles : 15°, 38° and 60°.
- Four color temperatures to choose from: 2700K, 3000K, 3500K and 4000K.
- CAMETA anti-glare design with protective angle to reduce glare.
- Can be used with most dimmers with variable intensity.
- Integral regulators, isolated circuit.
- Passive cooling achieved through innovative thermal design.
- Rotation 350° (horizontal), adjustable to 90° (vertical).
- Compatible with Type J, Type H, and Type L.

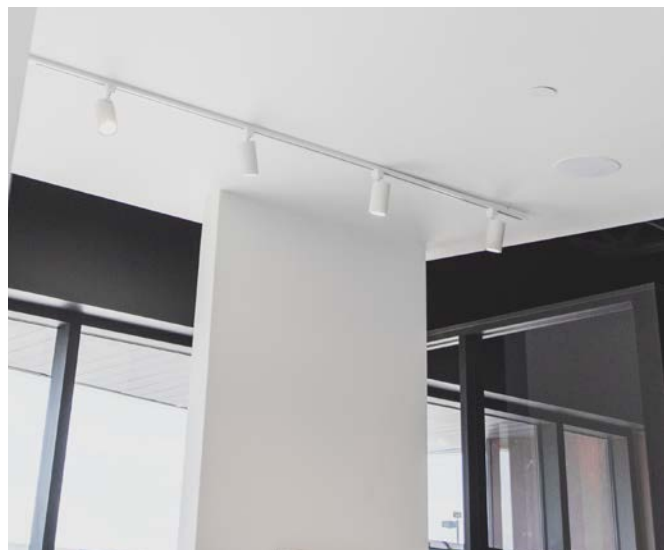






DIMENSIONS - 15W & 8W



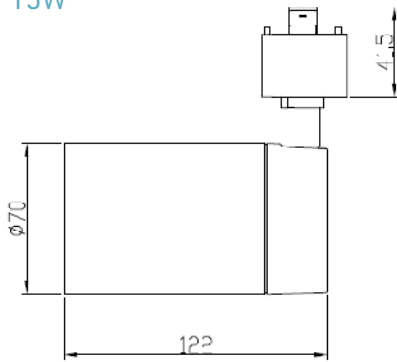

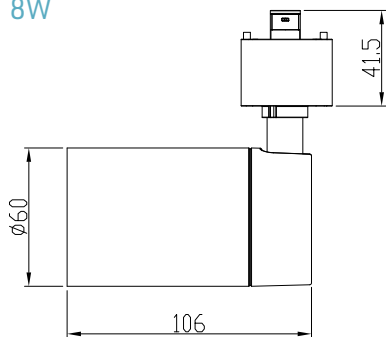


15W






























8W





INPUT POWER	SPOTLIGHT COLOR	COLOR TEMPERATURE	BEAM ANGLE	BASE CONNECTOR	QUANTITY
8 8W	 TRX1 - Spotlight, black	27 - 2700K 	15 - 15 degrees 	TJ - Type J	
15 15W		30 - 3000K 	38 - 38 degrees 	TH - Type H	
	 TRX2 - Spotlight, White	35 - 3500K 	60 - 60 degrees 	TL - Type L	
		40 - 4000K 			
INPUT POWER	SPOTLIGHT COLOR	COLOR TEMPERATURE	BEAM ANGLE	BASE CONNECTOR	QUANTITY
INPUT POWER	SPOTLIGHT COLOR	COLOR TEMPERATURE	BEAM ANGLE	BASE CONNECTOR	QUANTITY

TRACK COLOR	TRACK TYPE	QUANTITY	ACCESSORIES	COLOR	QUANTITY
 Black	 Track type H, 8 feet, black LM55000-1		 Joiner connector	Black LM55002-1 	
	 Track type H, 4 feet, black LM55000-11			White LM55002 	
 White	 Track type H, 8 feet, white LM55000		 L Connector	Black LM55003-1 	
	 Track type H, 4 feet, white LM55000-10			White LM55003 	
			 T Connector	Black LM55004 	
				White LM55004 	
			 Endcap for Track	Black LM55005-1 	
				White LM55005 	
			 Live End Connector	Black LM55001-1 	
				White LM55001 	
			 Floating Canopy	Black LM55014-1 	
				White LM55014 	
			 Monopoint Canopy	Black LM55015-1 	
				White LM55015 	

Spotlight



LED ENGINES + PSU





B3528-XXV-60-8MM-4.8W-XXK-IPYY

LED Engines



FEATURES

- Lumen output: 12V = 113.5 lm/ft, 24V = 128 lm/ft
- Single row, SMD 3528
- 18.3 LED/ft / 60 LED/m
- Width: 5/16 in / 8mm
- Length: 16.4ft / 5m
- 12V / 24V
- 1.46 W/ft / 4.8W/m



12V LED ENGINE - IP22	QUANTITY	12V LED ENGINE - IP68	QUANTITY
B3528-12V-60-8mm-4.8W-2700K-IP22		B3528-12V-60-8mm-4.8W-2700K-IP68	
B3528-12V-60-8mm-4.8W-3000K-IP22		B3528-12V-60-8mm-4.8W-3000K-IP68	
B3528-12V-60-8mm-4.8W-3500K-IP22		B3528-12V-60-8mm-4.8W-3500K-IP68	
B3528-12V-60-8mm-4.8W-4200K-IP22		B3528-12V-60-8mm-4.8W-4200K-IP68	
B3528-12V-60-8mm-4.8W-6200K-IP22		B3528-12V-60-8mm-4.8W-6200K-IP68	

24V LED ENGINE - IP22	QUANTITY	24V LED ENGINE - IP68	QUANTITY
B3528-24V-60-8mm-4.8W-2700K-IP22		B3528-24V-60-8mm-4.8W-2700K-IP68	
B3528-24V-60-8mm-4.8W-3000K-IP22		B3528-24V-60-8mm-4.8W-3000K-IP68	
B3528-24V-60-8mm-4.8W-3500K-IP22		B3528-24V-60-8mm-4.8W-3500K-IP68	
B3528-24V-60-8mm-4.8W-4200K-IP22		B3528-24V-60-8mm-4.8W-4200K-IP68	
B3528-12V-60-8mm-4.8W-6200K-IP22		B3528-12V-60-8mm-4.8W-6200K-IP68	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	USAGE	LEAD IN / OUT	STRIP LENGTH
B3528 - 3.5 x 2.8mm	12V - 12 volt 24V - 24 volt	60 - 60 LED/m	8mm (5/16 in.)	4.8 W/m (1.5 W/ft)	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> 2700K</div> <div style="display: flex; align-items: center;"> 3000K</div> <div style="display: flex; align-items: center;"> 3500K</div> <div style="display: flex; align-items: center;"> 4200K</div> <div style="display: flex; align-items: center;"> 6200K</div> </div>	IP22 - indoor dry location IP68 - wet/damp location	HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire cust. DC3 - DC plug 36" DC6 - DC plug 72" DC9 - DC plug 108" DCX - DC plug cust. NO - No lead	Custom length up to 420 inches. Quick ship regular roll is 196 inches - 12 in HW only.

B3528	-	60	-	8MM	-	4.8W	-		-		-			
SMD TYPE		LED/M		WIDTH		W/M		CCT		USAGE		IN	OUT	LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.

B3528-24V-120-8MM-4.8W-XXK-IPYY-NDA

LED Engines



FEATURES

- Lumen output: 24V = 160 lm/ft
- Single row, SMD 3528
- 36.6 LED/ft / 120 LED/m
- Width: 5/16 in / 8mm
- Length: 16.4ft / 5m
- 24V
- 1.46 W/ft / 4.8W/m



24V LED ENGINE - IP22	QUANTITY	24V LED ENGINE - IP68	QUANTITY
B3528-24V-120-8mm-4.8W-2400K-IP22-NDA		B3528-24V-120-8mm-4.8W-2400K-IP68-NDA	
B3528-24V-120-8mm-4.8W-2700K-IP22-NDA		B3528-24V-120-8mm-4.8W-2700K-IP68-NDA	
B3528-24V-120-8mm-4.8W-3000K-IP22-NDA		B3528-24V-120-8mm-4.8W-3000K-IP68-NDA	
B3528-24V-120-8mm-4.8W-3500K-IP22-NDA		B3528-24V-120-8mm-4.8W-3500K-IP68-NDA	
B3528-24V-120-8mm-4.8W-4200K-IP22-NDA		B3528-24V-120-8mm-4.8W-4200K-IP68-NDA	
B3528-24V-120-8mm-4.8W-6200K-IP22-NDA		B3528-24V-120-8mm-4.8W-6200K-IP68-NDA	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	USAGE	LEAD IN / OUT	STRIP LENGTH	
B3528 - 3.5 x 2.8mm	24V - 24 volt	120 - 120 LED/m	8mm (5/16 in.)	4.8 W/m (4.4 W/ft)	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> 2400K</div> <div style="display: flex; align-items: center;"> 2700K</div> <div style="display: flex; align-items: center;"> 3000K</div> <div style="display: flex; align-items: center;"> 3500K</div> <div style="display: flex; align-items: center;"> 4200K</div> <div style="display: flex; align-items: center;"> 5300K</div> </div>	<p>IP22 - indoor dry location</p> <p>IP68 - wet/damp location</p>	<p>HW3 - Hardwire 36"</p> <p>HW6 - Hardwire 72"</p> <p>HW9 - Hardwire 108"</p> <p>HWX - Hardwire cust.</p> <p>DC3 - DC plug 36"</p> <p>DC6 - DC plug 72"</p> <p>DC9 - DC plug 108"</p> <p>DCX - DC plug cust.</p> <p>NO - No lead</p>	<p>Custom length up to 420 inches.</p> <p>Quick ship regular roll is 196 inches - 12 in HW only.</p>	
B3528	24V	120	8MM	4.8W					
SMD TYPE	INPUT VOLTAGE	LED/M	WIDTH	W/M	CCT	USAGE	IN	OUT	LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.

B3528-XXV-120-8MM-9.6W-XXK-IPYY

LED Engines



FEATURES

- Lumen output: 12V = 232.1 lm/ft, 24V = 255 lm/ft
- Single row, SMD 3528
- 36.6 LED/ft / 120 LED/m
- Width: 5/16 in / 8mm
- Length: 16.4ft / 5m
- 12V / 24V
- 2.93 W/ft / 9.6 W/m



12V LED ENGINE - IP22	QUANTITY	12V LED ENGINE - IP68	QUANTITY
B3528-12V-120-8mm-9.6W-2700K-IP22		B3528-12V-120-8mm-9.6W-2700K-IP68	
B3528-12V-120-8mm-9.6W-3000K-IP22		B3528-12V-120-8mm-9.6W-3000K-IP68	
B3528-12V-120-8mm-9.6W-3500K-IP22		B3528-12V-120-8mm-9.6W-3500K-IP68	
B3528-12V-120-8mm-9.6W-4200K-IP22		B3528-12V-120-8mm-9.6W-4200K-IP68	
B3528-12V-120-8mm-9.6W-6200K-IP22		B3528-12V-120-8mm-9.6W-6200K-IP68	

24V LED ENGINE - IP22	QUANTITY	24V LED ENGINE - IP68	QUANTITY
B3528-12V-120-8mm-9.6W-2700K-IP22		B3528-12V-120-8mm-9.6W-2700K-IP68	
B3528-12V-120-8mm-9.6W-3000K-IP22		B3528-12V-120-8mm-9.6W-3000K-IP68	
B3528-12V-120-8mm-9.6W-3500K-IP22		B3528-12V-120-8mm-9.6W-3500K-IP68	
B3528-12V-120-8mm-9.6W-4200K-IP22		B3528-12V-120-8mm-9.6W-4200K-IP68	
B3528-12V-120-8mm-9.6W-6200K-IP22		B3528-12V-120-8mm-9.6W-6200K-IP68	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	USAGE	LEAD IN / OUT	STRIP LENGTH	
B3528 - 3.5 x 2.8mm	12V - 12 volt 24V - 24 volt	120 - 120 LED/m	8mm (5/16 in.)	9.6 W/m (2.9 W/ft)	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> 2700K</div> <div style="display: flex; align-items: center;"> 3000K</div> <div style="display: flex; align-items: center;"> 3500K</div> <div style="display: flex; align-items: center;"> 4200K</div> <div style="display: flex; align-items: center;"> 6200K</div> </div>	IP22 - indoor dry location IP68 - wet/damp location	HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire cust. DC3 - DC plug 36" DC6 - DC plug 72" DC9 - DC plug 108" DCX - DC plug cust. NO - No lead	Custom length up to 420 inches. Quick ship regular roll is 196 inches - 12 in HW only.	
B3528		120	8MM	9.6W					
SMD TYPE	INPUT VOLTAGE	LED/M	WIDTH	W/M	CCT	USAGE	IN	OUT	LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.

B3528-24V-180-8MM-14.5W-XXK-IPYY

LED Engines



FEATURES

- Lumen output: 24V = 308 lm/ft
- Single row, SMD 3528
- 54.9 LED/ft / 180 LED/m
- Width: 5/16 in / 8mm
- Length: 16.4ft / 5m
- 24V
- 4.4 W/ft / 14.5 W/m



24V LED ENGINE - IP22	QUANTITY	24V LED ENGINE - IP68	QUANTITY
B3528-24V-180-8mm-14.5W-2400K-IP22		B3528-24V-180-8mm-14.5W-2400K-IP68	
B3528-24V-180-8mm-14.5W-2700K-IP22		B3528-24V-180-8mm-14.5W-2700K-IP68	
B3528-24V-180-8mm-14.5W-3000K-IP22		B3528-24V-180-8mm-14.5W-3000K-IP68	
B3528-24V-180-8mm-14.5W-3500K-IP22		B3528-24V-180-8mm-14.5W-3500K-IP68	
B3528-24V-180-8mm-14.5W-4200K-IP22		B3528-24V-180-8mm-14.5W-4200K-IP68	
B3528-24V-180-8mm-14.5W-5300K-IP22		B3528-24V-180-8mm-14.5W-5300K-IP68	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	USAGE	LEAD IN / OUT	STRIP LENGTH	
B3528 - 3.5 x 2.8mm	24V - 24 volt	180 - 180 LED/m	8mm (5/16 in.)	14.5 W/m (4.4 W/ft)	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> 2400K</div> <div style="display: flex; align-items: center;"> 2700K</div> <div style="display: flex; align-items: center;"> 3000K</div> <div style="display: flex; align-items: center;"> 3500K</div> <div style="display: flex; align-items: center;"> 4200K</div> <div style="display: flex; align-items: center;"> 5300K</div> </div>	IP22 - indoor dry location IP68 - wet/damp location	HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire cust. DC3 - DC plug 36" DC6 - DC plug 72" DC9 - DC plug 108" DCX - DC plug cust. NO - No lead	Custom length up to 420 inches. Quick ship regular roll is 196 inches - 12 in HW only.	
B3528	24V	180	8MM	14.5W					
SMD TYPE	INPUT VOLTAGE	LED/M	WIDTH	W/M	CCT	USAGE	IN	OUT	LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.

B2835-24V-240-10MM-23W-XXK-IPYY-HOS

LED Engines



FEATURES

- Lumen output: 24V = 700 lm/ft
- Single row, SMD 2835
- 73 LED/ft / 240 LED/m
- Width: 3/8 in / 10mm
- Length: 16.4ft / 5m
- 24V
- 7 W/ft / 23 W/m
- 113.1 lm/W (5300K)



24V LED ENGINE - IP22		QUANTITY	24V LED ENGINE - IP68		QUANTITY
B2835-24V-240-10mm-23W-2400K-IP22-HOS	LM21423-01		B2835-24V-240-10mm-23W-2400K-IP68-HOS	LM21423-20	
B2835-24V-240-10mm-23W-2700K-IP22-HOS	LM21423-02		B2835-24V-240-10mm-23W-2700K-IP68-HOS	LM21423-22	
B2835-24V-240-10mm-23W-3000K-IP22-HOS	LM21423-03		B2835-24V-240-10mm-23W-3000K-IP68-HOS	LM21423-24	
B2835-24V-240-10mm-23W-3500K-IP22-HOS	LM21423-04		B2835-24V-240-10mm-23W-3500K-IP68-HOS	LM21423-26	
B2835-24V-240-10mm-23W-4200K-IP22-HOS	LM21423-05		B2835-24V-240-10mm-23W-4200K-IP68-HOS	LM21423-28	
B2835-24V-240-10mm-23W-5300K-IP22-HOS	LM21423-06		B2835-24V-240-10mm-23W-5300K-IP68-HOS	LM21423-30	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	USAGE	LEAD IN / OUT	STRIP LENGTH	
B2835 - 2.8 x 3.5mm	24V - 24 volt	240 - 240 LED/m	10mm (3/8 in.)	23W/m (7 W/ft)	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> 2400K</div> <div style="display: flex; align-items: center;"> 2700K</div> <div style="display: flex; align-items: center;"> 3000K</div> <div style="display: flex; align-items: center;"> 3500K</div> <div style="display: flex; align-items: center;"> 4200K</div> <div style="display: flex; align-items: center;"> 5300K</div> </div>	IP22 - indoor dry location IP68 - wet/damp location	HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire cust. DC3 - DC plug 36" DC6 - DC plug 72" DC9 - DC plug 108" DCX - DC plug cust. NO - No lead	Custom length up to 420 inches. Quick ship regular roll is 196 inches - 12 in HW only.	
B2835	24V	240	10mm	23W					
SMD TYPE	INPUT VOLTAGE	LED/M	WIDTH	W/M	CCT	USAGE	IN	OUT	LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.


B5050-24V-60-10MM-14.4W-RGB-IPYY

LED Engines




FEATURES

- Single row, SMD 5050
- 18.3 LED/ft / 60 LED/m
- Width: 3/8 in / 10mm
- Length: 16.4ft / 5m
- 24V
- 4.4 W/ft / 14.4 W/m




24V LED ENGINE - IP22		QUANTITY	24V LED ENGINE - IP68		QUANTITY
B5050-24V-60-10mm-14.4W-RGB-IP22	LM28336		B5050-24V-60-10mm-14.4W-RGB-IP68	LM28338	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	COLOR	USAGE	LEAD IN / OUT	STRIP LENGTH	
B5050 - 5 x 5mm	24V - 24 volt	60 - 60 LED/m	10mm (3/8 in.)	14.4W/m (4.4 W/ft)	 RGB	IP22 - indoor dry location IP68 - wet/damp location	HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire cust. DC3 - DC plug 36" DC6 - DC plug 72" DC9 - DC plug 108" DCX - DC plug cust. NO - No lead	Custom length up to 420 inches. Quick ship regular roll is 196 inches - 12 in HW only.	
B5050	24V	60	10MM	14.4W	RGB				
SMD TYPE	INPUT VOLTAGE	LED/M	WIDTH	W/M	RGB / RGBW	USAGE	IN	OUT	LENGTH


B5050-24V-60-10MM-14.4W-RGB+WHITE-IPYY

LED Engines

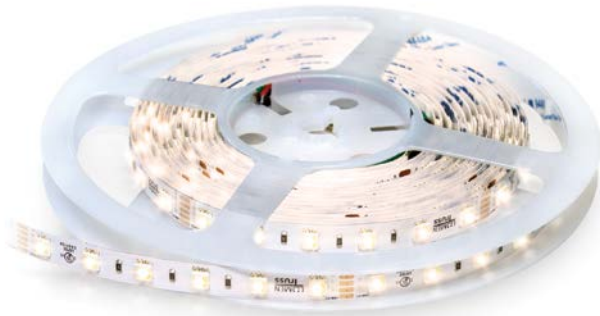

FEATURES

- Single row, SMD 5050
- 18.3 LED/ft / 60 LED/m
- Width: 3/8 in / 10mm
- Length: 16.4ft / 5m
- 24V
- 4.4 W/ft / 14.4 W/m



24V LED ENGINE - IP22

QUANTITY


24V LED ENGINE - IP68

QUANTITY

B5050-24V-60-10mm-14.4W-RGB+WHITE-IP22 LM28340-21

B5050-24V-60-10mm-14.4W-RGB+WHITE-IP68 LM28340-11

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	COLOR	USAGE	LEAD IN / OUT	STRIP LENGTH	
B5050 - 5 x 5mm	24V - 24 volt	60 - 60 LED/m	10mm (3/8 in.)	14.4W/m (4.4 W/ft)	 RGBW	<p>IP22 - indoor dry location</p> <p>IP68 - wet/damp location</p>	<p>HW3 - Hardwire 36"</p> <p>HW6 - Hardwire 72"</p> <p>HW9 - Hardwire 108"</p> <p>HWX - Hardwire cust.</p> <p>DC3 - DC plug 36"</p> <p>DC6 - DC plug 72"</p> <p>DC9 - DC plug 108"</p> <p>DCX - DC plug cust.</p> <p>NO - No lead</p>	<p>Custom length up to 420 inches.</p> <p>Quick ship regular roll is 196 inches - 12 in HW only.</p>	
B5050	24V	60	10MM	14.4W	RGBW				
SMD TYPE	INPUT VOLTAGE	LED/M	WIDTH	W/M	RGB / RGBW	USAGE	IN	OUT	LENGTH

A modern office interior featuring a prominent yellow duct-like structure on the ceiling, illuminated by long, thin LED light fixtures. The space includes a wooden table with blue and black stools, a desk with a yellow wire chair, and a large window with a potted plant. A glass-walled office is visible in the background.

LEDS
TALK ABOUT
YOUR
PROJECTS

LUXLINE

TIRED OF YOUR LED DRIVERS?

No drivers required up to 164 ft.



YOUR SOLUTION TO LONG LED RUN

350 LM/FT

LUXLINE FEATURES


- LumenTruss Driverless technology.
- Direct line voltage.
- Constant current IC providing uniform intensity over the entire run.
- Uses North American power plug with built-in fuse.
- 164 FT maximum run.
- Ultra high lumen output.
- Architectural grade.
- PVC coating (not recommended for direct sunlight).
- IP65.
- 3 year warranty.
- Life of 50,000 hours
- NOTICE: Do not cut AC plug.

164 Ft MAX	120V Plug & Play or Hardwire	115 LM/W	CUSTOM LENGTHS
	DRIVER		TITLE 20 COMPLIANT

LUXLINE DRIVERLESS TECHNOLOGY UP TO 164 LINEAR FT


PLUG-IN AND HARDWIRE VERSIONS

Plug-in Connection Diagram



Hardwire Connection Diagram


With the NEW revolutionary hardwire connection with built-in fuse! Exclusive to LumenTruss.



120V LED ENGINE - IP65	QUANTITY	120V LED ENGINE - IP65	QUANTITY
B3056-LUXLINE120-72-16MM-13.2W-2400K LM28500-15		B3056-LUXLINE120-72-16MM-13.2W-3500K LM28500-40	
B3056-LUXLINE120-72-16MM-13.2W-2700K LM28500-25		B3056-LUXLINE120-72-16MM-13.2W-4000K LM28500-45	
B3056-LUXLINE120-72-16MM-13.2W-3000K LM28500-35			

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	JUMPER	LEAD IN / OUT	STRIP LENGTH
B3056 - 3 x 5.6mm	LUXLINE120 - 120 volt	72 - 72 LED/m	16mm (% in.)	13.2W/m (4 W/ft)	<input type="checkbox"/> 2400K <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K	JP6 - Jumper 6" JP12 - Jumper 12" NO - No jumper	PG - Plug-in 47" HW - Hardwire 118"	Order in lengths of 1ft (12in.).
B3056	LUXLINE120	72	16mm	13.2W	CCT	JUMPER	IN OUT	LENGTH

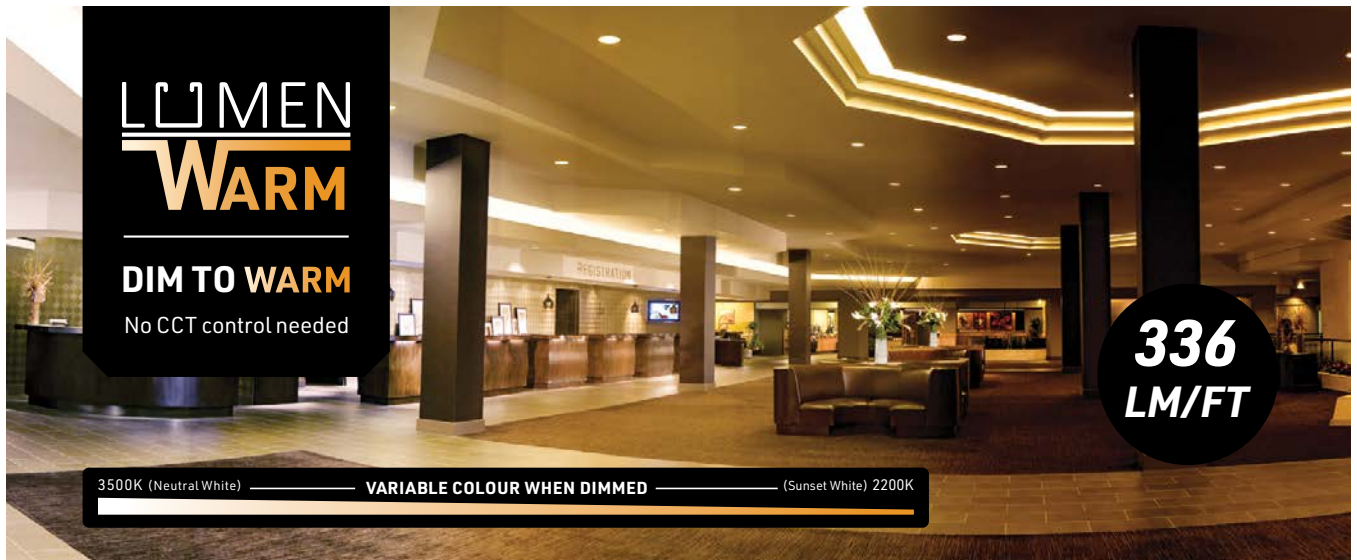


WARMDIM FEATURES

- Dim to warm, variable colour when dimmed.
- A different mood for different times of the day
- No CCT control needed.
- Cuttable every 2.46 inches (14 LEDs).
- 3M double sided tape for easy installation.
- Compatible with PWM controller (PWM is a powerful technique for controlling analog circuits with a microprocessor's digital outputs).



DIMENSIONS

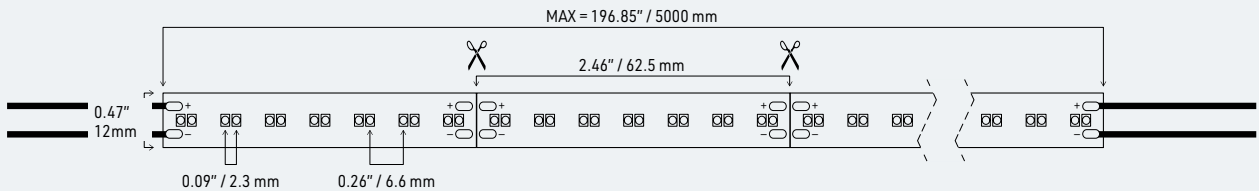

24V LED ENGINE - IP22	QUANTITY	24V LED ENGINE - IP67	QUANTITY
B2016-24V-224-12mm-17.3W-WARMDIM-2200-3500K-IP22 LM28500		B2016-24V-224-12mm-17.3W-WARMDIM-2200-3500K-IP67 LM28500-01	

CUSTOM OPTIONS:

SMD TYPE	INPUT VOLTAGE	LED DENSITY	STRIP WIDTH	RATED POWER	CCT	USAGE	LEAD IN / OUT	STRIP LENGTH
B2016 - 2 x 1.6mm	24V - 24 volt	224 - 224 LED/m	12mm (1/2 in.)	17.3W/m (5.3 W/ft)	WARM DIM	IP22 - indoor dry location IP67 - wet/damp location	HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire cust. DC3 - DC plug 36" DC6 - DC plug 72" DC9 - DC plug 108" DCX - DC plug cust. NO - No lead	Custom length up to 420 inches.

B2016

24V

224

12MM

17.3W

2200-3500K

SMD TYPE
INPUT VOLTAGE
LED/M
WIDTH
W/M
CCT
USAGE
IN
OUT
LENGTH

LED ENGINE

NEON SLEEVE SERIES

Highly durable, flexible,
Uniform pixel free light!



NEON SLEEVES FEATURES

- Attractive modern look for wide variety of applications.
- Silicone material, resistant to yellowing and high temperature, can be used outdoors.
- Soft, flexible.
- Easy modeling and tensile resistance.
- Professional structure design.
- Uniform light, no spots.
- Consistent color temperature.

COMPATIBLE WITH

Color Temperature:

2400K, 2700K, 3000K, 3500K, 4200K, 6200K

Lumen Package:

LP0: 128 LM / 1.5W FT / 90+CRI


LP1: 160 LM / 1.5W FT / 90+CRI

LP2: 255 LM / 3.0W FT / 90+CRI


LP3: 308 LM / 4.5W FT / 90+CRI

LHP: 700LM / 7.0W FT / 95+ CRI


FIVE DIFFERENT MODELS




Mini Side Flex




340 Flex



180 Flex



3D Flex



Top View Flex

NEON SLEEVE

MSF - Mini Side Flex
34F - 340 Flex (LP3 only)
18F - 180 Flex
3DF - 3D Flex
TVF - Top View Flex

COLOR TEMPERATURE

- 24 - 2400K
- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 42 - 4200K
- 53 - 5300K (LHP only)
- 62 - 6200K (LP only)
- WD - WarmDim (TVF only)
- RGB - RGB (TVF only)
- RGBW - RGBW (TVF only)

LUMEN PACKAGE*

LP0 - 128 LM / 1.5W FT / 90+CRI
LP1 - 160 LM / 1.5W FT / 90+CRI
LP2 - 255 LM / 3.0W FT / 90+CRI
LP3 - 308 LM / 4.5W FT / 90+CRI
LHP - 700 LM / 7.0W FT / 95+CRI (TVF only)

Note: Not applicable for WarmDim & RGB color temperatures.

USAGE

IP22 - indoor dry location
IP65 - wet/damp location (not available for MSF)

LEAD IN / OUT

HW3 - Hardwire 36 inches
HW6 - Hardwire 72 inches
HW9 - Hardwire 108 inches
HWX - Hardwire custom inches
DC3 - DC plug 36 inches
DC6 - DC plug 72 inches
DC9 - DC plug 108 inches
DCX - DC plug custom inches
NO - No lead

LENGTH

Total length in inches

NEON SLEEVE

COLOR TEMPERATURE CCT

LUMEN PACKAGE

USAGE

LEAD IN

LEAD OUT

LENGTH (inches)

LED ENGINE

NEON FLEX

Fully dimmable, highly durable, flexible & pixel free







The Neon Flex Topview is designed for indoor architectural projects in commercial installations such as shopping centres, hotels, restaurants and many other applications. Side view can be flexed "up & down" with a maximum radius of 5 in.

NEON FLEX FEATURES

- Forward Voltage 24VDC
- Forward Current 183mA/ft
- LED Density 73 LED/ft
- Power <4.4W/ft
- Width 0.375 in
- Thickness 0.375 in
- Length 196 in (16.4 ft)
- Min. Bending Diameter 5 in
- Can Be Cut Anywhere
- IP Grade IP65
- CRI 90+



LED

NEON SLEEVE	COLOR TEMPERATURE	LENGTH
NF - Neon Flex	 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K	Total length in inches
NF		
NEON FLEX	COLOR TEMPERATURE CCT	LENGTH (inches)

POWER SUPPLIES

Lighting under control! Our comprehensive range of power supplies includes **dimnable electronic drivers**, compatible with most ELV (Triac / forward phase / reverse phase) or 0-10V dimmers. Used directly on standard 120VAC input, they are available in **constant voltage** output (12VDC or 24VDC) for common LED light sources, also in **constant current** output for special applications. Many power supplies are available in **custom junction boxes** for extra protection and superior lifespan. Featured below is a selection of our most popular products in constant voltage output.



12V DIMMABLE DRIVERS IN JUNCTION BOXES























Product code	LTPS-DIM-100 130VAC-CV-12V-25W-ELV-HW-DRBX	LTPS-DIM-100 130VAC-CV-12V-50W-ELV-HW-DRBX	LTPS-DIM-100 130VAC-CV-12V-120W-ELV-HW-IP67-DRBX	LTPS-DIM-100 130VAC-CV-12V-200W-ELV-HW-IP67-DRBX
Input Type	Hardwire	Hardwire	Hardwire	Hardwire
Input Voltage	100-130VAC	100-130VAC	100-130VAC	100-130VAC
Output Voltage	12VDC	12VDC	12VDC	12VDC
Rated Power (max.)	25W	50W	120W	200W
IP Rating	IP20	IP20	IP67	IP67
Dimming				
IEC Protection	Class 2	Class 2	Class 1	Class 1
Ground Class				
Certification	 CUL US LISTED E309419 CIP-CV-121F	 CUL US LISTED E309419 CIP-CV-121T	 CUL US LISTED E309419 CIP-CV-120T	 CUL US LISTED E309419 CIP-CV-121X

12V NON-DIMMABLE DRIVERS























Product code	PS-CV-120-24-1000mA-24W-WH-PG	PS-CV-120-12-5000mA-60W-BK-DK	LTPS-VS-12VDC-60W-IP65-HW	LTPS-IPS-12VDC-60W-IP66-HW	LTPS-IPS-12VDC-100W-IP66-HW	LTPS-IPS-12VDC-200W-IP66-HW
Input Type	Plug-in	Plug-in, desktop	Hardwire	Hardwire	Hardwire	Hardwire
Input Voltage	100-240VAC	100-240VAC	100-240VAC	100-277VAC	100-277VAC	100-277VAC
Output Voltage	12VDC	12VDC	12VDC	12VDC	12VDC	12VDC
Rated Power (max.)	24W	60W	60W	60W	100W	200W
IP Rating	IP22	IP22	IP65	IP66	IP66	IP66
Dimming						
IEC Protection	Class 2	Class 2	Class 2	Class 2	Class 1	Class 1
Ground Class						
Certification	 CUL US LISTED E309419 XY243-12020000-UD	 CUL US LISTED E309419 XY605-12050000-UD	 CUL US LISTED E309419 LD060-CU50012-40	 CUL US LISTED E309419 VF-1206001310	 CUL US LISTED E309419 VF-1206001310	 CUL US LISTED E309419 VD-1206000710

24V DIMMABLE DRIVERS IN JUNCTION BOXES






					
Product code	LTPS-DIM-100 130VAC-CV-24V-25W-ELV-EN-DRBX	LTPS-DIM-100 130VAC-CV-24V-50W-ELV-HW-DRBX	LTPS-DIM-100 130VAC-CV-24V-96W-ELV-HW-IP67-DRBX	TFT-DIM-PS-100 130VAC-CV-24V-200W-ELV-HW-IP67-DRBX (LM42496-05)	LTPS-DIM-110 277VAC-CV-24V-100W-0-10V-IP66-DRBX
Input Type	Hardwire	Hardwire	Hardwire	Hardwire	Hardwire
Input Voltage	100-130VAC	100-130VAC	100-130VAC	100-130VAC	100-277VAC
Output Voltage	24VDC	24VDC	24VDC	24VDC	24VDC
Rated Power (max.)	25W	50W	96W	200W	100W
IP Rating	IP20	IP20	IP67	IP67	IP66
Dimming					
IEC Protection	Class 2	Class 2	Class 2	Class 1	Class 2
Ground Class					
Certification					






24V NON-DIMMABLE DRIVERS

					
Product code	PS-CV-120-24-2500mA-60W-WH-DK	LTPS-IPS-24VDC-60W-IP66-HW	PS-CV-120-24-4A-96W-BK-DK	LTPS-IPS-24VDC-96W-IP66-HW	LTPS-IPS-24VDC-200W-IP66-HW
Input Type	Plug-in, desktop	Hardwire	Plug-in, desktop	Hardwire	Hardwire
Input Voltage	100-240VAC	100-277VAC	100-240VAC	100-277VAC	100-277VAC
Output Voltage	24VDC	24VDC	24VDC	24VDC	24VDC
Rated Power (max.)	60W	60W	96W	96W	200W
IP Rating	IP22	IP66	IP22	IP66	IP66
Dimming					
IEC Protection	Class 2	Class 2	Class 2	Class 2	Class 1
Ground Class					
Certification					

POWER SUPPLY / PRODUCT CODE

QUANTITY


-  Certified by UL (Underwriters Laboratories) for Canada and the United States concerning North American safety and electrical standards governing this product.
-  Components recognized by UL (Underwriters Laboratories).
-  Product tested by Intertek and found in compliance with accepted national standards.
-  Manufacturer statement of product compliance with relevant European Union directives and standards.
-  Restriction of hazardous materials in electronic and electrical equipment.

-  Can be used with electronic low voltage (ELV), TRIAC, forward-phase and reverse-phase dimmers.
-  Can be used with 0-10V dimmers.
-  Cannot be used with dimmers.
-  Ground Class 1
-  Ground Class 2

HIGH EFFICIENCY
REFLECTOR

NEW! HER

Significantly improves
luminous efficiency!

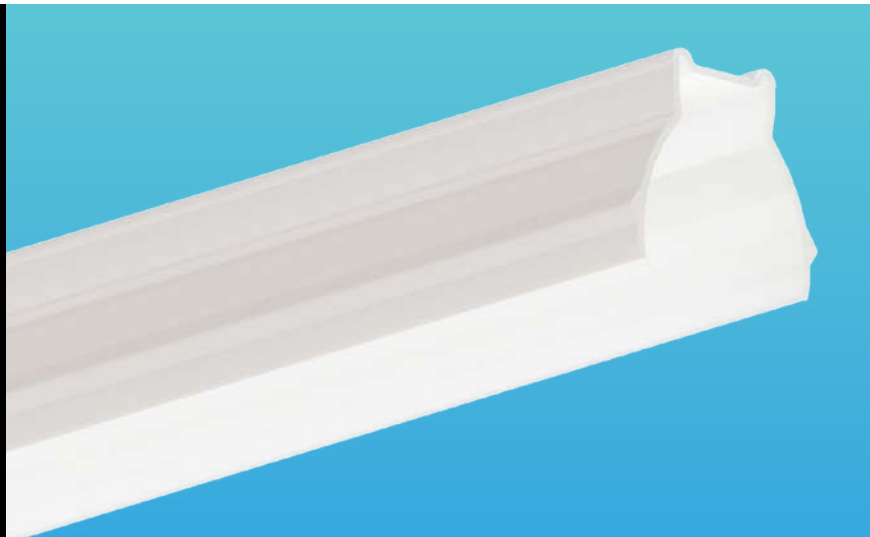

HER - HIGH EFFICIENCY REFLECTOR

Achieve maximum luminous flux with the **HER** (High Efficiency Reflector)! With its engineered design, this new reflector significantly improves luminous efficiency and provides lighting without loss of light. An ingenious idea that surpasses the use of white reflective paint to maximize lighting.

Even better, the LuxLine 120 V light source fits perfectly at the base of the reflector: forget about 3M foam tape or clips to hold it in place: it fits like a glove! The HER reflector is suitable for **1450, 8500, 8600, 8800 and 9400 series** aluminum profiles.

LUMENSENS

MOTION SENSOR

30 sec. and 4 min. options.
Compatible with 1200, 1300,
1400, 1500, 1650 & 1690.



Turns on automatically when it detects your presence and regulates the amount of light in case of absence. Internal and external installation options available.

Compatible with series: 1200 / 1300 / 1400 / 1500 / 1650 / 1690

RANGE OF PRODUCTS

Integrated Motion Sensor **30 sec.:** LM16000-5
Integrated Motion Sensor **4 min.:** LM16000-15

Remote Motion Sensor **30 sec.:** LM16000-20
Remote Motion Sensor **4 min.:** LM16000-24

DEMO BOXES

New! We now offer demo boxes with samples of our products. Aluminum profiles, recessed and LED light sources are available free of charge*. To order your demo box, please check the product box and send us your request by fax or email. To order products, please contact your authorized representative or agent.

* Taxes payable where applicable / U.S. and Canada only.




KEYCHAIN - DEMO BOX

INCLUDED

- 1450 Profile - Prime lens
- 1201 Profile - Optiflex lens
- Power supply 24V - 24W
- 1100 Profile - Opal lens
- 1201 Profile - Optiflex lens
- 1300 Profile - Optiflex lens
- 1400 Profile - Prime lens
- 1450 Profile - Prime lens
- 1650 Profile - Opal lens
- 1690 Profile - Opal lens
- 2000 Profile - Opal lens
- 3100 Profile - Prime lens
- 4400 Profile - Optiflex lens
- 4500 Profile - Clear lens
- 5300 Profile - Opal lens
- 7850 Profile - Opal lens
- 8800 Profile - Prime lens

KEYCHAIN DEMO BOX

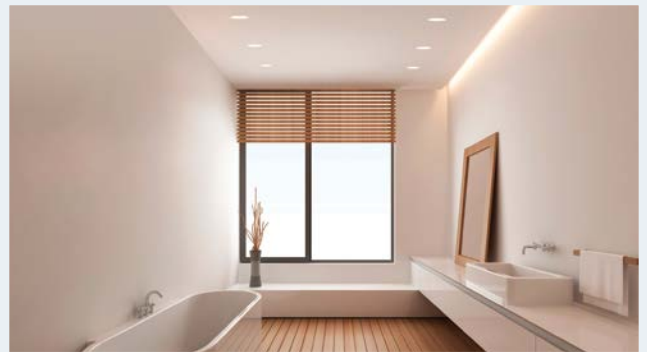

OMEGA - DEMO BOX

INCLUDED

- Omega Module
- Trim Square Adjustable - White
- Trim Round Adjustable - White
- Beam 60 degrees, Beam 36 degrees & Beam 22 degrees
- Power Supply 6W
- Suction cup

OMEGA DEMO BOX




LUXLINE - DEMO BOX

INCLUDED

- LuxLine LED Strip + AC Plug (38")
- LuxLine120 - DIY Kit Plug-in (47")
- LuxLine120 - DIY Kit Hardwire (40")
- Series 1450 Profile Alu, 6.75"
 - + Series 1450 Prime Lens, 6.75"
 - + Series 1450 Clip PVC (x2)
- LuxLine120-Bracket (x4)

LUXLINE DEMO BOX

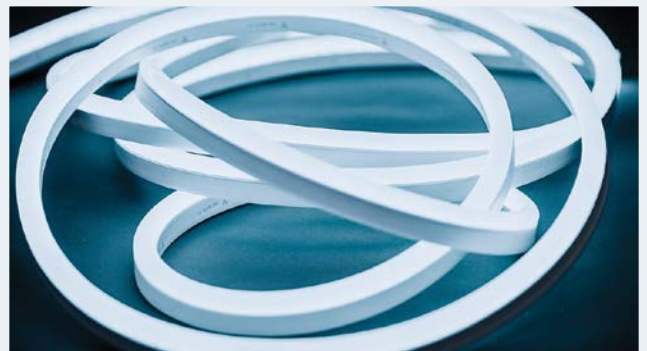

NEON SLEEVES - DEMO BOX

INCLUDED

- 360 Flex 16": 14.5W - 4200K
- 180 Flex 9"
- 3D Flex 9"
- Mini Side Flex 9"
- Top View Flex 9"
- Power Supply: 24V - 24W
- Top View Endcaps + Clips
- Lumentruss Badges

NEON SLEEVES DEMO BOX


APPENDIX

APPENDIX 1 - RAL COLOR №

RAL is a color matching system which defines colors for paint, coatings and plastics. RAL Classic is the most famous and widely used system. The colors are used in architecture, construction, industry and road safety. When choosing a custom profile color, you must then provide a RAL color №. Please refer to the following website to choose a color and its matching RAL number:

www.ralcolor.com

Example

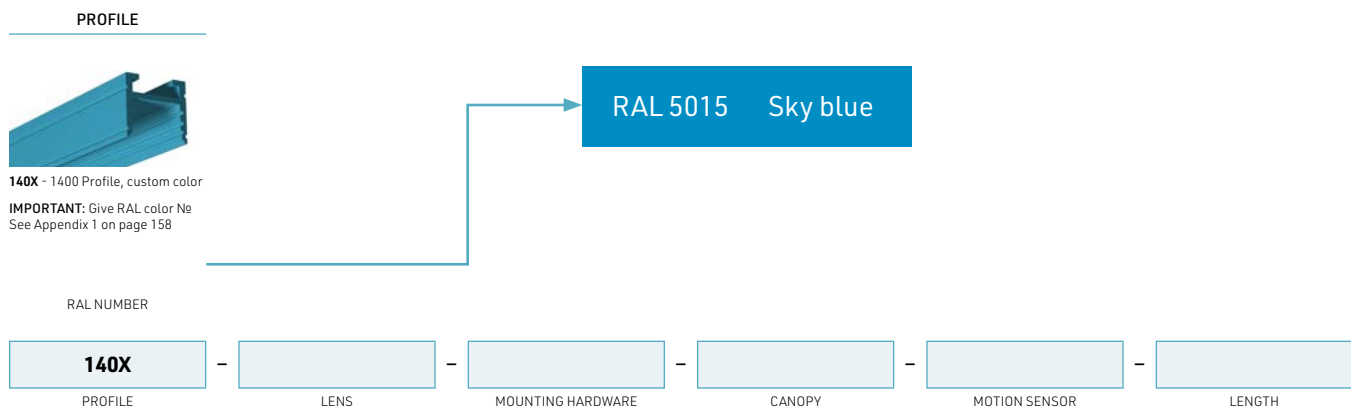

APPENDIX 2 - CANOPY OPTIONS

Canopy installation options:



Remote driver canopy plate

The driver is installed in a remote location and then secondary power is fed to a junction box, comes with a 4-inch canopy cover.



Integrated driver in canopy

The driver is installed inside a rectangle canopy that can be installed to an electrical junction box. Size may vary according to driver.



Integrated driver & suspension kit

The driver is installed into the canopy and the suspension kit are installed onto the canopy cover, that in turn is connected to a junction box.

APPENDIX 3 - HOW TO CALCULATE HOW MANY SECTIONS OF 8 FEET TO ORDER

Some products are only available in straight section of 8 feet (96 inches), namely the 3100, 8860, 8900 and the whole Gypsum Series. Here's an example on how to calculate how many sections to order:


Example


Walls Profiles

$$192 + 120 + 67 + 86 + 125 = 590 \text{ in}$$

$$590 \div 96 = 6.15$$

6.15 rounded up = **7 sections total**

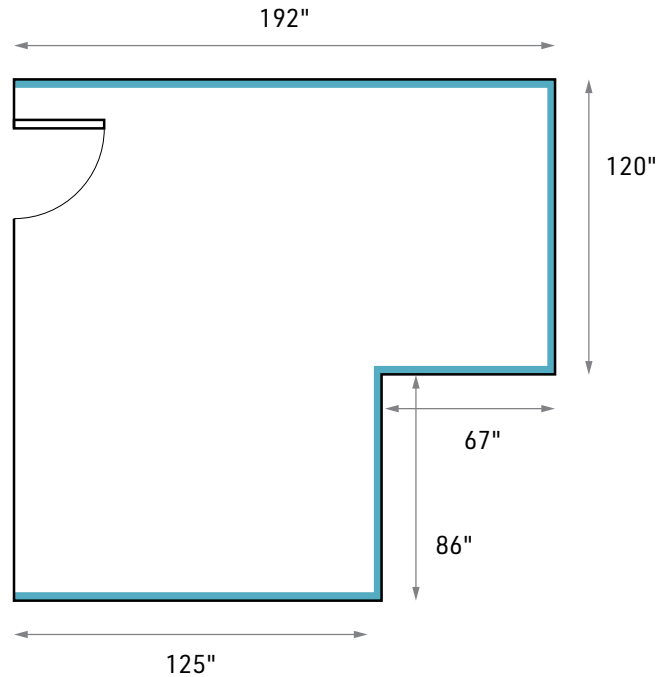










PROFILE	LENGTH
	Available in straight section of 8 feet (96 inches/2.4 m). *Cut on site
7 QUANTITY	96 INCHES LENGTH

HOW TO CALCULATE TOTAL LED ENGINE ORDERING LENGTH

Those same products only available in straight section of 8 feet will not have the LED engine preinstalled. For these profiles where the LED engine will be assembled on site, you need to specify the length when ordering.

Order each length separately: 192 + 120 + 67 + 86 + 125

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	LENGTH	
 24 - 2400K	LP0 - 128 LM / 1.5W FT / 90+CRI	HW3 - Hardwire 3 FT	I - IP22 indoor dry location	A - Non-dimming	Total length of LED engine in inches - See Appendix 3 on how to calculate length.	
 27 - 2700K	LP1 - 160 LM / 1.5W FT / 90+CRI	HW6 - Hardwire 6 FT		B - ELV dimming 120V AC		
 30 - 3000K	LP2 - 255 LM / 3.0W FT / 90+CRI	HW9 - Hardwire 9 FT		C - ELV dimming 120/277V AC		
 35 - 3500K	LP3 - 308 LM / 4.5W FT / 90+CRI	HWX - Hardwire custom FT		D - 0/10V dimming 120/277V AC		
 42 - 4200K	LHP - 700 LM / 7.0W FT / 95+CRI	DC3 - DC plug 3 FT		E - Non-dimming DC plug in		
 53 - 5300K (LHP only)	Note: Not applicable for WarmDim & RGB color temperatures	DC6 - DC plug 6 FT		F - DMX		
 62 - 6200K (LP only)		DC9 - DC plug 9 FT		NO - No driver		
 RGB - RGB		DCX - DC plug custom FT				
 RGBW - RGBW		NO - No lead				
						192"
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL		LED ENGINE LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.

APPENDIX

APPENDIX 5 - BRACKET CHART

PROFILE	2 BRACKETS	4 BRACKETS	6 BRACKETS	8 BRACKETS	10 BRACKETS	11 BRACKETS	12 BRACKETS
1100	1-36	37-108	109-180	181-240	-----	-----	-----
1200	1-36	37-108	109-180	181-240	-----	-----	-----
1400	1-36	37-108	109-180	181-240	-----	-----	-----
1500	1-36	25-72	109-180	181-240	-----	-----	-----
1650	RED DOUBLE FACE TAPE 10MM(ROLL 33 METERS) (1033) LM21027-22						
1690	0-24	37-108	73-120	121-168	169-192	193-216	214-240
1800	1-36	37-108	109-180	181-240	-----	-----	-----
2000	1-36	37-108	109-180	181-240	-----	-----	-----
2100	1-36	37-108	109-180	181-240	-----	-----	-----
4400	1-36	37-108	109-180	181-240	-----	-----	-----
4500	1-36	37-108	109-180	181-240	-----	-----	-----
7650	1-36	37-108	109-180	181-240	-----	-----	-----
7800	1-36	37-108	109-180	181-240	-----	-----	-----
7850	1-36	37-108	109-180	181-240	-----	-----	-----
9200	1-36	37-108	109-180	181-240	-----	-----	-----
9400	1-36	37-108	109-180	181-240	-----	-----	-----
9500	0-24	25-72	73-120	121-168	169-192	193-216	217-240

HEAT SINK	2 BRACKETS	3 BRACKETS	4 BRACKETS	5 BRACKETS	6 BRACKETS	7 BRACKETS	9 BRACKETS	10 BRACKETS	11 BRACKETS	12 BRACKETS
9499I	1-36	37-108		109-180		181-240		-----	-----	-----
9800I	1-36	37-108		109-180		181-240		-----	-----	-----

APPENDIX 6 - VOLTAGE DROP CHART


Voltage Drop for 12 VDC for 1.5W / Foot LED Tape				Voltage Drop for 24 VDC for 1.5W / Foot LED Tape				Voltage Drop for 24 VDC for 2.9W / Foot LED Tape				Voltage Drop for 24 VDC for 4.4W / Foot LED Tape			
Dist.	18AWG	20AWG	22AWG	Dist.	18AWG	20AWG	22AWG	Dist.	18AWG	20AWG	22AWG	Dist.	18AWG	20AWG	22AWG
5 ft.	11.87 V	11.80 V	11.68 V	5 ft.	11.93 V	11.90 V	11.84 V	5 ft.	23.87 V	23.80 V	23.68 V	5 ft.	23.81 V	23.70 V	23.52 V
10 ft.	11.74 V	11.59 V	11.35 V	10 ft.	11.87 V	11.80 V	11.68 V	10 ft.	23.74 V	23.59 V	23.35 V	10 ft.	23.62 V	23.39 V	23.03 V
15 ft.	11.62 V	11.39 V	11.03 V	15 ft.	11.81 V	11.70 V	11.52 V	15 ft.	23.62 V	23.39 V	23.03 V	15 ft.	23.43 V	23.09 V	22.55 V
20 ft.	11.49 V	11.19 V	10.71 V	20 ft.	11.74 V	11.59 V	11.35 V	20 ft.	23.49 V	23.19 V	22.71 V	20 ft.	23.23 V	22.78 V	22.06 V
25 ft.	11.36 V	10.98 V	10.39 V	25 ft.	11.68 V	11.49 V	11.19 V	25 ft.	23.36 V	22.98 V	22.39 V	25 ft.	23.04 V	22.48 V	21.58 V
30 ft.	11.23 V	10.78 V	10.06 V	30 ft.	11.62 V	11.39 V	11.03 V	30 ft.	23.23 V	22.78 V	22.06 V	30 ft.	22.85 V	22.17 V	21.09 V
35 ft.	11.11 V	10.58 V	9.74 V	35 ft.	11.55 V	11.29 V	10.87 V	35 ft.	23.11 V	22.58 V	21.74 V	35 ft.	22.66 V	21.87 V	20.61 V
40 ft.	10.98 V	10.38 V	9.42 V	40 ft.	11.49 V	11.19 V	10.71 V	40 ft.	22.98 V	22.38 V	21.42 V	40 ft.	22.47 V	21.56 V	20.13 V
45 ft.	10.85 V	10.17 V	9.09 V	45 ft.	11.43 V	11.09 V	10.55 V	45 ft.	22.85 V	22.17 V	21.09 V	45 ft.	22.28 V	21.26 V	19.64 V
50 ft.	10.72 V	9.97 V	8.77 V	50 ft.	11.36 V	10.98 V	10.39 V	50 ft.	22.72 V	21.97 V	20.77 V	50 ft.	22.08 V	20.95 V	19.16 V
55 ft.	10.60 V	9.77 V	8.45 V	55 ft.	11.30 V	10.88 V	10.22 V	55 ft.	22.60 V	21.77 V	20.45 V	55 ft.	21.89 V	20.65 V	18.67 V
60 ft.	10.47 V	9.56 V	8.13 V	60 ft.	11.23 V	10.78 V	10.06 V	60 ft.	22.47 V	21.56 V	20.13 V	60 ft.	21.70 V	20.34 V	18.19 V
65 ft.	10.34 V	9.36 V	7.80 V	65 ft.	11.17 V	10.68 V	9.90 V	65 ft.	22.34 V	21.36 V	19.80 V	65 ft.	21.51 V	20.04 V	17.70 V
70 ft.	10.21 V	9.16 V	7.48 V	70 ft.	11.11 V	10.58 V	9.74 V	70 ft.	22.21 V	21.16 V	19.48 V	70 ft.	21.32 V	19.74 V	17.22 V
75 ft.	10.08 V	8.95 V	7.16 V	75 ft.	11.04 V	10.48 V	9.58 V	75 ft.	22.08 V	20.95 V	19.16 V	75 ft.	21.13 V	19.43 V	16.74 V
80 ft.	9.96 V	8.75 V	6.83 V	80 ft.	10.98 V	10.38 V	9.42 V	80 ft.	21.96 V	20.75 V	18.83 V	80 ft.	20.93 V	19.13 V	16.25 V
85 ft.	9.83 V	8.55 V	6.51 V	85 ft.	10.91 V	10.27 V	9.26 V	85 ft.	21.83 V	20.55 V	18.51 V	85 ft.	20.74 V	18.82 V	15.77 V
90 ft.	9.70 V	8.34 V	6.19 V	90 ft.	10.85 V	10.17 V	9.09 V	90 ft.	21.70 V	20.34 V	18.19 V	90 ft.	20.55 V	18.52 V	15.28 V
95 ft.	9.57 V	8.14 V	5.87 V	95 ft.	10.78 V	10.07 V	8.93 V	95 ft.	21.57 V	20.14 V	17.87 V	95 ft.	20.36 V	18.21 V	14.80 V
100 ft.	9.45 V	7.94 V	5.54 V	100 ft.	10.67 V	9.97 V	8.77 V	100 ft.	21.45 V	19.94 V	17.54 V	100 ft.	20.17 V	17.95 V	14.31 V

PHOTO CREDITS

Maxime Brodeur: Cover, Inside front cover, pp. 2-3, pp. 8-9, p. 12, p. 20 (right), p. 50 (left), pp. 72-73, p. 78 (left), p. 80 (right), p. 86 (left), pp. 130-131, pp. 136, 137, 138, Back cover.

Maxime Brouillet: p. 64 (left), pp. 84-85, p. 86 (right), p. 149.

NOTES

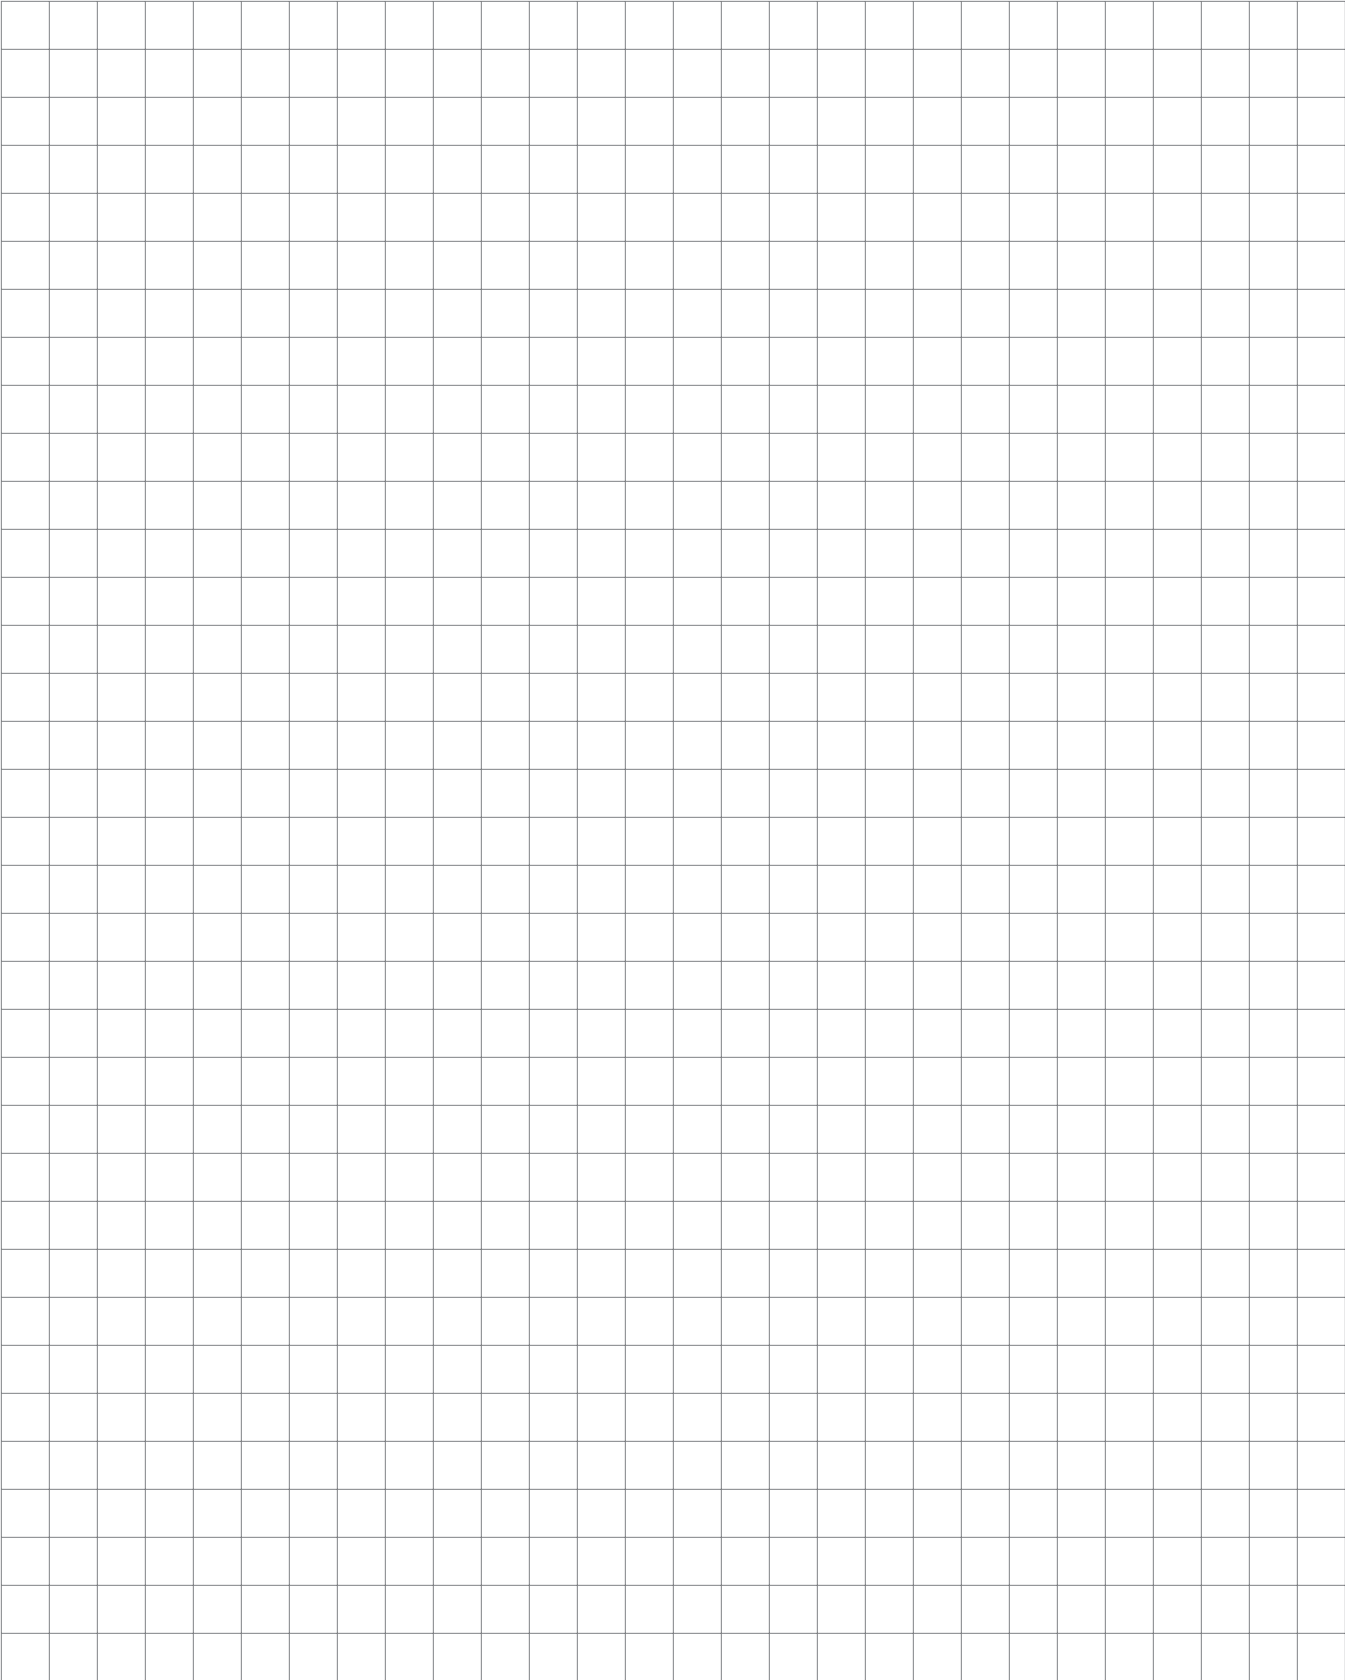



CONTACT US

ADDRESS
9221 Edison
Montreal, Quebec,
H1J 1T4, Canada

FAX
1.514.903.0649

EMAIL
info@lumentruss.com

PHONE
1.855.384.3384

WEBSITE
www.lumentruss.com



**MADE IN
NORTH AMERICA**

**LUMEN™
Truss**