

P5730-80-700mA-16W-3000K-36"-IP22 Specification Sheet



PHYSICAL



Product Type	Rigid PCB LED Strip	
SMD Type	5730	
Strip Width	1/2 in	12.4 mm
Strip Length	35 in	889 mm
Number of LED Chips	80 LED	
Lifespan	50 000 Hrs	
IP Code (IEC standard 60529)	IP22	

ELECTRICAL


Input Type	DC, Constant Current	
Input Voltage	700 mA	
Rated Power (Max.)	16W Total	

LIGHTING

Luminous Flux	2277.56 lm	
Luminous Efficacy	137.2 lm/W	
Correlated Color Temperature	3000K (Warm White)	
Colour Rendering Index	83.1	
R9	15	
duv (black-body curve deviation)	-0.0010	

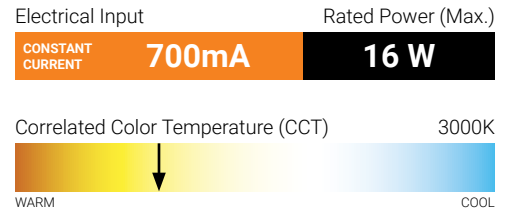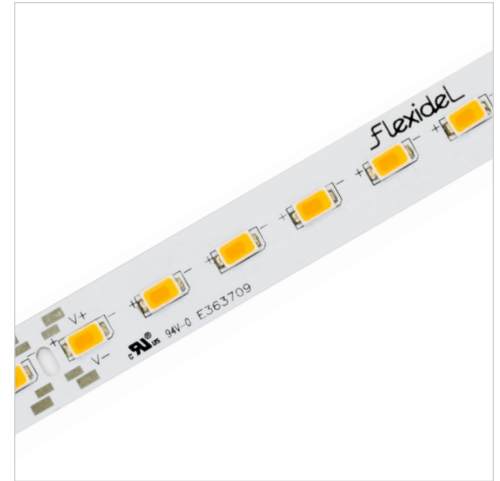

DIMENSIONS

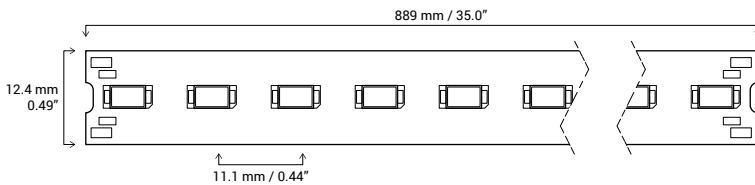

P5730-80-700mA-16W-3000K-36"-IP22

Test Data for Full PCB Strip (80 LED/35in)



Chroma Parameters

Chromaticity Coordinates: x=0.4317, y=0.3998, u=0.2491, v=0.3459, duv=-0.0010
 Correlated Color Temperature: 3056K
 Dominant Wave.: 583.0nm
 Purity: 49.6%
 Flux RGB Ratio: R=22.6%, G=75.8%, B=1.7%
 Peak Wave: 606.7nm
 Half Width: 137.1nm

Rendering Index: Ra=83.1

R1=82 R2=91 R3=96 R4=79 R5=80 R6=88 R7=86 R8=64
 R9=15 R10=78 R11=77 R12=68 R13=84 R14=98 R15=76


Photo Parameters

Luminous Flux: 2277.56 lm
 Luminous Efficacy: 137.2 lm/W
 Radiant Flux: 7515.4 mW
 Iv: 0.0 mcd

Electrical Parameters

Voltage: U=23.8V
 Current: I=700mA
 Power: P=16.6W
 Power Factor: PF=1.000

C.I.E. 1931 Chromaticity Diagram

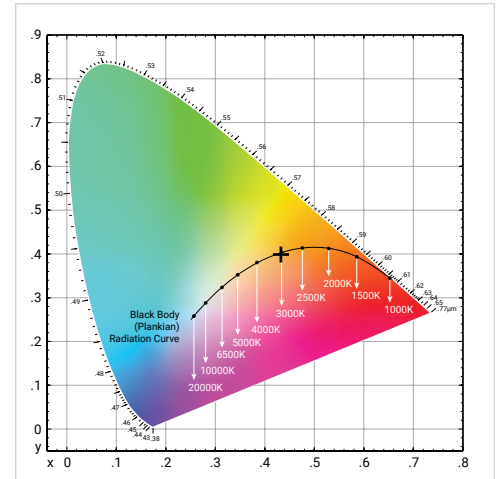

Spectral Ratio: R=43.2%, G=44.8%, B=12.1%

